AN ARGUS SPECIALIST PUBLICATION

October/
November 1984

ZX Computing goes pan-Atlantic—

see inside!

ZX COMPUTING

£1.95

£4.75 INC. VAT RETAIL

Britain's Best Buy For The Sinclair User

Over 130 poges of information and programs for the ZX Spectrum, ZX81 and ZX80

Here Be Dragons

read our guide to writing adventure programs

LOGO and Logs cut down to size

Calling all Tunesmiths! make music with the Minstrel

Beat the weather men with our ZX81 meteorological plotting program

As seen in the national press

WIN A DREAM HOLIDAY

in our GREAT COMPETITION

COMBAT LYNX

from DUREL

(Technical Support from Westland Helicopters)

Available now from most retail outlets

COMMODORE 64
SPECTRUM 48k

Available soon

ORIC — BBC
AMSTRAD

DUREL sales dept.,
Castle Lodge, Castle Green, Taunton, Somerset, TA1 4AB

"YOUR SERVICE IS 6 TIMES QUICKER THAN ANYTHING ELSE I KNOW"

(David Reeder, Ilford)

Thanks for all your letters from over 40 countries We'll continue to try to **SEND OUT YOUR PROGRAMS ON THE DAY WE GET YOUR ORDER** And we'll send you **FREE** - our latest catalogue of Spectrum best We're the only cut price to play every single game choose the best leave out the rest and then quote all the reviews too! **ALL GAMES WORK WITH KEYBOARD CONTROL AND JOYSTICK AS SHOWN** UK prices include VAT export prices are the same (Plus 15% surcharge helps us to get foreign orders to you very fast indeed) Call 01 789 8546 any time to order by Access or Visa card from any country where your own laws allow this
The **CURRAH SPEECH SYNTHESISER** is very popular If you **don't** buy one the Currah compatible games work perfectly well If you do own Currah Speech it brings the games to life in the most amazing way!

ALL PROGRAMS REQUIRE 48K

SPECIAL OPERATIONS

"Nice class and makes good use of graphics" (CompChoice) "Requires imagination and needs planning to play well" (S.User) This graphics and text air war game has 7 play levels 18 commands Select your Special Operations team choose your mission set your own time limit Split screen text graphics The most involving game yet from Lothlorien NO STIX **(Lothlorien) £5.95**

WAR OF THE WORLDS

"STUNNING GRAPHICS, switch one identical to the pictures supplied with the LP" (GamesComp) Animated musical graphical adventure Find Eliza Doolittle each on the right day to rescue Carrie and save the world Great (Jeff Wayne) music huge scrolling graphics as you try to avoid the Martian Fighting Machines each with its own personality
STIX Pronto/AGF/Cursor **CURRAH SPEECH OK (CRL) £7.95**

COMPLETE MACHINE CODE

"The Complete Machine Code Tutor" loads over 100K of data in 4 parts from two cassettes This step by-step guide with 33 lessons and exercises should convert a BASIC programmer into a writer of complex machine-code programs for the Spectrum All exercises on screen user friendly assembler helps you spot errors and correct them Covers all machine-code instructions the Z80 processor can handle 24-page manual By MALCOM EVANS of "Trashman" fame! NO STIX
(New Generation) £14.95

WHITE LIGHTNING

"White Lightning is the best package I have used on the Spectrum. Its features and flexibility are second to none and here to be seen to be believed" (PCW) The first true sprite manipulation language brings any arcade game within your power to write! NO KNOWLEDGE OF MACHINE CODE NECESSARY to use this Forth based program with nearly 300 commands Up to 256 sprites with your own dimensions A separate 20K SPRITE DESIGNER is included with 167 pre defined characters Telephone help line from the makers too! This must be the best key yet to creating and selling your own programs 130 page manual 2 cassettes **(Oasis) £14.95**

WORSE THINGS

"One of the most original games of '84... incredibly addictive, playable game" (Crash) WORSE THINGS HAPPEN AT SEA as you try to take your cargo ship from port to port before it sinks Full-screen animated graphics as you search the ship for leaks On later journeys watch out as the ship wanders off course run out of the engine overheats! Great tunes not STIX Cursor/Interface2
(Silversoft) **£5.50**

SABRE WULF

"State-of-the-art Spectrum software ... the graphics are superb" (Crash) "Possibly even Ultimate's most impressive game" (PopCompWkly) Beautiful really wonderful jungle maze for you to explore Avoid the charging rhinos slippery snakes warthogs bears and all the other animated animals Search for the four pieces of the Sabre Wulf mask then see what happens It will take you a very long time
STIX Kempston/Cursor/Interface2 (Ultimate) **£9.95**

TORNADO LOW LEVEL

Not a flight simulation it's easier to operate and more exciting too! Fly your swing wing supersonic tornado (you can watch from above) Fly low to wipe out enemy targets land or take off The 3D landscape you fly over as the bits we've seen and your radar actually shows a map not just blobs! All the thrills of real flying STIX Interface2 (Vortex) **£5.95**

LORDS OF MIDNIGHT

"THE GRAPHICS ARE SUPERB... It's obviously going to be an outstanding success" (PopCompWkly) Most elaborate adventure yet as you explore the land of Midnight You see it only through the eyes of the characters you control You will see only what they see from where they stand 32 000 different views Choice of two adventures The whole family can play by controlling one character each 32 page illustrated manual PRIZE too!
STIX None (Beyond) **£9.95**

PAINTBOX

"I've never had so much fun with a utility program" (ZXComp) "A powerful graphics aid. It's possible for even a beginner to draw reasonable pictures" (S.User) "If you've been looking for a Spectrum graphics and this seems like one of the best" (PopCompWkly) "One of the most outstanding programs I've seen this year" (Tribune) If you want to draw you need PAINTBOX STIX Kempston any cursor Printer/Plotter **£7.70**

JACK & THE BEANSTALK

The animated graphics get better and better As each [illegible] you must [illegible] to jump over the giant Watch out for the caterpillars and mind where you step OUT can you even climb the beanstalk first without being eaten by the bugs Very talkative beautifully-drawn game
STIX Kempston [illegible] **CURRAH SPEECH OK.** (Thor) **£1.00**

CURRAH SPEECH

Makes your Spectrum talk Use it with talking games and/or teach your Spectrum to say any word or sentence you like in English Free demo cassette and talking adventure If you wish to use a joystick as well as Currah Speech you will also need the **CURRAH SLOT** expandable motherboard The lets you plug any two things into your Spectrum with without interface 1 **CURRAH SPEECH £29.95. CURRAH SLOT £14.95.**

AUTUMN SUPER SAVERS

JET-SET WILLY (Software Projects)	**NOW £4.95**	**SAVE £1.00**
This game is one you simply can't afford to miss (PC Games)		
THE FOREST (Phipps)	**NOW £7.95**	**SAVE £1.00**
"The world's most realistic adventure game" (PCNews)		
KRAKATOA (Abbex)	**NOW £4.95**	**SAVE £1.00**
Marvellous excellent graphics" (Crash)		
WHEELIE (Microsphere)	**NOW £4.95**	**SAVE £1.00**
Ex mark graphics of a little marvel (PCNews)		
PENETRATOR (Melbourne House)	**NOW £4.95**	**SAVE £1.00**
The classic graphic Scramble		
THE PYRAMID (Fantasy)	**NOW £3.95**	**SAVE £1.95**
An essential addition to any collection (PeanCompNews)		

To: SOFTWARE SUPERMARKET, 17 Howards Lane London SW15 6NU

If you do not want to cut this magazine write your order out carefully on plain game and quote the number **ZX6**
I own a [illegible] K computer which is a SPECTRUM I enclose a cheque/PO made payable to Software Supermarket OR Charge my VISA/ACCESS/EUROCARD/MASTERCARD number [ ][ ][ ][ ] [ ][ ][ ][ ] [ ][ ][ ][ ] [ ][ ][ ][ ]

Signature
Please write clearly If we can't read it, you won't get it
Name
Address

Postcode
Phone if any in case of query

PROGRAM NAME	Price
	£
	£
	£
	£
	£
	£
POSTAGE AND PACKING — U K Add 55p only per order	£0 55p
POSTAGE AND PACKING — EUROPE Add 55p for each program	£
POSTAGE AND PACKING — OUTSIDE EUROPE Add £1 for each program airmail	£
OUTSIDE EUROPE ADD £ TO TOTAL FOR REGISTERED MAIL. TOTAL	£

SOFTWARE SUPERMARKET

VISA/ACCESS CALL 01-789 8546 (24hrs)

ZX COM

Editor Ray Elder
Editorial Assistant Jamie Clery
Group Editor Wendy J Palmer
Sales Executive Penny Scoular
Advertisement Manager Barry Bingham
Divisional Advertising Manager Beverley McNeill
Copy Controller Ann McDermott
Managing Editor Ron Harris
Chief Executive T J Connell

Origination and design by MM Design & Print
Circus House, 26 Little Portland Street London W1N 5AF

Published by Argus Specialist Publications Ltd,
1 Golden Square, London W1R 3AB

CONTENTS

ASP FIGHTS SOFTWARE PIRACY

Much has been said and written in condemnation of software piracy but few have taken a positive stand against it. ASP is among those few that have taken action to help curb the grave problem of home copying of commercial software.

ASP has already taken steps to eliminate advertisements in our magazines which relate to tape duplication for piracy purposes. While it is appreciated that individuals may take back up copies of their own programs it should be noted that it is *ILLEGAL* to copy commercially available software for other than personal use.

Software piracy is costing the software industry huge sums of money which is detrimental to the future development of the industry. It is in everybody's interests to dramatically reduce the level of software piracy primarily because firms have funds raised from software sales to plough back into research and development of new products. This means that the standard of software products can only improve.

ASP hopes our action will help combat the serious problem in order to maintain and improve the high standards of the UK software industry. We are asking you to do the same by refraining from duplicating or copying commercially available software for anything other than personal use.

PUTING

ZX Computing is published bi monthly on the fourth Friday of the month Distributed by Argus Press Sales & Distribution Ltd 12 18 Paul Street, London EC2A 4JS 01 247 8233 Printed in the UK by Garnett Print Rotherham and London

Subscription rates UK £12 70 including postage Airmail and other rates upon application to ZX Computing Subscriptions Interest Ltd Times House 179 The Marlowes Hemel Hempstead Herts HP1 1BB (Tel 0442 48432)

ZX Computing is constantly on the look out for well written articles and programs If you think that your efforts meet our standards please feel free to submit your work to us for consideration for publication

All submitted material should be typed if possible handwritten work will be considered but please use your neatest handwriting Any programs submitted should be listed a cassette of your program alone will not be considered All programs must come complete with a full explanation of the operation and where relevant the structure Spectrum programs should be accompanied with a cassette of the program as well as the listing

All submissions will be acknowledged and the copyright in such works which will pass to Argus Specialist Publications Ltd will be paid for at competitive rates All work for consideration should be sent to the Editor at our Golden Square address

Britain's Best Magazine For The Sinclair User

ZX COMPUTING

Don't be disappointed — make sure you get every issue of *ZX Computing!*

Just £12 70 will ensure that the next six issues will be lovingly wrapped and posted to you. Just fill in the form below, cut it out and send it with your cheque or postal order (made payable to ASP Ltd) to:

ZX Computing Subscriptions,
Infonet Ltd,
Times House,
179 The Marlowes,
Hemel Hempstead,
Herts HP1 1BB,

Alternatively you can pay with your Access or Barclaycard simply fill in your card number, sign the form and send it off. Do NOT send your card!

Make the most of your ZX Computer with *ZX Computing* — bi-monthly!

Cut out and SEND TO

ZX COMPUTING

ZX Computing Subscriptions,
Infonet Ltd,
Times House,
179 The Marlowes,
Hemel Hempstead,
Herts HP1 1BB,

SUBSCRIPTION RATES (tick ☐ as appropriate)

- £12.70 for six issues UK ☐
- £14.20 for six issues overseas surface mail ☐
- £28 00 for six issues overseas airmail ☐

Subscription Order Form

Please commence my subscription to ZX Computing with the very next issue

I am enclosing my (delete as necessary) cheque/Postal Order/International Money Order for £
(made payable to ASP Ltd)
OR
Debit my Access/Barclaycard (*delete as necessary)*

We welcome Access

VISA

☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Please use BLOCK CAPITALS and include post codes

NAME (Mr/Mrs/Miss)

ADDRESS

POSTCODE

Signature

Date

A NEW, IMPROVED ZX81 KEYBOARD AT THE SAME OLD PRICE. £9.95.

There's only one thing wrong with the ZX81. Its keyboard.

Or rather its lack of one.

Since it's flat your fingers don't feel as if there's any response to the pressure put on the keys.

In other words, you're not quite sure which keys you've pressed until the screen actually tells you.

Our new, improved push button keyboard changes all that.

It matches the ZX81 perfectly. And the keys give a real calculator-type feel.

To set it up all you have to do is peel off the adhesive backing and stick it on top of the ZX81 touchpad.

Because no tampering or soldering is involved the guarantee is not affected. And it will last for up to 3½ million operations.

But our keyboard doesn't just come loaded with features. With it comes a separate overlay and a set of coloured stick-on labels to make game playing easier.

It's yours for the original price of £9.95.

Whichever way you look at it, we think you'll agree that it's a keyboard that's quite outstanding.

Orders to Filesixty Ltd., FREEPOST, London W9 2BR
Cheques/PO made payable to Filesixty Ltd
Please send me_____(qty) Keyboards at £9.95 each (including VAT and P&P)

Total £

Name *BLOCK CAPITALS

Address

FILESIXTY

Filesixty Ltd., 25 Chippenham Mews, London W9 2AN, England. Tel: 01 289 3059. Telex: 268 048 EXTLDN G 4087

Welcome

```
10   BEEP alarm, clock
20   PRINT"Time to get up!"
30   GO SUB bathroom
40   LET action = dress
50   GO TO kitchen
60   INPUT breakfast
70   GO TO work
80   LET action = work
90   IF time<1200 THEN GO TO 80
95   GO SUB wine bar
100  INPUT food + drink
110  IF cash>0 THEN LET drink = drink + 1  LET
     cash = cash - 1  GO TO 110
120  RETURN
130  IF drink>4 THEN GO SUB bathroom  LET
     drink = drink - 1  IF drink  6 THEN CRASH
135  IF drink < 3 THEN LET action = work
140  IF time<1700 THEN GO TO 130
150  PRINT"Hello dear"
160  INPUT supper
170  LET action = TV
180  IF time<2300 THEN GO TO 170
190  GO SUB bathroom
200  GO TO bed
210  PRINT "I've a headache"
220  LET action = sleep
```

Isn't it amazing how computing seems to take over your whole life!

I decided to go to the local to get away from computing for a while. If I wasn't working on my machine then one or other of the family usually was (including the cat who claims new peripheral cartons for his own). I needed a break.

On entering the Merry Micro I noticed a new device in the corner, a video juke box. Fascinating. Also expensive and chip controlled much discussion ending back on micros. Try again.

A quick play on the fruit machine accompanied by the sound of zips and zaps from the latest arcade wonder sitting in the other corner. More chip control, more money, more talk back to subject of micros.

Reset.

Join a group of friends from the local school, they are discussing control devices, word pros and educational software. Leave group. Move to join a bunch of local sportspeople, it's been a long time since I talked about football, cricket, horse racing and other non computer related activities.

It took less than a micro second before the conversation got round to horse and football forecasting programs and computer cricket simulations.

Give up, go for a long walk, go home. Its hard to believe that only 10% of the population are computer orientated, everywhere you look the subject is raised. Perhaps the space invaders were harmless, its the micro that seems to have taken over. Don't get me wrong, I still love the whole subject, but you can get too much of a good thing sometimes.

Back to school

Recently I was privileged to attend a teachers course in Exeter which had been organised by the Council for Educational Technology, the Microelectronics Education Programme and Avon Special Education Microelectronics Resource Centre. Both the organisers and the members of the course were convinced of the value of using computers to assist with teaching. Each of us worked from 9.00am to 9.00pm attending demonstrations and lectures and then continued far into the early hours trying out what had been learnt.

The outstanding feature of the course was the system that had been devised to allow teachers to communicate their needs to programmers, a system of specifying their requirements.

I am a product of the home computer boom and have no formal training at all. My particular likes happen to be machine efficient programs — much along the lines of the techniques used in the 1K Corral — and every time I saw or heard of "Structured programming I tended to run a mile. However, trapped in the course, I had to follow this very subject. BUT now that I've experienced it first hand, seen how tremendously versatile it is and how easy it makes actual programming, I must admit to being completely impressed! Don't worry, I am not going to fill *ZX Computing* with educational programs or insist that all submissions are structured, but I do recommend that you take a look at this method, either by reading a book or preferably by attending a course of some kind (night school?), and decide for yourself.

Finally, I wish to thank all participants for the very friendly and warm atmosphere they generated.

Our education system is in good hands.

Contributions

We are always on the lookout for good programs and articles for future issues of *ZX Computing*, and where better to look than to our own readers. If when reading through the magazine you think you can write programs as well or better than our present contributors, then let's hear from you.

All contributions are, of course, paid for at very competitive rates. So if you've got your eye on a new ZX add-on or you'd just like to supplement your pocket money, get writing! It is vital, though, that all the programs you send us are totally original, and not 'borrowed' or 'adapted' from other magazines or books. (When Tim Hartnell was sitting in the Editor's chair he even received original contributions he himself had written for his own books!)

Any kind of program (business, domestic, educational, or just fun) will be welcomed which use ZX BASIC in clever and efficient ways, or those which employ certain routines which can be re used on other programs.

Program listings are vital, along with a clear explanation of how the program is constructed, what it does and what the user can expect to see once the program is RUN (a screen dump is particulary valuable in this respect). When submitting Spectrum programs, it is very important to remember to enclose a cassette of the program as well as the listing, as this will allow us to check the program before publication.

Fulfilling obligations

Dear *ZX Computing*,

It is with interest that I read a number of letters complaining about mistakes in listings published in *ZX Computing*. It is very gratifying to see that you intend to do your best to rectify this situation by using a different printer to LLIST. Of course you will get complaints that the graphics in the listings are confusing as they appear as letters but by including a key at the start of the program showing the way that graphics will appear, I would have thought that this would have satisfied even the most particular of your readers. Having said this, and acknowledging that the Sinclair print outs are not that good one is curious to know how, if *ZX Computing* get tapes and listings of programs, programs are still published which fail to run correctly. Whilst it's a real test of one's skill to locate and cure bugs in a program which one has laboriously keyed in, it's pretty annoying to find out that whole lines have been left out. Surely someone tries these listings to make sure they work before they are published? Your readers should be able to key in the programs you publish and providing they haven't made any errors, run your programs successfully. That is a reasonable expectation.

There are a number of publications which seem to ignore that they have legal obligation to fulfil. I know that mistakes happen, and I note that you are pretty good at *ZX Computing* about publishing error corrections as are a number of other magazines. There are a number of paperbacks on the market that do not. The publishers of these books should be a little more careful. The odd addage "caveat emptor" doesn't really hold much water in these days of Trades Description

The question "What use is the IN function on the Issue III Spectrum?" needs answering by you and Sinclair Nuclear Attack (Dec/Jan 84) issue, is a typical example of how the IN command is now useless. On issue III machines the sights froze, missiles auto-fire, missile explosions didn't dissappear, bomber planes refused to fly across the screen. I tried the 191 substitution, as suggested only marginal improvement. I then read Dilwyn Jones' fine book 'Delving Deeper into Your ZX Spectrum'. I adapted a program from that book somewhat laboriously perhaps, but with interesting results. The program scans the 8 sections of the Spectrum Keyboard and counts the number of times 191 is found at the I/O ports associated with these sections. The scans are carried out periodically and after 100 scans, summarizes the results of 100 scans for each section. Stupid program you might think, without pressing keys, no change should be observed. Not so, print outs from this program showed that when the Spectrum heated up to normal operation temperatures, readouts based on 191 and 255 were observed. The incidence of erroneous readings being as great as 70-80% for some keyboard sections. When cold, the keyboard gave 191 readings consistently. It would seem that the ULA is unstable in it's effects. I wonder if Sinclair found this out after issuing the new model and have tried ever since to recover their position. In my eyes they have lost a certain credibility over this. I also believe that they may have tried to divert public attention from something which is their responsibility and which definitely has affected operation of the Spectrum. The IN function in it's original form provided an elegant solution to cursor control and provided a fine enabling mechanism. If the results of the program which I have sent you are correct, then it clearly confirms that the IN function is useless certainly on my Spectrum and others which I have been able to test that were Issue III.

It would be interesting for your readers to discover if their Spectrums also exhibit this problem. It will also provide a good method of demonstrating whether or not they have an Issue III.

The Spectrum is an excellent little machine for the money — unbeatable value. A lot of people have bought them. They deserve to know about how alterations are going to affect their machine's operation as soon as possible after that alteration has been made. Sinclair have been consistently evasive about this if the reports one reads are anything to go by. It would seem that Sinclair have had to be *cajoled* into revealing what they have to date only by persistent enquiries by the public and the user magazines (well some of them). By their own admision it is SEVERAL months since the ULA was changed. Still Sinclair have not really given the public a clear statement of how the ULA affects the operation of the Spectrum and, more important, if there is a way to deal with the problem. IN is there for a reason — if it's no use then that is not what buyers of the Spectrum could reasonably expect from the handbook that Sinclair issue with their machines.

Best regards

Dane Lavery

PS. For those of us who missed certain issues of your magazine, why don't you publish the program errors wich you have become aware of in a summary form for the 8 issues updating by one month for every new issue. It wouldn't take up much room. It would save your readers a lot of effort flicking through their back issues and it would serve to highlight your own success in eliminating errors!

```
IN 65278=191   #IN 32766>191=7
IN 65022=191   #IN 49150>191=88
IN 64510=255   #IN 57342>191=5
IN 63486=191   #IN 61438>191=10
IN 61436=191   #IN 63486>191=6
IN 57342=191   #IN 64510>191=69
IN 49150=255   #IN 65022>191=3
IN 32766=191   #IN 65278>191=3

No of Checks=100
```

The first trial — see Fulfilling Obligations

```
IN 65278=191
IN 65022=191
IN 64510=191
IN 63486=191
IN 61438=191
IN 57342=191
IN 49150=191
IN 32766=191

No of Checks=100
```

The second trial — see Fulfilling Obligations

```
   0 REM "DETECT" Dane Lavery
1983
  10 LET x=0: LET y=0: LET z=0:
LET p=0: LET q=0: LET r=0: LET s
=0: LET t=0: LET d=0: LET g=0
  95 FOR n=0 TO 7
 110 LET A=65534-(256*2^n)
 115 LET B=IN A
 125 GO SUB 2000
 140 IF B 191 THEN  GO TO 142
 141 IF B =191 THEN  GO TO 145
 142 GO SUB 1000
 145 IF n=7 THEN  GO TO 4000
 146 IF A=32766 THEN  GO SUB 200
0
 150 PAUSE 5: NEXT n: GO TO 95
1000 IF A=65278 THEN  GO TO 1100
1001 IF A=65022 THEN  GO TO 1090
1002 IF A=64510 THEN  GO TO 1080
1003 IF A=63486 THEN  GO TO 1070
1010 IF A=61438 THEN  GO TO 1060
1011 IF A=57342 THEN  GO TO 1050
1012 IF A=49150 THEN  GO TO 1040
1020 IF A=32766 THEN  GO TO 1030
1030 LET x=x+1: PRINT AT 2,14;"£
IN 32766>191=";x: RETURN
1040 LET y=y+1: PRINT AT 4,14;"£
IN 49150>191=";y: RETURN
1050 LET z=z+1: PRINT AT 6,14;"£
IN 57342>191=";z: RETURN
1060 LET p=p+1: PRINT AT 8,14;"£
IN 61438>191=";p: RETURN
1070 LET q=q+1: PRINT AT 10,14;"
£IN 63486>191=";q: RETURN
1080 LET r=r+1: PRINT AT 12,14;"
£IN 64510>191=";r: RETURN
1090 LET s=s+1: PRINT AT 14,14;"
£IN 65022>191=";s: RETURN
1100 LET t=t+1: PRINT AT 16,14;"
£IN 65278>191=";t: RETURN
2000 FOR m=0 TO 17
```

```
2010 PRINT AT m,0;"
"
2015  NEXT m
2020 RETURN
3000 LET g=g+2
3020 PRINT AT g,0;"IN ";A;"=";B
3030 IF g=16 THEN  LET g=0
3040 RETURN
4000 LET d=d+1
4005 IF d=101 THEN  COPY : GO TO
 6000
4006 PRINT AT 19,0;"No of Checks
=";d
4010 GO TO 146
6000 CLS : INK 1: PAPER 7: BRISH
T 1: FLASH 1: PRINT AT 10,0;"Do
you wish to run check again?"
6010 INK 2: PRINT AT 12,12;"(y o
r n?)"
6020 INPUT a$: INK 0: PAPER 7: B
RIGHT 0: FLASH 0: CLS
6030 IF a$="y" THEN  GO TO 10
6040 IF a$="n" THEN  CLEAR : PRI
NT AT 12,11;"Bye!": PAUSE 50: CL
EAR : NEW
```

Keyboard familiarity

Dear *ZX Computing*,
The biggest problem for many young children when first attempting to write or enter listings is lack of knowledge of the position of characters on the keyboard. To assist in "learning by play" I wrote the simple drawing shown below.

```
10 LET L=0
20 LET C=0
30 INPUT A$
40 LET L=L+( 21) * (IN
KEYS= "6") -
(L  0) * (INKEYS="7")
50 LET C=C+(C 31) * (IN-
KEYS="8") -
(C  0) * (INKEYS="5")
60 If INKEY$ = "9" THEN
PRINT " * "
70 IF INKEY$ = "0" THEN
GOTO 30
80 GOTO 40
```

On RUNing the program stops first at line 30. At this point any key(s) may be pressed. The character(s) will then be used for drawing using normal cursor (5689) control (who needs LOGO?!). Pressing key 9 will cause the present position to flash and pressing key 0 will return control to line 30 to enable the plotting character to be changed. Simple, but good fun, and it enables the beginner to cover the display in any of the characters.
A J Harper
7 Ball Close
Hitchin
Herts

Across the pond

Dear *ZX Computing*,
First let me say that since finding my first copy of *ZX Computing* on the bookshelf of one of our booksellers here in the 'colonies', I have become an avid reader. I used to read the U.S. publications SYNC and SQ Quarterly, but both have gone by the wayside, what with TIMEX (Sinclair getting out of the marketing of the Sinclair line over here. So now it's back to the 'mother country' to keep life in the old ZX. Is there any way to go about obtaining back issues of *ZX Computing*? I would like to obtain Numbers 1 through 9 of volume 1 to complete my set.

I have had my 16K ZX81 w/Suntronics keyboard and Sanyo tape recorder in almost constant operation since 1981, and have only experienced an occasional RAMPACK 'crash' when my wrapping tape anti-wobble loses it's stickum. The ZX plays games, handles the family budget and financial accounts, and even occassionally runs communications system simulations when the big main frame at work can't get to it.

Second, and my main reason for writing, I just got around to LOADing "MATHS MAZE" by Nick Broom (*ZX Computing* Dec/Jan 84), and ran into a couple of bugs. The first bug was a 5/3050 halt (Display full! — Enter CONT to proceed). I solved that one with

```
3045 CLS
```

The second bug was a 3000 to 3060 loop caused by not negotiating the maze while going around after the math signs. I decided the GOSUB 3000 wasn't bad, just the lopping, so I modified the program as follows

```
3046IF PEEK — 1490
     THEN GOTO 2000

     Graphics
2000REM * * * LEFT
     THE TRAIL * * *
2010PRINT ,,,,"YOU LEFT
     THE TRAIL. YOU
     HAVE"," BEEN
     PENALIZED ONE
     POINT "
2020LET
     SCORE=SCORE-1
2030FOR X=1 TO 10
2040NEXT X
2050GOSUB 6800
2060GOSUB 1000
2070RETURN
```

Now it runs like a champ, and forces one to be a little more careful in the maze if one wants higher scores.

I am now awaiting delivery of a TIMEX Sinclair 2068 computer (the U.S. Spectrum), a TIMEX 2040 printer (the U.S. ZX printer) and a TIMEX 2020 recorder, which I ordered from TIMEX when they announced their closeout sale. I have introduced two of my co-workers to your magazine (they both have 2068s) and one has been LOADing 'DEPTH CHARGE' from the Feb/Mar 84 issue (no indication as to problems or bugs as yet).

Thanks for a great magazine. Keep on sending it 'across the pond'!
Sincerely yours
Bob Leuyck
USA

A little SAGA

Dear Sir,
As a possible candidate for a Royal Yachting Association Certificate I was very interested in the navigational programme by Mr. Eric Hutchinson listed in the Apr/May edition of *ZX Computing*. However, I have a problem!! I own a 16K ZX81 and have fed the program into it four times (20 hours' work!!) and I am unable to Run the program. All I get on the screen is an inverted L between ''''s. I am a recent newcomer to computing and perhaps I am making an error. However where an O is used I am inserting O at lines 101,104,155,195,210,693, 694,767,920,925,935, 1009,1019.

I assumed that the program would have to be RUN before any entries are made into it as with other similar programmes. Any advice will be much appreciated.
Yours truly,
A Russell Hey

This letter was followed by ...

Dear Sir,
With reference to my letter dated 11th April regarding my difficulty in loading the navigational programme by Mr. Eric Hutchinson in the current edition of *ZX Computing*.

I have been successful with this problem by 'loading' the printed programme from a tape into the ZX81 and there by getting the 00 on the screen. Instead of pressing 'Run' and 'Newline' which resulted in failure! I pressed GOTO 4016 and then 'Newline' and the instructions were displayed on the screen. This must show you that I am a newcomer to computing but thought it may help any other newcomers, should there be any nowadays!!
Yours truly,
A Russell Hey

Taken to task

And now for a big 'un

Dear *ZX Computing*,
I was very disappointed in the example program taken from Mclean and Gordon's book of Spectrum programs ("Taken to Book" April/May). Apart form the high quality of the listing print, (my compliments to the editor!!), the diary program is riddled with errors and inefficiencies. Although a full review of the book was made by Patrick Cain, I would like to comment on this particular program by posing the following questions:

1 Why is the 'Diary' displayed at the beginning for 2 seconds, and then wiped from the screen before the information is given? Could it not be displayed at the top of the screen with the information below it? I think the author of this program must be a CLS fanatic!

2. If option 4 is entered (line 130) by mistake, the screen is cleared, "Wrong response Press any key" is displayed, and you are very lucky if you see it! This is because — guess what? — the screen is immediately cleared and the program halts. Do you think:

PAUSE 0 : CLS GO TO 110

or something similar is missing from line 140?

3. After reviewing or writing a page the program returns to the place from whence it came and stops. Why? If it returned to the original menu of choices, more than one page could be reviewed or written. In this case, there would be the small problem when writing another page using a non-initialised array, d$. This will not all be overwritten if any text lines are short. So line 200 could be a subroutine for filling the array with spaces before jumping back to line 110.

4. Why should anyone want to run the program to choose option 3 and stop? Amending it not to stop after the completion of each process gives the selection of this option more meaning.

9. Why, after the selection of option 1, does the program clear a screen which is already blank? Sorry — my mistake — it doesn't since the subroutine starts at line 430. This leads me to ask:

9. What is line 420 doing there?

7. Is PRINT d$ invalid? (line 490?) The only way I can display the array d$, which is 2-dimensional, is by using d$(n) and separating it for values of n from 1 to 21.

9. Why, after clearing the screen (line 150) and testing the options, is it necessary for option 2 to pause again and clear the screen again? It seems to me that line 220 is unnecessary since the program pauses at line 230 to await the date.

9. What will happen if a date is longer than 10 characters when entered (eg. 17 September 1984)? I'm sure we know — an error when saving. The array will still exist when the program has stopped, but how many other users will know what was wrong, and how to save it correctly? This circumstance should have been allowed for, by way of a warning at INPUT time, perhaps, together with a test to ensure that the date is not too long.

10. Is line 140 (yet another CLS) necessary since the screen is still clear and the input line has disappeared?

11. When the diary page is typed in there is not a neat routine for entering each line, allowing for the ENTER key (code 13), after the key pressed to start the process has been checked for it's release. The facility for deleting a character is also provided (code 12), but that character is not deleted from the array, only overwritten when another one is typed in that position. Even the screen deletion does not work when it needs to be made on the previous line, so is this program really a simple word processor? Deletions on previous lines can be made to work if both i and j are altered and tested for less than 1.

12. Why on earth has the screen not been cleared when the tape recorder has been set up correctly, so that the saving and verification messages do not appear in with the diary page?

13. Is mention made in the book accompanying explanation of what to do if there is a verification error? All that is needed is for the user to SAVE and VERIFY again. But the naive user will try and RUN the program again, no doubt, and will then have to re-type the whole page.

14. Does this program have any of the basic requirements needed in a wordprocessor? In the editor's own words: "A wordprocessor ... displays text on the screen. This can then be altered, modified, adjusted, corrected, added to, or removed." The only facility which this program can perform correctly is backspacing on the screen, clearing each character as it does so. However, the next text must then be typed over the cleared screen positions to alter the text in the array, and then this procedure only works on one line of text. Not really a wordprocessor, I think.

15. My overall impression is that this program was written very quickly and not very well tested. Is this the standard of programming which home computers users must expect? This sort of inefficiency is giving programming a bad name, and is occurring all too frequently, not only in books, but in purchased software too!

16. What can you do if a program like this, from a book or magazine, does not function as it should? Try contacting me (a professional programmer!) at BUG6EAR, my microcomputer advice service — all micros considered, no problem too small. Ring Kenilworth (0926) 55376 after 4pm weekdays for an initial chat.

Yours faithfully,
Frances Daniel

Corrections for August/September

The August/September issue of *ZX Computing* contained two fairly minor faults. Some may say that they were very serious! But it's all relative y'know. Anyway, the first fault was with the program 'Day of the Week' from 1K Corral. The accompanying text to this program referred to a 'figure 2'. This figure was, as readers have pointed out, omitted. To recap, readers were invited to type in the variables shown in the elusive figure. So, to put the record straight, figure 2 is displayed in all its glory, somewhere about this page.

The second problem occurred with part 2 of David Nowotnik's 'Slogo' series. If you cast your mind back, the article contained several examples of Slogo in use. Now whereas in the text David refers to 'square brackets', the illustration showed common-or-garden *curved* brackets. This was not David's fault, but came about through mis-interpretation by our typesetters. However, to put the record straight again, every reference to a bracket in LOGO should be to square brackets and not curved brackets. To avoid further confusion, we emphasise that square brackets must be used in LOGO programs, but not necessarily in the BASIC program used to implement LOGO on your Spectrum. Is that clear? No? If it isn't clear refer to this issue's instalment of Slogo which shows the correct brackets used in the correct context. *Phew!*

FIGURE 2

```
LET JAN=0          DIM D$(7,6)
LET FEB=3          LET D$(1)="  SUN"
LET MAR=3          LET D$(2)="  MON"
LET APR=0          LET D$(3)="  TUES"

LET MAY=1          LET D$(4)=" WEDNES"
LET JUN=4          LET D$(5)="  THURS"
LET JUL=6          LET D$(6)="  FRI"
LET AUG=2          LET D$(7)="  SATUR"
LET SEP=5          (Note spaces are shown by a dot)
LET OCT=0          LET E$="DAY"
LET NOV=3
LET DEC=5
```

The missing figure 2 from Day of the week — see corrections

Long sort

Dear *ZX Computing*,

I bought my first computer, a 48K Spectrum in April, mainly for storing data connected with my (other) hobby. I was therefore very pleased to find Nigel Salt's program 'DATAFILE' in Apr/May *ZX Computing*.

Having gained some knowledge of the keyboard, I eagerly typed in the program, followed by the first part of my data store (600 records, each of 15 characters over two fields). I then came to sort the file. HORROR! It took over 2 hours! Long then it took to type in the file in the first place.

Can anyone help? Can you publish a revised sub-routine, possibly in something I'm told is called 'machine code', which a novice like me can substitute for the SORT routine in Nigel Salt's otherwise excellent program.

Yours hopefully,
N.A. Shackleford

Can anyone offer any help?

Notting Dale Hi-Res

Dear *ZX Computing*,

Since May of this year I have been in proud posession of a Notting Dale Technology G007 Hi-Res pack for the ZX81 (16K). I have written a Duckshoot program for the pack using some of Tim Hartnell's graphics from your June/July 1983 issue. I would like to submit it to you for publication in case there are any other G007 owners out there in Microland.

If you could publish this letter with my address then any G007 users might like to get in touch with me for a postal interchange of ideas, techniques, programs etc.

Yours faithfully,
J.D. Almond
12 Wear Drive,
Springfield,
Chelmsford,
ESSEX CM1 5PT

Sorry, but we cannot use the program. However we published your name and address as requested.

AGF PROTOCOL 4

GAME CONTROL CUSTOMISING for the ZX Spectrum

FEATURES

- Compatible with ALL Spectrum software.
- Hardware programmed by unique 'Custom Card' – simply snap into place!
- Direct addressing ensures optimum response time.
- Pre-programmed cards for AGF/Protek, Kempston and ZX Interface 2 protocol.
- Side entry joystick port eliminates flying leads.
- Low power four i.c. design.
- Recessed Computer Reset button for clearing machine code programs.
- Rear expansion port.
- Uses no memory or back up software.
- Up to five individually programmed Protocol 4's per Spectrum for multiple control applications.

Protocol 4 is a completely self-contained joystick interface. It takes all sticks, including Quickshot II with 'rapid fire', or trackballs, and allows them to work with all games.

Because it is fully programmable you can customise game control to your own requirements i.e. put the 'pause–game' facility onto an unused direction of the joystick for real armchair control. Likewise you can disable any joystick functions that you find annoying or problematical.

The Protocol four utilizes hardware programmed technology to achieve replication of any key on the keyboard.

This is implemented by a unique system of 'Custom Cards'. They simply clip in immediately configuring the interface to replicate any keys.

No tapes to load or contortioned joystick movements are required to set it up, all programming is retained by the cards.

To make the Protocol 4 even easier to use it will come supplied with 4 preprogrammed 'Custom Cards' that will make it work like AGF/Protek, Kempston or Sinclair ZX Interface 2 adaptors.

All 'Custom Cards' can be infinitely re programmed, if desired, or extra packs can be purchased to enable a whole dedicated control library to be set up.

Diagonal movement is automatically available once the four normal directions are set.

		TOTAL
'PROTOCOL 4'+5cards	30.95	
Extra Pack(s) of 5 cards	3.95	
QuickShot II Joystick	10.95	
	FINAL TOTAL	

VISA

OVERSEAS PRICES ON APPLICATION
DEALER ENQUIRIES WELCOME

news

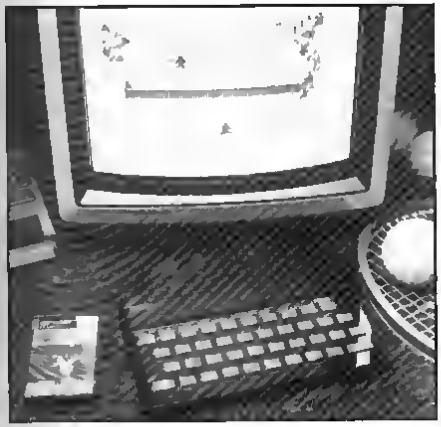

Anyone for tennis?

I m sure we are all pleased to see Psion s new Spectrum program Match Point released on the Sinclair label Hands up all those who were beginning to feel abandoned in favour of the QL?

I once owned and enjoyed a similar game on the Atari VCS game centre but this version is far more sophisticated

As in any computerised ver sion of a real activity, be it physical or mechanical, it is un fair to compare it to the real thing however I would venture to say that Psion have got as close as is possible By making the position of the player deter mine the type of shot played, a fair amount of subtlety and con trol has been achieved using on ly five keys or a joystick

At £7 95 Psion have once again proved that it's worth waiting for their products

Sinclair Research continues to expand

The ZX Spectrum continues to be the most popular home micro in Britain, according to market research organisation Audits of Great Britain A recent A G B survey shows that Sinclair Research continue to lead the field, with Commodore and Acorn in second and third places respectively

Sensibly Sinclair are not resting on their laurels but are spreading their wings in many directions S inclair Research has created a separate European marketing unit and by the time this has gone to press should have offices in Paris and Frankfurt, which will be respon sible for a major sales drive An estimated half a million Euro pean sales are expectd this year and this should double in 1985 when full scale production of the QL gets underway

Sinclair have recognised the need for programs which are written in the native language of the country and they believe this to be crucial for their continuing success This should please our European readers as we've had several very professional looking submissions from them

Presently exports to the continent are critically low When I visited some European cities a short while ago the lack of both computer hardware and software was striking when compared to the proliferation to be seen in our stores

At home...

Meanwhile, another distributor joins the existing team which in cludes Prism and Websters London based distribution firm Lightning have a non exclusive agreement to handle UK wholesale distribution of Sinclair Research's own brand soft ware

Lightning currently supplies independant computer dealers book shops and record video radio and electrical outlets of fering a 24 hour delivery ser vice

Events

I'm pleased to say that some organisers of computer events are now giving us enough notice to enable us to pass the information on to you

MYCOMP — 1st Nov. onwards
Fulcrum Centre, Slough

This new show has been specifically designed to attract all those who want to buy a computer but are unsure of which one suits their needs,

Over 10 000 prospective home, business and educational users are expected to attend and lectures and discussions will be held daily and a special 'hands on experience' area is to be set up.

PRESTATYN HIGH SCHOOL
2nd COMPUTER FAIR
Sat. 29 Sept. Prestatyn
10.00am -5.00pm

Local shops, suppliers and clubs will be along with samples and demonstrations, and local technology based industries, the armed Forces, IT and MEP will be there

HOTECH - 3/4 Oct.
Royal Garden Hotel, London

Exhibition and conference devoted to computers in the hotel industry

PERSONAL COMPUTER WORLD SHOW
19/24 Sept.
Olympia 2, London.

Wednesday 19th is Tradesmen and Press day, the show is open to the general public from the 20th,

One of the giants of the computer shows last year over 46 000 people attended and this forced the venue to be relocated to this site

Video and chips

A new six part series starts on ITV on Thurs 9th Aug Made by HTV the series has a wide ranging set of topics and is aimed at youngsters of 6 +

Director Alex Kirby intends to be "a fast moving, up to the minute show with the accent on fun ,

In Brief

● Martech seem to be calling themselves Software Communications Ltd these days and heve produced "The Odyssey of Hope" for the 48K Spectrum. This is an adventure game featuring what they claim ere instant hi-res graphics et each location.

Jump Challenge should also be around now, and this is described as a highly realistic game where you jump your motor cycle over obstacles. None other than Eddie Kidd himself will be helping to promote this game.

● Griffin Software have four recent additions to their educational programs of the 48K Spectrum, all ere for mathe

Mental Arithmetic for age 8 +, Fundemental Algebra 10 to 18, The Theorem of Pythagoras 10 to 14 end Introduction to Trigonometry 12 to 16.

● Cheetahsoft, whose first two programs seem to be selling well, heve signed an exclusie deal with Imagic of the USA to market their range of Spectrum software in the UK. The first two titles are Moon Sweeper and Dragon Fire end cost £7.95 each.

● Football Manager from Addictive games have been improved by the addition of some hi res graphics. The company tell me that sales of this grandaddy of games are still as high as they deserve to be.

Versions ere evellable for the ZX81 (no graphics), BBC and the 48K Spectrum at £5.95, £7.95 and £6.95 respectively.

● Mastertronic, the company who proved that selling games for £1.99 was not only viable but profitable, have formed a joint company with Galactic Software to secure their supply and to expend beyond games.

We look forward with interest to the next batch of programs.

✱ One of the most valuable prizes yet to be offered for the solution of e computer game (or puzzle as Haresoft insist it is called) is the famous Kit Williams' Masquerade Jewelled Hare. Players (Puzzlers?) will heve to solve the clues in two programs, Hareraiser Prelude and Hareraiser Final, in order to win the hare, or cash prize of £30,000. Each game costs £8.95.

Haresoft is at PO Box 285, London NW1 7JD.

Finally at the time of going to press, "River Rescue" — one of their previous releases — makes its debut on the new label. This was reviewed by Clive Smith in the APR/MAY issue and his final words were ' definitely worth a trip to your local stockist to get yourself a copy '.

All the Creative Sparks programs sell for £6.95.

CCS strategy

Cases Computer Simulations have been producing strategy end simulation games since the early days of the ZX81. Three programs have been added to their range recently, two of which are part of e new series of pocket money games.

' United ' is the latest in their full price range and is similar to Football Manager an addictive game which has been on the market for some time from — would you believe it — Addictive Games. However CCS say that the problems are quite different.

I have tried both games and I can see there are differences. However, with my lack of knowledge of the subtleties of football and the management thereof they didn't seem to be too diverse. The aim of the player is to take his team from the fourth to the first division and eventually the league championship. As manager, the player of United picks his team, trains them, buys en sells players, and scouts to find out the tactics of the opposition teams.

There is a graphical representation of the match, but this is disappointing. The pitch is displayed with circles and lines representing the position and path of the ball — not very inspiring.

The main strategy of the game seems sound and this part of the program can give pleasure for many an absorbing hour.

United costs £5.95.

A welcome development is the "Charlie Charlie Sugar" range of games. CCS are constently trying to develop new ideas and though some, like their ' Games for Girls ' series may not get critical acclaim, at least they're trying.

The first two, at £2.99 each, are "Whodunnit" and "Dix Mille". Whodunnit is an investigative game for up to four players which changes each time it is played. The object is to solve the brutal murder of Professor Carpenter. There are six suspects and from the facts given, and the answers to the question you ask, you try to deduce the culprit, weapons used, and the two valuable missing objects.

Similer to, but more complex than, a well known board game, Dix Mille kept my daughter occupied for hours. Dix Mille is a traditional French dice game similar to poke dice except that the scoring and combinations differ. Up to six people can play, with the option of the computer as one of the players. Scores are displayed and the game ends when all players have had the same number of turns and one or more has scored 10,000 points.

A bright spark

Thorn EMI has decided on their marketing strategy and created a series of programs for the VIC20, Commodore 64, Atari and Spectrum computers under the label "Creative Sparks". This has taken the publishing of computer software away from their video section and made it a part of their European publishing operation. The first two programs to make their debut under this label for the Spectrum were "Tower of Evil" and "Orc Attack", both for the 48K machine.

The graphics for both games are of a high quality and although rather simple in plot are decidedly addictive to play. Orc Attack has you defending your castle against increasingly numerous supernatural beings. This is done by throwing rocks at them until they reach the top and then hacking away at their heads with a sword. Should you survive long enough then a cauldron of oil comes to the boil and you can pour that on them and watch them all being destroyed by the flames. This then causes another more difficult wave of beings to attack.

Tower of Evil has you moving around rooms in the tower trying to find the key, treasure and goblet before moving onto the next level. There are over forty rooms to visit and fire its between each room. I'm afraid I couldn't get past the first fire pit! A challenging game.

Following these they release ' Money Manager ', a home budgeting program. It allows you to keep a record of all your income and expenditure and to help you plan your finances. There are seven different methods for cash analysis and interest calculation, but no matter which one I used I still ended up in the red.

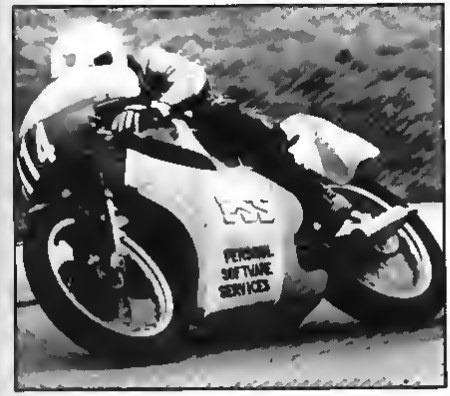

PSSt!

Coventry company PSS are very busy lately. Apart from having their premises broken into they took part in Radio 4's business competition to attempt to win the Enterprise Award. They were one of twelve finalists competing for the first prize of £10,000.

Sport also comes in for support from them in the form of sponsorship to Kevin Bowes, a 23 year old Coventry motor cyclist. He has done well recently and has qualified for the Marlboro Clubman's Championship at Silverstone on the 23/24 September. Finally, the classic ZX81 favourite, The Gauntlet, has been repackaged and reissued. The news is that high street store Menzies reports an excellent response.

The Gauntlet costs £4.95 for the 16K ZX81.

The latest Spectrum game from PSS is Les Flics and is based on a little pink cartoon character and a policeman made famous by the late Peter Sellars. This is another good attempt at an arcade adventure game with a nice sense of humour.

Now showing at your local software centre for £6.95.

Argus Press Software Expands

APS seemed quite surprised at the success of their "Fall of Rome" strategy game and a fair bit of credit goes to Peter Holmes, APS marketing manager.

At the Earls Court Computer fair he arranged for a squad of live Roman soldiers to add to the chaos. In fact old met new when a wandering Robot decided to join in, all that was lacking was a visit from Dr. Who.

APS appreciating the demand, have released three further strategy games.

INVASION is a simulation wargame where you have to exercise skill and judgement as

In Brief

● Voyager Software is a company which is new to me, and their first offering is Crazy Cranes for any Spectrum. The object is to unload ships as they pass by the pier. The problem? they don't stop and someone is shooting missiles at you!

Voyager is at Unit 31, Wirral Business Centre, Gorsey Lane, Dock Rd., Birkenhead, Merseyside.

● Terminal Software have their first arcade 48K Spectrum on the market, called Carpet Capers and priced at £5.95. They describe it as being a tactical fun-action game about deranged carpet fitters and say that it has nine screens of machine coda action. Sounds interesting.

● CRL have their long awaited and well publicised 48K Spectrum program "The War of the Worlds" on the market for £7.95. If you get stuck in this game then refer to the LP of the same name. I wonder if the game will promote the LP or vice versa!

● Some really top quality games have been produced since the last issue, one of which is "Worse Things Happen at Sea" — one of the most original games I've seen for a while! You become the captain of a very leaky cargo ship and you really have to work to succeed!

● Artic Computing Ltd. pledge to bring out at least one new game per fortnight until Christmas. Some of their recent releases in this batch are Mr. Wong's Loopy Laundry, a platform and ladders type game, Death Chess 5000, which will either play a normal game of chess or a hybrid chess/arcade game, and, my favourite, World Cup, a 3D perspective animated 1-9 player arcade type football game. Great.

All these programs cost £6.95.

● Brainbox Software, 20 Orange St. London WC2H 7ED have a brain twister of a program called Enigma on sale for £5.95. It's a real mind bender, the idea is to discover the rules — even the promise of five bottles of champagne failed to provided the stimulus for yours truly to succeed.

● Virgin continue to improve their output of 48K Spectrum games. Space Command is a 'shoot-em-up' game which provides plenty of action for space freaks.

The price is £5.95 from most stores.

● Great to see software from a new source. Ventamatic are sending their Spectrum range from Spain to the UK. The four games I have seen so far are Crazy Climber — a version of the arcade game where you climb up a building, The Builder — a simple but fun building block game, Martian Tunnels — a maze chase game, and Wreckage — a space zap game. The graphics are excellent and on the one I've seen, Crazy Climber — they really are going to make an impression on the market here. I only hope they get insert cards printed in English though, a lot of experimentation was needed before I could make any sense of the game!

● Computing is hell! Or at least playing Richard Shepherd's new game The Inferno is. This is a devious graphic adventure based on Dante's concept of hell as depicted in his book of the same name. At £6.50 it could easily be another classic for the adventure fraternity. Me? I'm still trying to get somewhere with the Hobbit!!

● Pop Quiz is a very impressive program of the quiz type. Stuart Henry, the well known DJ is promoting it and for every copy sold a donation will be made to the Multiple Schlerosis Society Research Fund.

Buy this program, have fun and help others, at £5.75 it can't be bad.

● From the USA comes good news for ZX81 owners. XOR is for the 16K ZX81 and makes use of hi-res (similar to Spectrum) graphics. A straightforward space invaders type game, it is probably the ultimate version.

Sold by J. Till at 96 Charles St. Stratford, Ontario, Canada N5A 5X7 it is a little highly priced at £9.95. I'll get Nick to check it out for the next issue.

In . . . . . Brief

● At last, the long awaited Scott Adams Spectrum Adventure, The Hulk, is with us. Nicely presented and from what I've managed to play, very devious. Adventure fans go get it.

● Melbourne House's Mugsy is worth a good look. Essentially a strategy/simulation game, the graphics put it into the realms of a classic Lucky 48K Spectrum owners!

● Longman Software presented what they describe as "Revolutionary software" for O level and CSE revision.

Maths, Physics, Chemistry and Computer Studies are the first five titles and each are presented via a database plus interactive programs.

Priced at £7.95 each, if they send us some for review I'll get Mike Edmunds to report on them.

● Fantasy have pensioned off Ziggy for the time being, and have introduced Beaky, one of the Andromedian Armed Condors — the rare goggled variety.

Yours task is to hatch out as many Beakys as possible by fighting off the Eggsnatchers. 12 screens are used in this fast arcade game — and it's not easy!

Look for it in your local software emporium. Priced at £6.50.

● A superb game from Micromega, Full Throttle does for computer motorcycle racing what Chequered Flag did for computer motor racing.

Many track options plus practice or race, excellent graphics and good, fast action. A must for all drive game fans.

● Widget have an excellent reputation for producing educational software, their two new programs are in the adventure game mould and are great for encouraging learning by experience.

Many people seem to think that education is about learning facts or practicing tables etc. In fact there is a great deal of learning done in an incidental way from programs such as these.

The two games on Adventure Playground are aimed at early readers up to 9 or 10 year olds and Castle of Dreams is designed for 11 to adults.

Not to be dismissed lightly and worth every penny of the selling price of £7.95.

● Star Trader is another excellent program combining the strategy of trading games with arcade elements. One of the most successful in a long line of attempts at this blend.

Available from local stores or from Bug Byte it cost £6.95.

● Compusound presents Block Buster (not to be confused with Blockbuster from Clever Clogs, they're totally different). This is based on the TV series of the same name and is a challenging quiz game.

An extra set of questions is provided and further sets are planned.

● Software Farm had a resounding and well deserved success with Forty Niner, a hi-res ZX81 game. They have now produced the follow up, also in hi-res (Spectrum graphics without any add ons!!), called Rocketman. At £5.95 it is probably a must for the ZX81 owner, I'll get Nick to give his considered opinion in the next issue.

Software Farm is at 155 Whiteladies Rd., Clifton, Bristol, BS8 2RG.

● Microsphere now has Omnicalc 2 available. This is a much extended version of the widely acclaimed original, and possessors of the first version may upgrade by returning their original and paying only £8.00. The full price is £14.95 and this is probably one of the best spreadsheet programs available for the 48K Spectrum.

Microsphere Computer Services Ltd., 72 Rosebery Rd., London N10 2LA.

● Vortex Software has produced a superb flight game called TLL. The name is not very eye catching and stands for Tornedo Low Level. The graphics are superb and you really must get a look at it at your local store.

you move, supply and build up your limited defences of the Western Alliance, just prior to an invasion by the Red's tank armies.

BISMARK is for all would be sailors to try their hand at intercepting and destroying the Bismark. It's not easy!

PLANETFALL is my favourite, I was involved in attempting to get this program (22K original) into a 16K ZX81 from the listing published in *Computing Today* when I took over *ZX Computing*. That project had to be shelved as a consequence but I did get an insight into the very complex logic behind it. Probably one of the most complex trading games I have seen, this program, set in the space age, will keep you occupied for hours.

All three programs are available at £6.99.

Also part of APS is the family firm Clever Clogs. Their range of educational software is gaining in stature and receiving more positive reviews all the time.

Our reviewers are not part of the APS/ASP organisation and no pressure is put on them to go easy on the companies' products. A reflection of their value is that Star Trucker and Blockbuster (beware of confusion with another program Block Buster) were in the Non Arcade top 10 chart recently.

There are now eight games in the Clever Cloggs series, Party Time and Shipshades for age 3+, Jungle Jumble and Sam Safty for age 5+, Whizz Quiz, Blockbuster and Music for age 7+ and Star Trucker for age 9+.

Most of these have a series of questions as part of the program and when these become too familiar then they can be changed. A welcome addition to the range is a series of supplementary question tapes featuring Science, The Arts and General Knowledge questions which can easily replace those built in to the program. Also a Clever Clogs club is run for fans of these games.

These programs cost £7.95 each.

Beginners' BASIC

Books on programming tend to be either very intellectual and hard to read or presented in a 'computing by numbers for idiots and two year olds' format.

The majority of people probably fall into a middle of these two extremes and there is very little to appeal to them.

Clive Pngmore has written Beginners' BASIC to fill this gap. He is the Principle of Orpington College of Further Education and was previously teaching as the head of Computing. His skill and experience shows in this book.

Clive's previous book was written for the NEC (National Extension College) and the BBC to accompany The Computer Programme and indeed '30 Hour BASIC' has become the standard text for many educational establishments. Using the comments and feedback from 30 hour BASIC Clive has refined his ideas and Beginners' BASIC is the result. It is published in the same type of binder but is approximately twice the size.

Although this book is written in 'multi micro' style with the usual lack of specific routines I would wholeheartedly recommend this to the average beginner because of the style and expense. Anyway it is better to get to grips with the essentials rather than bogged down in details — I remember when I first used a BBC I spent three weeks just playing with the sound and envelope commands.

The book introduces principles and techniques of programming by means of worked examples and exercises (answers are given !! and later examples show how the problems of designing programs can be tackled. The advantage of "Structured" programming is discussed but is not over stressed.

The book attempts to show how programming can be an enjoyable experimental activity. The reader is encouraged to write his/her own programs rather than buy pre-recorded ones, to find out about the language and become self-sufficient in @ASIC.

By the end of the book the beginner should have developed sound programming skills, should posses a repertoire of useful programs and will be given firm indications of how to continue to develop an interest in programming.

The price is £9.95.

NEC + YTV = "Me & My Micro"

Am I getting senile or do I remember being told repeatedly that the correct grammar was 'My micro & I'. Are standards slipping or am I being fussy?

Anyway this book from the National Extension College is £2.95 for 115 pages. The text is packed in and the programs are written in both Spectrum and BBC/Electron Basic.

Written by Paul Shreeve, the aim of the book is to show you how to write and develop properly structured and efficient, games programs. The professionals believe that you should never program to be machine efficient where this conflicts with structured programming, and yet this is often the only way to achieve satisfactory results when programming arcade games. However, it is to Paul's credit that he has chosen programs which do not require this compromise to be made and so achieves his aim. He uses games to demonstrate the use of loops, printing, movement, string handling and keyboard control.

The book can be used in conjunction with the Yorkshire TV series of the same name or used on it's own. With the number of books on the market covering programming from virtually all angles, it really boils down to looking at what is available and finding one which suits your reading preferences. I suggest it may be worth your while having a look at this one.

In . . . . . Brief

■ Bernard Babani who market a variety of small value for money books have added two more to their range, both by R. A. Penfold. "A Practical Introduction to Microprocessors" is intended for those who have some knowledge of general electronics but little or no understanding of microprocessors.

The book operates by constructing a simple circuit which the reader builds and experiments with. the cost is £1.95.

Micro Interfacing Circuits — Bk 1 " is for the amateur electronics enthusiast to build and use control devices for use with a micro.

Address decoding, analogue/digital converters and parallel/serial interfacing are all dealt with. The price is £2.25.

● Kingfisher Books have published "A Beginner's guide to the ZX Spectrum" written by R. & D. Graves, a father and son team, and priced at £2.50.

Described as a clear, well structured, straightforward guide based on overcoming problems experienced by them when learning, it should be worth looking at.

● Duckworth are publishing two books of interest to Adventure game fanatics, "The Adventurer's Companion" by M. & P. Gerrard is a complete guide to playing four of the most popular adventures: The Hobbit, Colossal Cave Adventureland and Pirate Adventure.

"The Adventurer's Notebook" is a must for all adventurers. The main part is a series of ready made maps with space for nouns, verbs, locations etc.

A chapter for beginners is included as well as a hints and tips section, and a list of recommended adventures is included. Both books sell at £3.95.

● Linda Hurley has added "Spectrum programming for young programmers" to her previous title " ZX81/TS1000 programming etc ."

Both published by McGraw-Hill they are worth looking at if you prefer your information presented in a step by step and very simple way.

In . . . . . Brief

● Robot control is interesting more and more people especially those in the field of education The main problem is the cost, but this too is coming down gradually.

Powertran Cybernetics, Andover, Hants produce four different fully programmable robots, the simplest is Henbot it a turtle type robot at £95 00, and the most expensive is Genesis P102 a complex robot arm at £1479.00.

● Kelwood Computer Cases Downs Row, Moorgate, Rotherham S60 2HD have come up with an interesting idea, why replace the whole of the Spectrum s case when all that is really needed is that the keys themselves are replaced?

K-Board simply replaces the keys and switches with a complete top of their own not just the rubber keys like some units This means that only the height of the actual keyboard is altered and so all add ons, interfaces etc are not effected This is certainly an alternative worth considering and as Kelwood can often be seen at Microfairs etc I'll let you know as soon as I can get a good look at one

K Board costs £29 50

● Challenge Research, 219 High St Potters Bar Herts EN6 5BJ have a cassette recorder specifically for the Spectrum At £65 95 it seems expensive, but it connects via the user port and it is claimed that all software, including commercial, loads four times as fast and with increased reliability

One has been despatched for review and I'll give more details as soon as I can

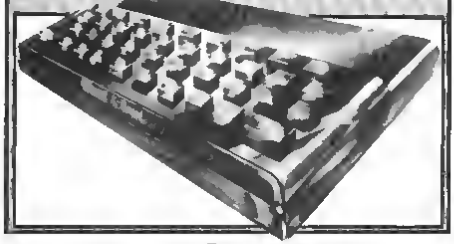

Four from Dk'tronics

Dk'tronics has always been a company which, as far as I know (I add that because as soon as I say something with confidence someone always write in to tell me of their horrendous experiences to the contrary), has always produced good, reliable wares

Four units have been produced recently by them and all look quite interesting Unfortunately although they sent a couple of items to us the GPO managed to mislay them, therefore I won't be able to give a "hands on" report as I like to do but will simply reiterate the information supplied by them

The keyboard

The first item is a Microdrive compatible keyboard Now I have used one of these for the last year and I have been very pleased with it There were a few minor problems of which I know two have been corrected

The lack of a proper space bar has been remedied and the delete and decimal point keys are provided in single keypress form A good ideas as I m always entering data as 1 m2 etc

The keyboard can be used with the Spectrum alone or with interface I attached and the Microdrive leads are fitted to a 16 way cable on the left of the case

The numeric keypad which was a feature of the earlier model is retained and Dk tronics tell me that the old problem of the key legends which were printed on stick on labels and which soon rubbed off has been eliminated by having the print on the underside of the label! — simple when you think of it!

Until I see a production model I can't say if they've done anything about the back of the case which sloped awkwardly on the old model hopefully they harkened to the criticism and modified this design fault

Regardless it looks to be a very good buy at £45 00, the same price as their old model and I may invest some of my ill gotten gains on one myself

The joystick interface

Into the crowded world of joystick interfaces is their offering This is fully programmable and they claim it will work with any software from any supplier

This seems to be achieved by mimicing the keyboard and it does not disable the keys while in use This is important as many programs need more than five keys to play them

Often I have commented on the lack of planning when add on producers make their units dead ended — ie you can't add anything onto the back of it — this one is supplied with a full through port so printer, speech interfaces etc can be used with it

The price is also very competitive £22 95

The Beep Amp

A new interface boost the aptly named beep so much that a volume control was deemed necessary, a boon to many parents no doubt

This is supplied with separate 4" speaker in a "pod" type box and 1m of cable

The cost of this is £14 95

The 3 channel sound synthesizer

This incorporates the Beep Amp but adds the capabilities of the usual AY 3-8912 sound chip I have used this chip in other units and it is capable of fantastic things

However the end results depend on the programmer's skill or the software provided and as yet I have no information as to what if any, support Dk'tronics will be providing in the way of programs

The same speaker in it's pod as for the beep amp is supplied with this unit

If sound and/or music is an interest of yours then this is a unit worth looking at

It will cost you £29 95

Super champ joystick

Dean Electronics Ltd. who import and market the impressive Alphacom 32 printer have entered the crowded joystick field

Again this is an American import which they tell me has been the top selling joystick in the USA for the last two years due to several features not usually found on the majority of joysticks Instead of having a trail of cable lurking around your computer, the Super Champ's ten feet of cable can be retracted into the base of the joystick when not being used



The handle is said to be specially contoured to provide maximum comfort for both left and right handed players

A feature which Dean Electronics describe as a 360 degree swivel base with suction cups for single handed control is mentioned, I'm sure this probably does something useful but I can't clarify as we have not yet received one for review

Finally it is claimed to be robustly built to withstand the severest of "physical abuse" — that's one test I'd enjoy putting it to when those aliens beat me yet again!

Available at £12 95 from most high street stores or from Dean Electronics Ltd. Glendale Pk, Fembank Rd, Ascot Berks (plus of course £1 00 p&p)

WIN £25,000 AND SAVE THE WORLD

Eureka!

250 K OF PURE MYSTERY BY IAN LIVINGSTONE

Spectrum 48K or Commodore 64 (Turbo load)

Full colour booklet packed with cryptic clues to help you unravel the mystery — and win the £25 000 reward

Music and sound effects built in

250K

5 PROGRAMS IN ONE

■ All 5 Adventures are linked ... can choose to play them separately And they all have REAL TIME built in So if you don't think fast you wind up as a pterodactyl's lunch, die of over-exertion in a Roman orgy or just lose your mind

■ "Eureka!" is not just an Epic — not just an Adventure At the start of each historical era you face an Arcade Action test to decide your strength level for the Adventure to come

■ The better your score, the stronger and faster you'll be

■ And it'll keep you on your toes with constantly-changing static and moving graphics Brilliant music and sound effects add to the excitement

■ As part of the "Eureka!" pack you receive a full colour illustrated booklet containing cryptic riddles and mysterious illustrations. Using booklet and screen together you steadily unravel the clues and build up a secret phone number piece by piece

■ If you're first to ring it you save the world and collect the $25,000!

■ Quite a package! And to give everyone a fair chance "Eureka!" will be released simultaneously worldwide on October 31st 1984 No packs will be available until that date All orders received by mail or phone by 26th OCTOBER will be despatched by post on the 31st right across the world. So order now, and be one of the first off the mark.

High quality full-colour static and moving graphics

Just clip the coupon Or, for even faster o... order by Credit Card on the "Eureka!" Telephone Hotline 01-460 6000.

Eureka!™

THEN THE RACE IS ON!!!



DEVISED BY IAN LIVINGSTONE

The storylines for "Eureka!" are by Ian Livingstone, whose Fighting Fantasy books have sold over 2 000 000 copies He's dreamed up some rather nasty tricks and twists for you in this Epic because he has also devised the cryptic clues and conundrums in the booklet that goes with the program He's the one who knows the answers.

"Eureka!" was programmed by Andromeda teams led by Hungarians Donat Kiss and András Császar It took the equivalent of 5 YEARS to create and the skills of 4 graphic artists 2 musicians and a professor of logic too We told them to stretch the hardware's capabilities and make sure you were kept awake for hours!! They've done it

£7 BONUS

When you order "EUREKA!" before 26 OCTOBER 1984 you ... Eureka an additional bonus £7 voucher off the price of the TROJAN LIGHT PEN ... Eureka price of £17.75 ... You buy it for just £9.75

Send your order now to Eureka!" FREEPOST Dept 400 Mount Farm Milton Keynes MK1 1HG

NO STAMP NEEDED

To "Eureka" FREEPOST Dept 400 Mount Farm Milton Keynes MK1 1HG

Please send me "Eureka!" packs, complete with cryptic full-colour booklet Instructions and rules, at £14.95 each PLUS 55p post & packing. If my order is received before 26 October 1984, I will receive a free £7 voucher towards a Trojan light pen Please allow 14 days delivery for Britain received after 26 October.

	Quantity	Total at £14.95
MY COMPUTER IS		
COMMODORE 64		
SPECTRUM 48K		
	TOTAL £	

24 HOUR PHONE HOTLINE NUMBER 01-460 6000 For Credit Card Orders

I enclose payment by cheque/PO payable to DOMARK LTD

OR Please charge my Credit Card VISA ACCESS AMEX

Card Number

Expiry Date Date

Name Signature

Street

Town Post Code ZX

The race for the £25 000 starts on 31 Oct 1984 and closes on 31 Dec 1985

Ultimate Ltd 22B Munster Road, London SW6 Reg No 1804188 (England).

On Line

Ray Elder describes his close encounter with British Telecom

This is an account of how I became one of Prestel's customers, and a description of what the computer information service offers from the point of an interested incompetent.

I have always been fascinated by the more practical aspects of computing, you only have to remember my previous project on using a Spectrum for word processing to realise that, and the thought of being able to access the information on British Telecom's computer intrigued me.

Early in June I contacted Micronet 800, a computer specialist user group who provide an information service on the Prestel Database, and applied for registration with them.

Prestel is very similar to Ceefax and Teletext services offered by the TV companies, in display and basic functions but with two very important differences.

The first is that you can communicate with Prestel by sending messages, replies to questions and quizzes and also download information and programs into your computer or to a printer for a permanent copy.

The second is that you have to pay for it! however at off peak times, after 6.00pm weekdays or 12.00 Saturday or all day Sunday the use of the computer is free, but you still have to pay the standard phone charges either at local or national rates depending on which computer you contact.

In order to use the Prestel computer you must be a member of one of it's user groups, once you become a member then you have access to all the other information in the database except for some pages which another user group has set up and may want to keep private.

Having phoned Micronet, (01-278 3143), a few days later a letter and an application form arrived. I dutifully completed said form and returned it to them the same day. I was starting to become quite excited about it.

The equipment

Before I continue the saga any further it is worth mentioning the various boxes which will allow you to connect your computer to BT's lines. Note that any equipment attached to the phone needs to be approved by BT, so look for their approval sticker before purchasing anything.

A specialist system of a keyboard/keypad and a connection device can be acquired, but for one purposes I'll take a brief look at the modems available to link up the Sinclair computers, both Spectrum and ZX81.

By the way, the modem is a MOdulator/DEModulator and is the device which connects the computer to the phone lines and by which the signals to and from the computer are matched to the signal that is sent over the phone lines.

This use of a universal standard means that you can communicate with someone who is using a completely different micro and not only another Sinclair user.

There are two methods of making the connection probably the cheapest is by an acoustic coupler. This is a rubber device into which you insert the telephone handset and all signals are sent audibly. The computer is then loaded up with accompanying softwares and the connection is made as normal.

The disadvantage with this system is that in a noisy environment extraneous noise may cause the link to fail. An advantage is that if you own a portable computer then information can be sent from a call box anywhere in the world and collected later on your home (or of fice) based machine.

The other method is by using a direct connection via the detachable telephone socket that is fitted to the latest phones installed. If you have the old type at connection then BT will have to change it this may cost £25.00, but many "special" offers are around and Micronet were (and may still be) providing this free when I joined.

Meanwhile...

A week after I posted my application a large envelope bounced off the doormat and was quickly set on by the cat. After removing the moggie I tore it open (the envelope, not the cat) and found a nicely produced folder of information, a Prestel contributors directory, a welcome letter and an advertising brochure from a well known credit card organisation.

The people who provide and maintain the pages are known as Information Providers or IP's — yet another bit of jargon to remember.

The latter proclaimed ' WELCOME TO MICRONET 800! YOU ARE NOW ONLINE TO ONE OF THE WORLD'S LARGEST DATABASES " Except I wasn t.

My phone had one of the older type of connectors and I couldn't link up to the phone lines until a BT chappie changed it. I also had another problem. My phone was situated in the small entrance hall at the front of the house, my computer was set up at the back.

There was no room to put the machine with the phone and it wasn t practical to have a 20ft lead running through the centre of the living room not with a cat that attacks anything, a child who eats anything and other members of the family including myself, who'll trip over anything.

So the phone would have to be moved. No great problem as the line arrived at the back of the house anyway, all they'd need to do was drop it down, bring it in the window and add the new connector.

The other reason that I wasn't online was that all users have their own customer identity and password to prevent someone else from using the service at your expense, this would be forwarded in a seperate envelope later.

With all this justified security I was expecting Securicor and full escort to arrive and not just

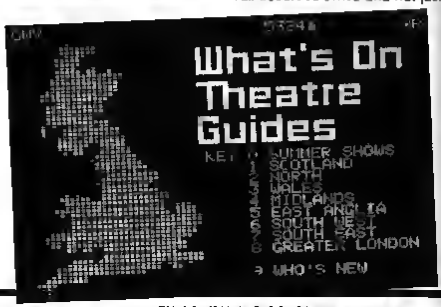

the plain brown envelope that eventually was sat on by the cat

Excitement becoming more intense

The Spectrum box

The unit which I am using is the Prism VTX5000, this is a direct connection device which fits under the Spectrum and is the same length but slightly deeper so that a bit will either stick out in front or at the back. It is compact and has an ON light, a LINE light connected to a toggle switch and a 3 way slide switch marked M/NET, Tx and Rx on the front.

A lead comes from the back of the unit and is plugged into the phone socket, the telephone lead is then plugged into the socket provided at the back of the modem.

A connector ribbon is supplied which has three sockets, one for the back of the unit, one to fit the Spectrum a port and one which provides an extension for the printer etc. This lead was rather short and I would have liked it to have been longer to allow for non standard set ups.

I do not have a Microdrive as yet, but I can foresee difficulties in using both together, some unsatisfactory lashing together of leads and the devices would have to be undertaken. I have my Spectrum housed in a DK Tronics keyboard and there was no chance of the modem fitting beneath it!

I solved the problem by putting the modem on top of the keyboard and plugging one socket into a Currah micro slot adapter. The unit hangs over the back and I support it with wooden block legs, this is only satisfactory because the whole lot is permanently housed in a cabinet and the back is not seen.

The manual is a work of art, only a genius could make something so simple so confusing!

Actually each section of the manual is written in a very clear step by step manner, its just that the sections were put together in a confusing way. The main sections dealing with operating the modem are in two chapters, "The main features" and "User instructions in more detail".

Being a 'do it by numbers' type idiot, I found myself trying to operate the system from the first section which does not contain an adequate explanation. It would have been better if all the details of "How to log on" for instance, were not split into the two sections.

On Wednesday the BT engineer called. I was out, my wife explained what was required, move phone from front to back of house.

"Ummm. Very sorry, that's an 'outside' engineers job. Can't do it, I'll talk to the boss" and away he went. The next week two of them turned up and spent a day drinking tea and climbing ladders. Eventually the phone was repositioned, a very neat job, they even fitted two sockets and also managed to sell us a new phone!

Cost £18.00 (the reason I'm quoting prices is so the Taxman will make an allowance).

Fine — **except** that the phone now permanently picks up radio 4 and this does not seem to be appreciated by Prestel. Excitement reached fever pitch.

ZX81 box

I'm afraid that I haven't been able to test out the ZX81 adaptor as either my letter to them has been lost in the post, or the unit has been delayed on its trip to us. I will quote from the information I have.

The unit fits between the ZX81 and the RAM pack and other peripherals such as the printer and it can be used in conjunction with both acoustic and directly connected modems. With both ZX81 and Spectrum units the screen is changed into a 40 character per line format and the double height and graphic modes are also used.

The ZX81 loses the colour, flash and more sophisticated screen controls but the Spectrum unit copes admirably.

I have been told that the ZX81 screen does not completely fit onto the TV and that a sideways scroll is provided to allow you to read all the text.

Considering the problems it sounds like an ingenious device!

The last roundup

Finally all was ready, connected and powered up. Here we go! As soon as the Spectrum was switched on the Micronet 800 logo appeared, on pressing a key a menu of seven options was presented, the last being to go to BASIC.

I am using the ZX Lprint III Centronics interface to drive a Shinwa printer this has to be initialised before use so I pressed seven. The machine then reset, is cleared out all programs and gave the usual Sinclair copywrite notice.

I initialised the interface and then stopped. There was no way of getting back to the Modem program bar turning off and on the power to the machine, and this would mean the interface would need to be reinitialised!

After many attempts I discovered that by getting into LOAD or SAVE mode from the modem and pressing BREAK, I could initialise the interface and get back to the modem. Fortunately they had allowed for load/save problems and also you may need to get back after downloading software.

Right, option 0, enter my identity, phone number given. When carrier tone (a high pitched whistle) is heard switch on modem, replace phone.

I did. It worked!

After entering my personal password I was greeted by name and allowed free access to the whole lot, and what a lot there is. I haven't counted but there are hundreds, probably thousands of different companies providing information. I was able to demonstrate its use to four people, none of them interested in computers, by finding a subject they were interested in: wines, photography, camping and money.

I was able to save screens on tape or printer for a permanent copy, download software, some free — perhaps not professional quality, but what can you expect — and some charged for.

I can order goods through this system by quoting my credit card number (now I understand why American Express sent their brochure) or reply to questionaires.

I can send and receive messages to other users on the Micronet mailbox, and by joining Directel, another user group, I can use their mailbox facilities.

I also found a "personal" section somewhere in the system which was very amusing, a set of messages to and from users almost like an electronic version of CB.

It would take months to just look at all the info held in the system, but I'm convinced there must be something for everybody and personally I find it the most exciting development that I've encountered.

A word of warning, it is easy to become so engrossed in the system that you lose track of time, remember that all the time you are on line you are being charged for your call at the appropriate rate!

So far I must have spent enough time logged on to keep Buzby in birdseed for a year or two!

I adorn this article with some esmples of the Prestel IP pages, and if any readers are using Micronet already or link up in the figure, then I can be contacted through Mailbox and my number is 31999265 whether I will be able to manage to find the time to reply to everyone who writes will depend on how many people make contact. As usual I'll do my best.

PRISM MICROPRODUCTS LTD (VTX5000)
Prism House,
18-29 Mora Street,
London EC1

MICRONET 800
Telemap Ltd
Scriptor Court,
155 Farringdon Road,
London EC1R 3AD

MICROCOMPUTER RESOURCES (ZX81 adaptor)
1 Branch Road
Park Street Village,
St Albans,
Hertfordshire

MAPLIN ELECTRONIC SUPPLIES (Modem kits, softwere and interfaces)
PO Box 3
Rayleigh,
Essex SS6 8LR

4 printers,

The daisy wheel, dot matrix and colour printers

cassette unit,

For program storage and retrieval. For faster sto

monitor,

Gives really superb reproduction and clarity



joyst

They put the co

a vast range of sof

There's something for everyone and for all interests thought-provoking, amusing, entertai

home,

leisure and practical interests

edu

pre-school and be

and a 64k

Plus excellent sprite graphics

About the only thing the Commodore 64 doesn't ha

printer plotter,



Plots graphs, constructs bar and pie charts. Prints in 4 colours

single disk drive,

retrieval of programs. Uses a 5¼" diskette, and has a very large 170K memory

ck paddles,

games directly into your hands... they also improve both speed and accuracy.

ware (business,

llenging, and exciting. To cover the essential office and business needs...

cational, games)

ated with the help and advice of specialists. From shoot 'em up to strategy

memory.

azing music synthesis capabilities

any serious competition.

THE COMMODORE 64 COSTS JUST £229 (OR LESS)
FOR FURTHER INFORMATION PLEASE TICK ONE, OR MORE, OF THE BOXES AND SEND TO: COMMODORE INFORMATION CENTRE, 1 HUNTERS ROAD, WELDON, CORBY, NORTHAMPTON NN17 1QX. TEL: CORBY (0536) 205252

COMMODORE 64 ☐ MONITOR ☐ CASSETTE UNIT ☐
PRINTERS: PRINTER PLOTTER ☐ DISK DRIVE ☐ SOFTWARE ☐

NAME

ADDRESS

64ZXC/04

commodore

The Sky at Night

J D Nicholson presents a program based on the sky at night in Lincoln.

A neat little program to help you identify some of the constellations, the program will display each of the star patterns in turn asking you each time if you wish to try the test.

If you enter "Y" or "YES" you will be passed on to the test routine, otherwise the program continues to display the next pattern. Once all the sets have been shown, the user is encouraged to try the test.

You must be extremely careful with the strings in the lines from 500 onwards, as a mistake will cause a universal disaster!

I suggest that you check each pattern with the screen dump and make corrections as you go.

The last time I saw stars was when I'd refreshed myself overmuch at the Plough and Harrow.

```
 20 FOR I=1 TO 3
 30 FOR J=0 TO 14
 40 GOSUB J*20+500
 50 PRINT TAB 10;C$
 60 GOSUB 1000
 70 PAUSE 100/I
 80 CLS
 90 NEXT J
100 PRINT "WOULD YOU LIKE TO TR
Y THE TEST?-YES/NO"
110 INPUT X$
120 IF X$(1)="Y" THEN GOTO 150
130 NEXT I
140 PRINT "PLEASE TRY THE TEST"

150 PRINT "WHAT DIFFICULTY-1,2,
-."
160 INPUT A
170 LET D=3-A
180 LET S=0
185 PRINT
190 PRINT "ENTER EACH LETTER SE
PARATELY AND N/LINE AFTER EACH"
191 PRINT
192 PRINT "IF THE ANSWER IS
TWO WORDS REMEMBER TO ENTER
A SPACE BETWEEN THEM"
195 PAUSE 500
200 CLS
210 FOR Q=0 TO 14
220 GOSUB Q*20+500
230 GOSUB 1000
240 PRINT C$( TO Q);
245 FOR K=D+1 TO LEN C$
250 INPUT B$
```

```
 260 IF 8$=C$(k) THEN GOTO 290
 270 LET S=S+1
 280 GOTO 250
 290 PRINT 8$;
 295 NEXT k
 298 CLS
 300 NEXT Q
 310 PRINT "SCORE=";100-S;"/100"

 320 PRINT "DO YOU WANT ANOTHER
TEST? Y/N"
 330 INPUT X$
 340 IF X$(1)="Y" THEN GOTO 150
 350 PRINT "DO YOU WANT TO START
 AGAIN? Y/N"
 360 INPUT X$
 370 IF X$(1)="Y" THEN GOTO 20
 375 CLS
 380 PRINT AT 10,10;"THANK YOU"
 390 STOP
 500 LET A$="22*.21- -.20*    *.2
0-.11-*-------*.09*-21-.08-22*.0
7-22-.06*--*-----------*--*20R
EGULUS."
 510 LET C$="LEO"
 515 RETURN
 520 LET A$="04*---*-.10-.11*.12
---*-------*.15-23-.16-22-.16-22
-.16*------*."
 530 LET C$="URSA MAJOR"
 535 RETURN
 540 LET A$=".12*.12-.12-.12-.12
-17+--------*02DENEB*----*----.12
-.12-.12-.12*.12-.12-.11*."
 550 LET C$="CYGNUS"
 555 RETURN
 560 LET A$="03*.04--.06--20+.08
--21*+.10--17----.12*- --.12-.02
*----    - ++.07-----* ++06ALDEBA
RAN---.18*.19--.21-- +.23-+."
 570 LET C$="TAURUS"
 575 RETURN
 580 LET A$=".10+--*VEGA.13-.13+
.13-.12- -.11-    -.10+16-.11-16+
.12-16-.13- -.14-.14*."
 590 LET C$="LYRA"
 595 RETURN
 600 LET A$=".11*----*CAPELLA.11
-    -.10-17-*.09-17*.09*17-.09-
17-.09-17-.09-17-.10-17-.11-17-.
11-15--*.11- --.12*."
 610 LET C$="AURIGA"
 615 RETURN
 620 LET A$=".06*---*.05-     -.0
4+10-.05-11-.06-11-.07-12+.08-13
+.09-*14-.11--15-20*.13-- -  -.1
5---*ARCTURUS.17-.16+."
 630 LET C$="BOOTES"
 635 RETURN
 640 LET A$=".17*.18*.17-.16-.15
-.14*PROCYON.13-.11-.09-.08+.08-
.07-.07+."
 650 LET C$="CANIS MINOR"
 655 RETURN
 660 LET A$=".03*26*..04-25-..05
-24-..06-23-..07-13-*21-.12-  -.
08-  -    *   -.10-17--*.09*."
 670 LET C$="CASSIOPEIA"
 675 RETURN
 680 LET A$=".08SIRIUS*----*.14-
.13-.13-.13-.12-.12*.12-.12*.11-
 -.10+   *.09-15*------*.08-.07*
.'
 690 LET C$="CANIS MAJOR"
 695 RETURN
 700 LET A$=".13*-.12-  -.11-16*
.BETELGEUZE*16-.10-15-.11-  -.12
- -.12** *.12- + -.11-  + -.11-
 *  -.11-17-.11-18*RIGEL.11*."
 710 LET C$="ORION"
 715 RETURN
 720 LET A$=".07*.08-.09-.10-.11
-.12-.13-.14-.15*.15-.15-.15-.15
*."
 730 LET C$="ARIES"
 735 RETURN
 740 LET A$=".01*.01-06+.02-  +.
03*-.04-.05*.06-16-*.08-*----*-.
09-14-  -.08-14-  *.07-14-.07*----
-*.14+.15*.16-.16-.17-  -*.17*-."

 750 LET C$="PEGASUS"
 755 RETURN
 760 LET A$=".08*15*.08-15-.ALTA
IR*--+.05-  -   -    -.05+-11-  -.12
*.10--  -.09+14-.08-15-.07*16-.17
-.18*."
 770 LET C$="AQUILA"
 775 RETURN
 780 LET A$=".10-*-.09-13-.07+-1
4-.07-14-.08-15-+.09-+--*-.17-..
18-..19-..20+."
 790 LET C$="DELPHINUS"
 795 RETURN
1000 FOR L=1 TO LEN A$
1010 LET N=CODE A$(L)
1015 IF N=27 THEN GOTO 1090
1020 IF N>27 AND N<38 THEN GOTO
1060
1030 PRINT CHR$ N;
1040 NEXT L
1050 RETURN
1060 PRINT TAB VAL (A$(L TO L+1)
);
1070 LET L=L+1
1080 GOTO 1040
1090 PRINT
1100 GOTO 1040
```

'Calling all whizz kids— my CLEVER CLOGS games are the ultimate challenge!'

These exciting games of skill and chance are the combined work of real life Clever Clogs and their teachers to give you whizz kids the ultimate challenge in computer games that really make learning fun.

Exciting graphics, a wide range of difficulty levels, supplementary knowledge packs for several games in the range make Clever Clogs Britain's best buy in early learning software.

Starting with Party Time for Age 3+ the Clever Clogs range brings a unique approach to learning for whizz kids of all ages. And if you join the Clever Clogs Club you'll automatically be eligible for many money-saving special offers.

Selected titles available at W H Smith, Menzies and other leading retailers.

CLEVER CLOGS
early learning games

produced by
ARGUS PRESS SOFTWARE
Golden Square, London W1R 3AB
Telephone: 01 437 0626

Spectrum £7.95 BBC and Commodore 64 £8.95
Supplementary Knowledge Packs £5.95

THE AGE OF THE R.A.T

CONVENTIONAL JOYSTICKS ARE DEAD!

The Cheetah Remote Action Transmitter is the most sophisticated computer controller available.

It has these features

- *Infra Red transmission – so there are no leads trailing across the living room. Just sit back in your chair up to 30 feet from your machine*
- *Touch control – no moving parts, extremely fast, long life*
- *No extra software required*
- *Can be used with all Cheetah RAT/Kempston compatible software*
- *Fits comfortably in your hand for long play periods.*
- *Comes complete with receiver/interface unit which simply plugs into the rear of your Spectrum*
- *Compatible with all Sinclair/Cheetah peripherals via the rear edge connector*

Simply incredible at £29.95 including VAT and p&p.

Dealer enquiries welcome. Export orders at no extra cost.

Send cheque/p.o now to
Cheetah Marketing Ltd.** (Dept. ZX), **24 Ray Street, London EC1R 3DJ. phone 01-833 4909

Cheetah products are also available from branches of
John Menzies WHSMITH Rumbelows
and all good computer shops.

Cheetah Marketing

Spectrum lessons

Mike Edmunds gives learning programs the final exam!

**Five Little Ducks,
Nine Current Buns,
Goldilocks,
Red Riding Hood,
The Enormous Turnip,
The Magic Shop,
Mister Mac's Day,
Hansel and Gretal**

**The Learning Box Series
Spectrum 48K
£9.95 each
Arrow, 17-21 Conway Street, London W1P 6JD.**

When home micros first began to appear, one of their major selling points was the fact that children would be able to continue their education at home. In reality, this claim proved less than accurate, not because of hardware limitations but because the software available did little at the time to inspire prospective buyers. Happily however, this situation has changed and although a lot of mediocre material still manages to get published, a few names are earning a reputation for quality educational software. One such is Fiveways Software whose latest offering for the home/educational market is 'The Learning Box' series published by Arrow.

The series consists of eight titles, each based upon a familiar story or nursery rhyme. They are designed to help childen develop and extend upon basic reading and number skills. Four of the titles: 'Five Little Ducks'? 'Nine currant Buns, 'Goldilocks' and 'Red Riding Hood' are for children up to six years of age. The remaining titles 'The Enormous Turnip', 'Hansel and Gretel', 'Mr. Mac's Day' and 'The Magic Shop' are for childen up to the age of eight.

Each program costs £9.95 and, for the price you get a durable video-style cassette box which contains a storybook, parents guide, keyboard overlay and a tape which has the story on one side (narrated by Toni Arthur) and the program itself. The main emphasis throughout the series is one of structured progression and the activities are intended to be worked through over a length of time rather than as a one-off, repeatable activity.

Each program offers a wide range of options, with anything from four to seventeen activities. These are intended to be used initially with the parent sitting alongside the child, but are structured so that even the youngest child should, quite rapidly, be able to work unaided. This aspect is reinforced by use of the double-sided overlays, which divide the keyboard into coloured sections, thus avoiding the need for the young learner having to search for specific keys.

Quality

An indication of the quality of the programs is seen as soon as the colourful loading page appears — bright, appealing graphics indicate the fun to come! Upon loading, a large-print 'menu-style' option sheet details the range of activities available — Fiveways have designed their own character set and the alphanumerics are large, colourful and nicely formed. This attention to detail is common to all the programs and the standard of graphics, colour and sound throughout is excellent!

For the youngest children the first title is **'Five Little Ducks'** which is divided into two sections, Early Numbers and Counting, with five activities in each. Early Numbers deals with grouping, colour matching and one-to-one correspondence. Counting makes use of the little ducks in the title to demonstrate sequences and numbers up to five. Errors are treated with doleful 'quacks' and the child must try that part of the activity again. Variations on this theme should lead gradually to the child's recognition and understanding of numbers up to five.

'Nine Current Buns' is subtitled 'I can do sums' and it provides seventeen activities to demonstrate the stages of addition and subtraction as well as simple sums. A novel feature, which typifies the 'fun to do' approach is provided by animated '+' and '–' signs. This, combined with many varied objects, such as friendly currant buns or flapping seals, provides an amusing yet effective way of reinforcing the basic concepts involved.

'Red Riding Hood' (I can read words) uses tried and tested educational techniques such as matching pictures, matching letters, word snap and picture snap as an introduction to the recognition of letters and words,

thereby providing a sound basis for reading skills. Characters and events from the stories of both Red Riding Hood and Goldilocks are used in an entertaining way and the child can choose to work alone, play against a friend or play against the computer. The speed of the program is self-adjusting to cater for the differing abilities of the users. This program is full of little surprises and a child cannot fail to be motivated by the sight of Little Red Riding Hood stamping her feet in anger at a wrong answer — to the obvious delight of the hungry looking wolf beside her!

Along similar lines is **'Goldilocks'** (I can read sentences) which also has two sets of vocabulary and introduces groups of words and simple sentences.

For the older child is **'The Enormous Turnip'**, which introduces word making' using a cheeky little mouse to help the old man pull up his turnip. Exercises cover initial sounds, sound blends and simple spelling, all of which are designed to encourage the child's word building skills.

'The Magic Shop' is intended to assist in the understanding of money and its use. This is perhaps the weakest of the programs in that the progression of activities is not very clearly defined and initially a lot more parental guidance is required. The number line' used is also rather confusing and not as clearly defined as it might be. However, having said that, the program is nevertheless a useful aid for a child to reinforce the idea of buing articles and receiving change. It is up to date, including the 20p and £1 coins, but perhaps does not fully achieve it's aim even though the idea of buying and concocting magic potions is undeniably self motivating!

'Mr Mac's Day' helps the child to tell the time. This is done by, amongst other things, helping forgetful Mr. Mac to do the right things at the right time... woe betide you if you make him arrive for work in his best kit! Further activities include 'Driving the engine' (and reaching the destination on time) as well as exercises on Digital Clocks and the 12 and 24 hour clock. This program causes my own (very minor) criticism... there is no provision for adjusting the time backwards in the event of overshooting the time you actually want. (Mind you — I always seem to have the same trouble with my digital watch!) The graphics in this program however more than make up for the minor quibble... they are first rate! — even to the extent of Mr. Mac doing a Highland Fling to the skirl of the bagpipes!

Finally to my favourite of the bunch — **'Hensel and Gretal'**. This is a series of graded activities to encourage word building and spelling using techniques such as 'Make a word' or 'Mend a word'. Again the exercises progress gradually and use a wide range of vocabulary from the story to develop word building skills. The final activity is a novel version of 'hangmen' which is harder than it looks. However, I must admit that this program is my favourite for the simple reason that it contains some of the most imaginative graphics that I have ever seen in an educational program. (Wait till you see the way that the wicked witch gets stuffed into her own oven!)

Overall these are value for money packages with a wealth of activities that will help the learner develop and improve upon basic skills. The Parents Guide also gives plenty of suggestions as to how to help the child and extend upon the subjects covered. This is one of the best sets of educational software I have yet seen for the Spectrum.

Full marks Fivaways and Arrow for some excellent work — to the top of the class!

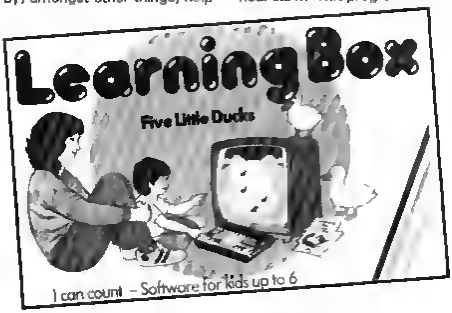

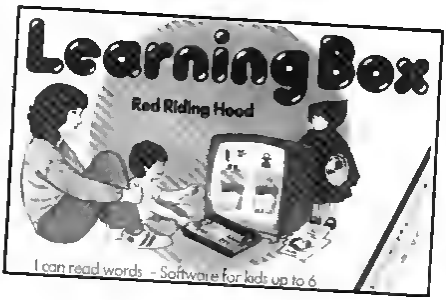

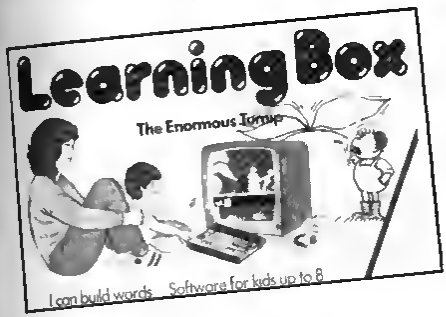

Spectrum Computing adds a new dimension to your micro!

Run this Argus Spectrum tape and you'll soon see why it's Britain's top selling tape magazine. Each issue gives you a variety of exciting and challenging games to play, reviews of other newly released software plus valuable utilities enabling you to write your own programmes and games.

Stretch your imagination and skills with Spectrum Computing – available every other month from WH Smith, Menzies and other leading stores.

(You'll see them advertised on TV from September!)

Get your copy today!

Argus Press Software Group

Argus Tape Magazines produced by
ARGUS PRESS SOFTWARE
1 Golden Square, London W1R 3AB
Telephone. 01 437 0626

Choosing a printer is a lot easier than choosing a computer.

THERE are dozens of quality printers from which to choose. With quality price tags of around £250

The Brother M 1009, however, breaks all the rules.

Stays defiantly below the £200 barrier.

Though it has far more than its fair share of features, it maintains the extraordinarily low price of £199 95

Travels at a steady fifty.

In the speed stakes the M 1009 is certainly no slouch, being fully capable of up to 50 characters per second.

Providing bi-directional and logic seeking printing for normal characters and uni-directional printing for super and sub script and graphics.

Prints on any paper.

Being an impact printer the M 1009 will print on virtually any paper, including letter headings, invoices and standard office stationery

It will even print two copies together with your original

A superb character recommendation.

In its price range, the M-1009 has a great deal more character than many printers

96 no less, plus international type and graphic characters

Reliability comes as standard.

Built to the same exacting standards as Brother's elite office printers, the Brother M 1009 already has faultless credentials for reliability

Its 9 x 9 dot matrix head, for example, has an astonishing 20 million character service life

One printer that doesn't block out the light.

Many home computers tend to be a little on the large side

In contrast, the compact M 1009, at only 7 cm high, keeps a discreet profile.

Well designed, reliable - and conscientious

The Brother M-1009

brother

The future at your fingertips.

DEPT I BROTHER OFFICE EQUIPMENT DIVISION, JONES + BROTHER, SHEPLEY STREET GUIDE, SHEFFIELD, AUDENSHAW, MANCHESTER M34 5JD
TEL 061 330 6531 (10 LINES) 061 330 0181 (6 LINES) 061 330 3026 (4 LINES) TELEX 669097 BROTHER INDUSTRIES LIMITED NAGOYA JAPAN.

AVAILABLE FROM

BOOTS, W H SMITH WILDINGS SPECTRUM U.K. MAJOR DEPARTMENT STORES AND BROTHER OFFICE EQUIPMENT RETAILERS

The Golden Chalice

Part 2

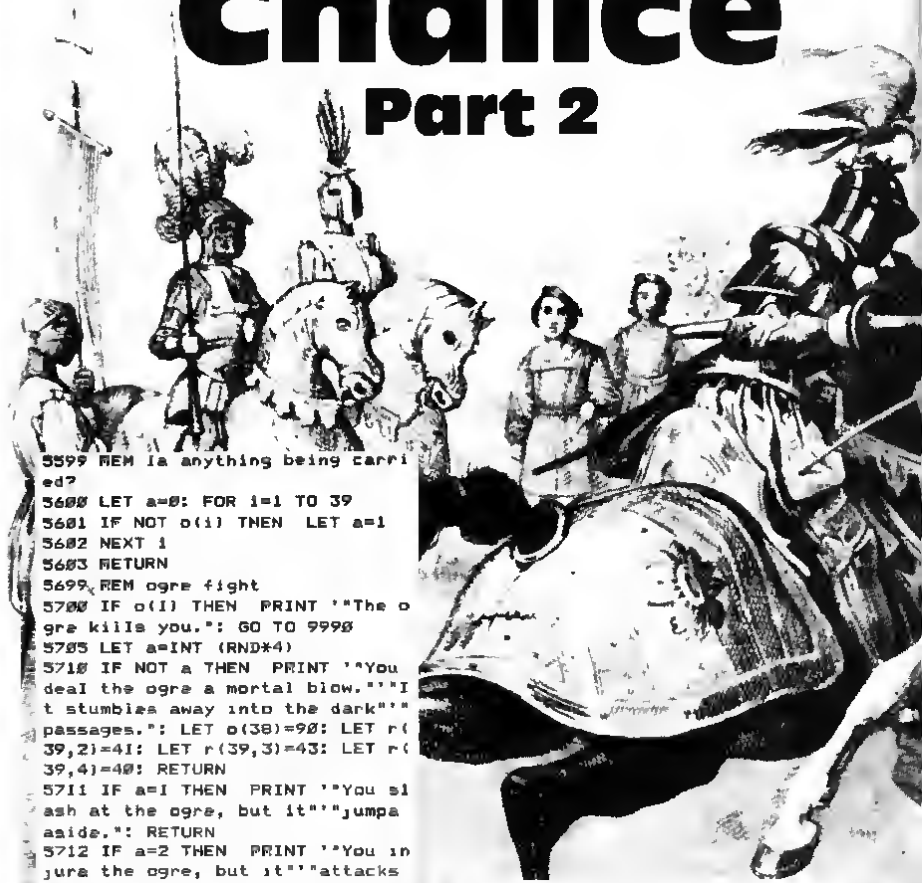

```
5599 REM Is anything being carri
ed?
5600 LET a=0: FOR i=1 TO 39
5601 IF NOT o(i) THEN  LET a=1
5602 NEXT i
5603 RETURN
5699 REM ogre fight
5700 IF o(1) THEN  PRINT '"The o
gre kills you.": GO TO 9990
5705 LET a=INT (RND*4)
5710 IF NOT a THEN  PRINT '"You
deal the ogre a mortal blow."'"I
t stumbles away into the dark"'"
passages.": LET o(38)=90: LET r(
39,2)=41: LET r(39,3)=43: LET r(
39,4)=40: RETURN
5711 IF a=1 THEN  PRINT '"You sl
ash at the ogre, but it"'"jumpa
aside.": RETURN
5712 IF a=2 THEN  PRINT '"You in
jure the ogre, but it"'"attacks
again.": RETURN
5713 PRINT '"The ogre parries yo
ur blow, and"'"lunges at you aga
in.": RETURN
5899 REM location separator
5900 PRINT '"*******************
**************"'': RETURN
```

```
6000 REM locations
6020 PRINT " You are in a small,
dimly lit"'"room containing vari
ous items of"'"well-worn furnitu
re."'" A door is open to the eas
t."
6022 GO SUB 750: RETURN
```

As promised, we bring you the second and final part of our king-size Spectrum adventure.

To recap on the notation for the Golden Chalice program, as published with part 1 in the August/September issue of *ZX Computing*, here is a brief description of the program.

The main routine (lines 200-350) checks the input first for movement (single letter ?) then for the few verbs that single word entry is allowed and finally for the standard two word (Verb Noun) entry.

If movement is required then subroutine 600 checks that it is valid. Subroutine 750 prints the permitted movements from the new location and any visible objects. 6000-7100 are the location subroutine lines.

When an action is required then each verb is allocated it's own subroutine which checks all the conditions necessary for that action to take place — provided that both verb and noun have been recognised by the input routine!

Main Variables

R	—Current location number
R(,)	—Permitted movements, modified as game proceeds
O$	—Object names
O()	—Object locations, hidden objects = location 90, carried objects = location 0

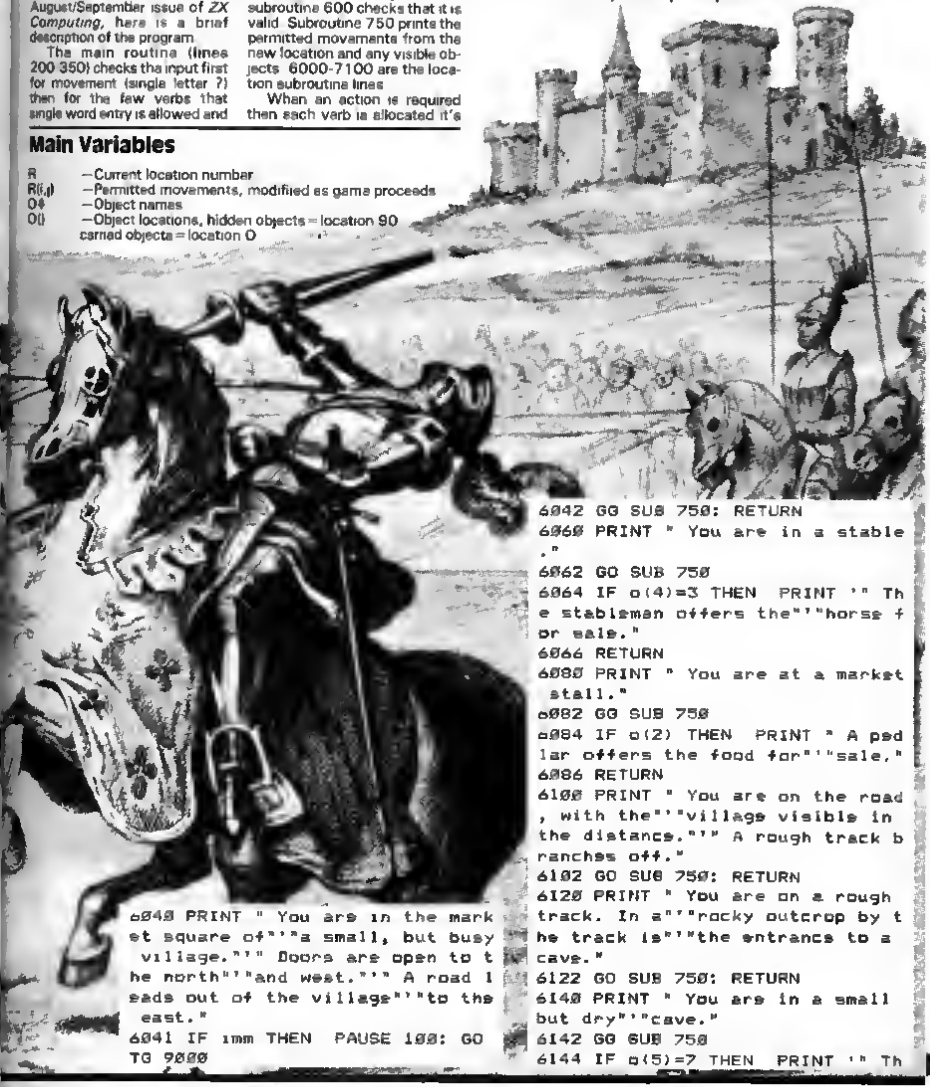

```
6040 PRINT " You are in the mark
et square of""a small, but busy
 village."" Doors are open to t
he north""and west."" A road l
eads out of the village""to the
 east."
6041 IF inm THEN  PAUSE 100: GO
TO 9000
6042 GO SUB 750: RETURN
6060 PRINT " You are in a stable
."
6062 GO SUB 750
6064 IF o(4)=3 THEN  PRINT '" Th
e stableman offers the""horse f
or sale."
6066 RETURN
6080 PRINT " You are at a market
 stall."
6082 GO SUB 750
6084 IF o(2) THEN  PRINT " A ped
lar offers the food for""sale,"
6086 RETURN
6100 PRINT " You are on the road
, with the""village visible in
the distance."'" A rough track b
ranches off."
6102 GO SUB 750: RETURN
6120 PRINT " You are on a rough
track. In a""rocky outcrop by t
he track is""the entrance to a
cave."
6122 GO SUB 750: RETURN
6140 PRINT " You are in a small
but dry""cave."
6142 GO SUB 750
6144 IF o(5)=7 THEN  PRINT '" Th
```

```
e hermit says: To reach your"'"g
oal you must enter the'`"roggoth
's lair. But beware!"
6146 RETURN
6160 PRINT " You are on the high
 road."'"A rough track branches
northward"'" In the distance you
 see the"'"Wood Perilous."
6162 GO SUB 750: RETURN
6180 PRINT " You are at a bridge
 by a"'"stream which runs along
the edge"'"of the Wood Perilous.
"
6182 GO SUB 750: RETURN
6200 PRINT " You are on the bank
 of the"'"stream on the western
edge of";"the Wood."
6202 GO SUB 750: RETURN
6220 PRINT " Here the stream run
s into a"'"clear, sparkling pool
."
6222 GO SUB 750
6224 IF o(7)=11 THEN  PRINT " Th
e knight lies on the grass"'"som
e yards from the pool,"'"sorely
wounded. He groans and"'" asks f
or water."
6226 RETURN
6240 PRINT " You are in the Wood
. To the"'"north is a door."
6242 GO SUB 750
6244 RETURN
6260 PRINT " Inside the hut is a
n old woman"'"who sits at a spin
ning wheel,"'" She says: I am al
l-seeing."'"SAY what you require
."
6262 GO SUB 750: RETURN
6280 PRINT " You are in the dept
hs of the'`"Wood, at a joining o
f several"'"infrequently trodden
 paths."
6287 GO SUB 750: GO SUB 9200: RE
TURN
6300 PRINT " You are among dense
 undergrowth"'"where the paths a
re difficult"'"to follow.'
6302 GO SUB 750: GO SUB 9200: RE
TURN
6320 PRINT " You arrive at a sma
ll and"'"gloomy clearing."
6322 GO SUB 750
6324 IF o(12)=16 THEN  PPINT '"T
he wolf leaps forward and"'"atta
cks you."
6326 IF o(1) AND o(12)=16 THEN
PRINT " You are unable to resist
 his"'"attack snd are severely i
njured."'"You die two days later
...": GO TO 9990
6330 RETUPN
6340 PRINT " You are by the stre
am. The Wood"'"is to the east."
6342 GO SUB 750: PETURN
6360 PRINT " The stream here ent
ers a narrow"'"rocky valley."
6362 GO SUB 750: RETURN
6380 PPINT " You reach a high ro
ck face."'"The stream gushes for
th from"'"a narrow crack at its
base."
6381 IF o(37)=19 THEN  PRINT '"O
n the ground is a crumpled"'"pie
ce of paper resembling a map."
6382 GO SUB 750: RETURN
6400 PRINT " You are following a
 path among"'"tall ferns."
6402 GO SUB 750: RETURN
6420 PRINT " You come to a sheer
 wall of"'"rock. At the foot of
the rock"'"face is a cave entran
ce."
6421 GO SUB 750
6422 IF o(14)=21 THEN  PRINT '"Y
ou are in urgent need of"'"advic
e!' Press any key."
6424 IF o(14)=21 AND INKEY$="" T
HEN  GO TO 6424
6426 IF o(14)=21 THEN  CLS : PRI
NT "'" You may not know much abo
ut"'"the roggoth - and this is n
ot"'"surprising, since no one ha
s"'"ever encountered one and liv
ed"'"to tell the tale'"'" All t
hat is known is that the"'"creat
ure is virtually"'"indestructabl
e. It pursues its"'"prey relentl
essly, once aroused.'" Your onl
y hope lies in speed."
6428 RETURN
6440 PRINT " The trees are close
 together"'"and the light poor.
The ground"'"underfoot is wet an
d slippery."
6442 GO SUB 750: GO SUB 9200: RE
TURN
6460 PRINT " You pass among slim
y, moss-"'"-covered tree trunks,
 picking"'"your way carefully ac
ross the"'"boggy ground."
6462 GO SUB 750: RETURN
6480 PRINT " The trees thin out
here, and"'"the way to the south
 is blocked"'"by a high cliff. A
 stream"'"tumbles down the cliff
,"'"splashing down by the side o
f"'"a cave entrance."
6482 GO SUB 750: PETURN
```

```
6500 PRINT " You are in a foul-s
melling"''"cave - it is clearly t
he""dwelling of a troll."
6502 GO SUB 750
6504 IF o(13)=25 THEN  PRINT ""
You encounter the troll as he"'"
is leaving the cave."
6506 IF o(13)=25 THEN  PRINT " T
he troll grabs you, pounds"'"you
r head against the cave wall,"'"
and makes a pie with you later"'
"in the day.....": GO TO 9990
6507 RETURN
6520 PRINT " You are in a large
cavern -"'"the living quarters o
f the"'"roggoth."
6521 IF o(2)<>90 THEN  PRINT '"Y
our adventures have exhausted"'"
you - you are too weak to"'"cont
inue."
6522 GO SUB 750
6523 RETURN
6540 PRINT " You are in a dark a
nd narrow"'"passage."
6542 GO SUB 750: RETURN
6560 PRINT " You are in a small
dark"'"chamber."
6562 GO SUB 750: RETURN
6580 PRINT " You are in a narrow
 passage."'"In the dim light you
 see"'"rough stone steps."
6582 GO SUB 750: RETURN
6600 PRINT " You are in a very d
ark chamber."'"Steps lead up and
 down."
6602 IF light AND NOT o(10) THEN
  PRINT " In the lamplight you s
ee a"'"fearful drop into a chasm
 to"'"the north."
6604 GO SUB 750: RETUPN
6620 PRINT ' You are in a spacio
us cavern."
6621 IF NOT light OR o(10) THEN
 PRINT "It is too dark to see an
ything"'"clearly."
6622 IF light AND NOT o(10) THEN
  PRINT " In the lamplight you s
ee a"'"fearful drop into a chasm
 to"'"the north. In a recess in
the"'"cavern wall you see an iro
n"'"door."
6624 GO SUB 750: RETURN
6640 PRINT " You are in a passag
e which"'"slopes slightly downwa
rds to"'"the east."
6641 IF NOT light OP o(10) THEN
 PRINT "It is too dark to see an
ything"'"else."
6642 IF light AND NOT o(10) THEN
  PRINT ' In the lamplight you s
ee a"'"frightful drop into a cha
sm to"'"the east."
6646 GO SUB 750: RETURN
6660 PRINT " You fall into a bot
tomless"'"chasm."
6661 PAUSE 50
6662 BORDER 0: PAPER 0: INK 7: C
LS
6664 PRINT " You fall...": FOR i
=1 TO 5: PRINT '"and fall....":
 PAUSE 50: NEXT i: GO TO 9990
6680 GO TO 6660
6700 GO TO 6660
6720 PRINT "You stand at the foo
t of a"'"flight of roughly carve
d stone"'"steps. A dim greenish
light"'"can be seen to the east.
"
6722 GO SUB 750: RETURN
6740 PRINT " You stand in a colo
ssal cavern"'"on the shore of an
 underground"'"lake stretching e
astward as far"'"as you can see.
 The roof of the"'"cavern, hundr
eds of feet above"'"you, glows w
ith a pale greenish light."'" Ne
arby are the entrances to"'"two
tunnels."
6742 GO SUB 750: RETURN
6760 PRINT " You are in a small
cave on the"'"lake shore. Furthe
r in, the cave"'"narrows to a me
re crack which is"'"far too narr
ow for you to enter."
6762 GO SUB 750: RETURN
6780 PRINT " You are at the foot
 of a flight"'"of stone steps, a
t a junction"'"of passages."
6782 GO SUB 750
6783 IF o(38)=r THEN  PRINT '"Th
e ogre attacks you.": RETURN
6798 RETURN
6800 PRINT " You are in a dark a
nd narrow"'"passage."
6801 GO SUB 9250
6802 GO SUB 750: RETURN
6820 PRINT " You are at a junctı
on of"'"passages."
6821 GO SUB 9250
6822 GO SUB 750: RETURN
6840 PRINT " You are in a small
cavern"'"which shows signs of ha
ving"'"been once inhabited by so
me"'"creature. High up - and jus
t out"'"of reach, a ledge has be
en"'"carved out of the living ro
ck."
6842 GO SUB 750: RETURN
```

```
6860 PRINT " You squeeze along a
 narrow"'"passage."
6861 GO SUB 9250
6862 GO SUB 750: RETURN
6880 PRINT " You stand in a smal
l cave which"'"has obviously bee
n  occupied by"'"someone-or some
thing-long ago."
6882 GO SUB 750
6884 IF o(33)=44 THEN  PRINT " T
he bench is roughly hewn out"'"o
f solid wood."
6886 RETURN
6900 PRINT " You travel east in
the boat"'"for some time, propel
led by a"'"gentle breeze. But th
e breeze"'"dies, and the boat is
 becalmed"'"on the seemingly lim
itless and"'"utterly still green
 lake."'" Far to the west you ca
n just"'"see the shore you have
left."
6902 IF o(21)  THEN  PPINT '" You
 drift aimlessly and die"'"some
days later....": GO TO 9990
6904 GO SUB 750: RETURN
6920 IF NOT o(36) THEN  PRINT "
After rowing for many days"'"tow
ards the east, you land on a"'"r
ocky shore with cliffs which"'"t
ower above you. Steps are"'"carv
ed into the cliff face."
6921 IF o(36) THEN  PRINT "You s
tand on a rocky shore, with"'"cl
iffs which tower above you."'"St
eps are carved into the cliff"'"
face."
6922 IF NOT o(36) THEN  PRINT '"
 A sudden breeze-the first for"'
"days-catches the boat and it"'"
drifts far out into the lake.":
LET o(36)=90: LET o(21)=90: GO S
UB 750: RETUPN
6924 GO SUB 750: RETURN
6940 PRINT " You are on the clif
f face. The"'"steps continue upw
ard, with a"'"dizzy sheer drop t
o the rocks"'"below."'"Above you
 see the ruins of an"'"ancient t
emple."
6942 GO SUB 750: RETURN
6960 GO SUB 9300: PRINT " You st
and at the entrance of"'"the leg
endary temple of Ragadan."
6962 GO SUB 750: RETURN
6980 PPINT " You stand in a vast
 hall, with"'"pillars of gold ri
sing upwarde"'"to a vaulted ceil
ing."
6982 GO SUB 750
6984 PRINT " A narrow stair rise
s from an"'"alcove in the north
wall."'" A broad stair leads dow
nwards."
6986 RETURN
7000 PRINT " You are in a circul
ar room at"'"the top of a tall t
ower."
7002 GO SUB 750: RETURN
7020 PRINT " You are in a long s
traight"'"corridor."
7022 GO SUB 750: RETURN
7040 PRINT " You stand in a smal
l alcove at"'"the southern end o
f the"'"corridor."
7042 GO SUB 750
7044 IF o(25)=52 THEN  PRINT '"
The book reste in a recess. The"
'"binding is of leather embossed
"'"with beaten gold."
7046 RETURN
7060 PRINT "You stand before a g
olden door,"'"carved with wonder
ful and"'"mysterious designs."
7062 GO SUB 750: RETURN
7080 PRINT " You are in a small,
 stone"'"walled room."
7081 GO SUB 750
7082 IF o(29)=54 THEN  PRINT '"B
efore you, in an alcove, stands"
'"the golden chalice of Ragadan.
"
7096 RETURN
8999 REM end of quest display
9000 CLS : PRINT '" You are gree
ted by rousing"'"cheers from the
 villagers."'"Within minutes th
e square is"'"filled with people
,excited by"'"the news of your r
eturn."'" Before many days are
out, you"'"are crowned king, and
 during the"'"following centurie
s the land"'"prospers as you ste
adily acquire"'"the wisdom of ag
e, while"'"retaining the vitalit
y of youth."
9005 PRINT '"Thus ends the quest
 of the"'"chalice of Ragadan."
9010 IF INKEY$="" THEN  GO TO 90
10
9015 RUN
9099 REM map graphics
9100 BORDER 2: PAPER 6: INK 1: C
LS
9105 PLOT 80,0: DRAW 8,16: DRAW
-8,8: DRAW -8,0: DRAW -8,16: DRA
W -16,0: DRAW -16,16: DRAW -8,8:
 DRAW -8,8: DRAW 0,8: DRAW 8,8:
```

```
DRAW 8,8: DRAW 8,0: DRAW 8,8: DR
AW 0,8: DRAW -8,16: DRAW 0,8: DR
AW 8,16: DRAW -2,8: DRAW 2,8: DR
AW 8,8: DRAW 8,19
9110 PLOT 136,0: DRAW 0,16: DRAW
 8,0: DRAW 2,16: DRAW 6,0: DRAW
8,16: DRAW 0,8: DRAW 0,0: DRAW 8
,16: DRAW -8,8: DRAW -4,0: DRAW
-12,16: DRAW 8,8: DRAW 8,0: DRAW
 8,8: DRAW -16,8: DRAW -8,16: DR
AW 8,8: DRAW 2,8: DRAW -2,8: DRA
W -8,8: DRAW 0,7
9115 PLOT 72,120: DRAW 4,0: DRAW
 4,8: DRAW 4,0: DRAW 0,8: DRAW 4
,8: DRAW -4,4: DRAW -4,-4: DRAW
-4,0: DRAW -4,-4: DRAW 0,-4: DRA
W -4,-4: DRAW 0,-4: DRAW 4,-8
9120 PLOT 112,136: DRAW 0,32: DR
AW -4,-4: PLOT 112,168: DRAW 4,-
4: PLOT 108,152: DRAW 0,0: PLOT
208,120: DRAW 0,8: DRAW -4,8: DR
AW 8,0,-PI: DRAW -4,-0: PLOT 204
,128: DRAW 8,0
9125 PLOT 100,78: DRAW 40,0: DRA
W 0,2: DRAW -40,0: DRAW 0,-2: PL
OT 100,104: DRAW 40,0: DRAW 0,2:
 DRAW -40,0: DRAW 0,-2: PLOT 100
,106: DRAW 20,8: DRAW 20,-8: PLO
T 192,80: DRAW 0,24: PLOT 194,00
: DRAW 0,24: PLOT 199,80: DRAW 0
,24: PLOT 201,80: DRAW 0,24: PLO
T 207,90: DRAW 0,24: PLOT 209,80
: DRAW 0,24: PLOT 215,80: DRAW 0
,24: PLOT 217,80: DRAW 0,24: PLO
T 222,80: DRAW 0,24: PLOT 224,00
: DRAW 0,24
9130 FOR i=0 TO 8 STEP 4: PLOT 8
8,64+i: DRAW 4,4: DRAW 4,-4: DRA
W 4,4: DRAW 4,-4: DRAW 4,4: DRAW
 4,-4: DRAW 4,4: DRAW 4,-4: DRAW
 4,4: DRAW 4,-4: NEXT i
9135 PRINT  INK 2;AT 9,1;"Caves"
;AT 7,2;"of";AT 9,1;"Doom";AT 13
,24;"Ragadan"
9140 PRINT  INK 1;AT 7,12;"The";
AT 9,11;"Great";AT 11,11;"Lake";
AT 0,14;"N"
9145 PRINT  INK 2;AT 10,24;"THE"
;AT 20,21;"LOST LANDS"
9150 IF INKEY$="" THEN  GO TO 91
50
9155 BORDER 7: PAPER 7: INK 0: C
LS : GO SUB 6000+20*r: RETURN
9199 REM creepy events in Wood
9200 LET a=INT (RND*10)
9201 IF a(14)<>21 THEN  RETURN
9202 IF NOT a THEN  PRINT "You
hear a rustling in ths"'"undergr
owth.": RETURN
9204 IF a=1 THEN  PRINT "Someth
ing creepy drops from"'"above. Y
ou brush it off.": RETURN
9206 IF a=2 THEN  PRINT '"You he
ar an eerie wailing in the"'"dis
tance.": RETURN
9208 IF a=3 THEN  PRINT '"An arr
ow whistles by, narrowly"'"missi
ng you.": RETURN
9210 IF a=4 THEN  PRINT '"A snak
e hisses and slithers away": RET
URN
9212 IF a=5 THEN  PRINT '"A frig
htened deer runs past.": RETURN
9214 IF a=6 THEN  PRINT '"You gl
impse a figure among the"'"trees
,but it disappears.": RETURN
9216 IF a=7 THEN  PRINT '"The su
n goes behind a cloud, and"'"the
 forest gloom deepens.": RETURN
9220 RETURN
9249 REM creepy events in caves
9250 LET a=INT (RND*10)
9252 IF NOT a THEN  PRINT '"Some
thing scuttles in a corner.": RE
TURN
9254 IF a=1 THEN  PRINT '"A bat
flies past, screeching.": RETURN

9256 IF a=2 THEN  PRINT '"Someth
ing slimy slithers over"'"your f
oot.": RETURN
9258 IF a=3 THEN  PRINT '"You he
ar a faint, unidentifiable"'"sou
nd echoing along the caves.": RE
TURN
9260 IF a=4 THEN  PRINT '"A cobw
eb brushes your face.": RETURN
9262 IF a=5 THEN  PRINT '"Two gr
een eyes stare at you from"'"a d
ark recess, and disappear.": RET
URN
9264 IF a=6 THEN  PRINT '"You he
ar something crawling"'"along th
e passage behind you.": RETURN
9280 RETURN
9299 REM temple graphics
9300 BORDER 4: PAPER 4: INK 0: C
LS
9304 PLOT 0,20: DRAW 8,0: DRAW 8
,-4: DRAW 232,0: DRAW 7,6: PLOT
16,16: DRAW 0,4: DRAW 224,0: DRA
W 0,-4: PLOT 24,20: DRAW 0,4: DR
AW 208,0: DRAW 0,-4: PLOT 32,24:
 DRAW 0,4: DRAW 8,0: DRAW 0,4: D
RAW 176,0: DRAW 8,-4: DRAW 8,0:
DRAW 8,-4
9306 PLOT 48,32: DRAW 0,4: DRAW
8,0: DRAW 0,96: DRAW -4,0: DRAW
```

```
8,4: PLOT 88,32: DRAW 0,4: DRAW
-8,0: DRAW 0,96: DRAW 4,0: DRAW
0,4
9307 PLOT 88,32: DRAW 0,4: DRAW
8,0: DRAW 0,96: DRAW -4,0: DRAW
0,4: PLOT 120,32: DRAW 0,4: DRAW
 -8,0: DRAW 0,96: DRAW 4,0: DRAW
 0,4
9308 PLOT 136,32: DRAW 0,4: DRAW
 8,0: DRAW 0,76: DRAW 4,0: DRAW
0,4: DRAW 4,0: DRAW 0,4: DRAW 4,
0: DRAW 0,-4: DRAW 4,0: DRAW 0,-
80: DRAW 8,0: DRAW 0,-4
9309 PLOT 56,132: DRAW 16,8: PLO
T 96,132: DRAW 16,0: PLOT 56,36:
 DRAW 16,8: PLOT 96,36: DRAW 16,
0: PLOT 144,36: DRAW 16,0: PLOT
184,36: DRAW 16,0
9310 PLOT 176,32: DRAW 0,4: DRAW
 8,0: DRAW 0,64: DRAW 4,0: DRAW
0,4: DRAW 4,0: DRAW 0,-4: DRAW 4
,0: DRAW 0,-4: DRAW 4,0: DRAW 0,
-60: DRAW 8,0: DRAW 0,-4
9312 PLOT 40,136: DRAW 96,0: DRA
W 0,4: DRAW -96,0: DRAW 0,-4: PL
OT 48,140: DRAW 0,4: DRAW 8,0: D
RAW 0,4: DRAW 16,0: DRAW 0,4: DR
AW 12,0: DRAW 0,4: DRAW 24,0: DR
AW 0,4: DRAW 4,0: DRAW 0,-12: DR
AW 8,0: DRAW 0,-4: DRAW 8,0: DRA
W 0,-4
9314 PLOT 0,72: DRAW 16,16: DRAW
 16,8: DRAW 8,2: DRAW 8,-2: DRAW
 8,-4: PLOT 72,88: DRAW 16,-8: D
RAW 8,-8: PLOT 112,68: DRAW 8,-4
: DRAW 8,-8: PLOT 128,56: DRAW 1
6,8: DRAW 8,8: PLOT 168,80: DRAW
 8,4: DRAW 8,0: DRAW 8,4: PLOT 2
00,92: DRAW 8,0: DRAW 32,-16: DR
AW 8,0: DRAW 7,4
9316 FOR i=1 TO 11: PRINT  INK 6
;AT 5+i,8;"▌";AT 5+i,13;"▌": NEX
T i
9317 FOR i=1 TO 9: PRINT  INK 6;
AT 7+i,19;"▌": NEXT i: FOR i=1 T
O 7: PRINT  INK 6;AT 9+i,24;"▌":
 NEXT i
9320 IF INKEY$="" THEN  GO TO 93
20
9322 BORDER 7: PAPER 7: INK 0: C
LS : RETURN
9499 REM title graphics & instr.
9500: BORDER 0: PAPER 1: INK 6:
CLS
9505 PLOT 0,48: DRAW 255,0: PLOT
 96,48: DRAW 16,4: DRAW 8,4: DRA
W 4,4: DRAW 0,12: DRAW -12,0: DR
AW -8,0: DRAW -16,32: DRAW -16,8
: DRAW 112,0: DRAW -16,-8: DRAW
-16,-32: DRAW -8,-8: DRAW -12,-8
: DRAW 0,-12: DRAW 4,-4: DRAW 8,
-4: DRAW 16,-4
9510 PRINT AT 16,9;"▌▌▌▌▌▌▌▌▌▌
▌▌▌";AT 17,9;"▌▌THE GOLDEN▌▌";AT
 18,9;"▌▌▌▌▌▌▌▌▌▌▌▌▌▌▌";AT 19,9;"▌
▌▌CHALICE▌▌▌";AT 20,9;"▌▌▌▌▌▌▌▌
▌▌▌▌▌▌▌"
9515 PLOT  INK 5;120,80: DRAW  I
NK 5;0,16: DRAW  INK 5;-4,0: DRA
W  INK 5;8,0,-PI: DRAW  INK 5;-4
,-8: PLOT  INK 5;124,104: DRAW
INK 5;8,0
9520 RETURN
9600 PRINT '" According to lege
nd there"'"existed, in the ancie
nt temple"'"of Ragadan, a golden
 chalice."'"Drinking from the ch
alice was"'"reputed to confer im
mortality."
9602 PRINT '" Unfortunately, ove
r the"'"centuries, the location
of"'"Ragadan has become lost. On
ly"'"the legends remain."
9604 PRINT '"Your quest is to se
ek out the"'"temple,'drink the i
mmortal"'"draught, and return sa
fely home."
9606 IF INKEY$="" THEN  GO TO 96
06: CLS
9607 CLS
9608 PRINT "       INSTRUCTIONS"

9610 PRINT '"To move north, sout
h, east, west"'"up, or down, typ
e:"'"n, s, e, w, u, d"
9616 PRINT '"The following verbs
 should be"'"entered as single w
ords:"'"look, wait, dismount."
9618 PRINT '"The following verbs
 may also be"'"used, but must be
 followed by"'"a noun:"'"open, t
ake, examine, enter,"'"fight, gi
ve, mount, drop, buy,"'"climb."
9620 PRINT "You may also use exp
ressions"'"such as 'climb onto .
....'"'"This list is not exhaust
ive."'"You will have to discover
 the"'"others yourself."
9621 PRINT "To see what you are
carrying: i"
9622 IF INKEY$="" THEN  GO TO 96
22
9623 CLS
9630 RETURN
9989 REM dead heroes come here!
9990 IF INKEY$="" THEN  GO TO 99
90
9991 RUN
```

LOOK!!

THE DATA RECORDER

Meow Micros

DESIGNED FOR RELIABLE SAVING & LOADING OF COMPUTER DATA

* COMPACT SIZE
(200mm x 130mm x 50mm)
* HIGH RECORD LEVEL
* AUTO STOP
* OUTPUT CUT ON RECORD
(leads left connected)
* AUDIO MONITOR ON LOAD & SAVE

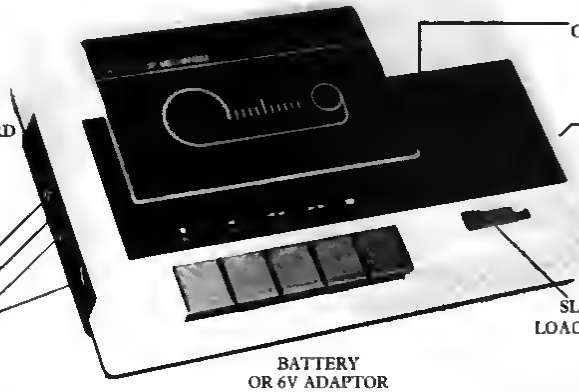

SPECTRUM £24.95

ZX81 £27.95
INCLUDING INTERFACE

GUARANTEED FULLY COMPATIBLE
WITH SPECTRUM & ZX81 OR YOUR MONEY BACK!!

LOOK!! SUPER SOFTWARE

NEW SPECTRUM TAPE PRICES!!

SPECTRUM 16K — PURRRFECT VALUE tapes for each computer — **ZX81 16K**

Road Race
A 3D moving road is seen through the windscreen. You must stay on the road for 45 miles. Full control of gas, gears, moving. Full multiple display

Golf Play your way round a 9 hole random course. Each hole is set with bunkers, out of bounds & water hazards. 3D graphics. Full set of clubs, putting, full score display

Kludo for 2 to 6 players with cocoon weapons, suspects. Full board display, caboom solutions and dealing. Good fun for all the family

Stormforce
An original board game for 2 players. Each player has 6 cocoonoodos and a field gun. Capture the enemies flag. Hidden mines and action graphics.

Invasion Gunner
Super fast MC! 3D moving display Lasers, shields, 2 part invaders, 3 levels. Quick reactions needed!

Soccer 6 a side game for 2 players. Rebounding ball, moving men, score, goals, fouls. Plan view of pitch.

Bar Billiards
1 or 2 Players. Computer plays 3 Red ball, break and total score, plus view of table with mushrooms.

Battleships
You battling the computer in this popular board game. Set your fleet, computers is random.

Starbuster
You are hemmed in by a galaxy of stars, novas and super novas. Blast them to bits and move. High score chart.

Master of the Rings
Avoid losing lives, Search snake pit, ravine, trees, mines, black rings, dusk riders. All with Oops. Find 6 hidden rings. Action graphics.

SPECTRUM (£3.50 each)
£6.00 for 2 tapes

2 SUPER GAMES ON EACH TAPE!!

ZX81 (3.50 each)
£6.00 for 2 tapes

SPECTRUM 48K

NEW!!

FISHY DICK
Dick must catch the fast moving fish as they swim in his river. He can cast and strike. Mind the ducks! Beautiful graphics. All machine code. The more fish you catch the harder it gets! Cast & Strike with different bait for each fish

£3.50

LOOK!!

PROGRAMMERS WORKSHOP

- **Character Generator** block display generation of 21 UDG's & 147 extra in game storage
- **Memory Peeker**
- **Tape Header Disembler**
- **Attributes Calculator**
- **M.C. Sound Effects Generator** 1000's of combinations single note, stepped twin & two tone
- **Number Converter** Binary—decimal—hex up to 16 bit
- **Number Translator** In Bit To Lo & H order bytes in hex or decimal
- **UDG Array Display** Block displays of stored graphics

ONLY
£3.50!

ALL Tape Prices include Postage and Packing and VAT
Data Recorder ADD £1.50 Postage, Packing & Insurance
Allow 7—14 days for delivery
Send cheques or Postal Orders only
Overseas orders for software tapes only! (ADD £1.00)

Meow Micros
8 Newnham Close
BRAINTREE, Essex CM7 7PR
Tel: (0376) 22425

Slogo

Part 3

David Nowotnik concludes his fascinating series on this adaptation of LOGO.

In this, the final part of the series, I'll be providing you with the last part of my LOGO program for 48K Spectrums, and showing you structured programming with LOGO.

To incorporate the program in this issue with the version you completed last time, first enter the listing in fig 1 into your computer, then store it on tape. Then, load into your Spectrum the program completed last time (from parts 1 and 2), then MERGE this issue's program into it. Finally, save a copy of the completed program then you're ready to RUN.

New Commands

There are two additional commands created by the extra routines in this issue. The first is BACKGROUND (BG), which allows you to define the paper colour in specified areas of the screen. Five numbers are required after BACKGROUND to complete the command. Here is an example which you can try:

BACKGROUND 0 0 31 6 5

The first four numbers define the area, a rectangle to be "painted" and the last number is the colour (0 to 7 as shown on the Spectrum keyboard). The first two numbers are the x and y co-ordinates of the top left point of the area to be coloured. In the example, 0 0 refers to the top left of the screen, unlike the co-ordinates for SET which start at the bottom of the screen. In fact the first two BACKGROUND co-ordinates are the same as the BASIC PRINT AT. The third and fourth numbers of the BACKGROUND command are width and height of the square to be coloured. In the example the number 31 is the full screen width, and the number 6 means six character squares down. The number 5 is the colour cyan, and so the example given will 'paint' a cyan block at the top of the screen. In an example later on the same command will create the sky in a scene which will be created with LOGO commands.

The other new command in this issue is LIST. It will list to screen or printer a LOGO program. But, as I haven't yet explained how to create a LOGO program, you won't yet have anything to list!

Defining Logo Commands

LOGO programs are made by creating new commands from the commands that LOGO already understands. You can create a new command using DEFINE (DF). Most versions of LOGO use TO instead of DEFINE, but I've used the latter as it is more explanatory. You complete the DEFINE command with the new command name, which must be different from all the commands currently available to LOGO. As an example, let's tell the computer how to draw a box; we'll define a command called BOX. First enter the command:

DEFINE BOX (or DF BOX)

The screen will clear after the computer has checked that the command BOX doesn't already exist. You'll get the message 'DEFINE BOX' at the top of the screen, and the usual 'W' at the base of the screen.

There is no standard way of defining new commands in LOGO, there are probably as many different ways as there are versions of LOGO. So the instructions that follow just happen to be the way I have decided to allow the definition of new commands.

To define our box, enter the command:

RP 4 [FD 40 RT 90]

and press ENTER.

That line will appear at the top of the screen with a line number of zero. The line number is not used by LOGO, I've just added it to identify lines in case we want to make any changes. In any one definition you can enter up to 10 lines, but no line can be longer than 28 characters. For our BOX definition, all we need is the one line already entered, so we tell the computer we've

Fig 1 The program listing

```
  110 DATA 10,24,1
  140 DATA "LI",6100,"BG",6500
  240 DATA "LIST",6100,"BACKGROUN
D",6500
6100 REM   LIST
6105 IF def<1 THEN  RETURN
6110 PRINT #1;"LIST - To Screen
or Printer?"
6115 LET z$=INKEY$: IF z$="" THE
N  GO TO 6115
6120 IF z$="S" THEN  LET li=1: G
O TO 6200
6125 IF z$="P" THEN  LET li=2: G
O TO 6140
6130 GO TO 6115
6140 CLS : PRINT "Printer listin
g - please wait"
6145 OPEN #2,"p"
6150 FOR j=1 TO def: GO SUB 6300
6155 PRINT : NEXT j
6160 OPEN #2,"s": RETURN
6200 FOR j=1 TO def
6205 CLS : PRINT #1;"Please Wait
"
6210 GO SUB 6300
6215 IF INKEY$="" THEN  GO TO 62
15
6220 NEXT j: RETURN
6300 LET ed=j: GO SUB 5805
6305 LET y$=w$(j+n)
6310 PRINT "Definition - ";y$''
6315 GO SUB 5955: RETURN
6500 REM   BACKGROUND
6505 GO SUB 1200: IF err>0 THEN
 RETURN
6510 IF a<0 OR a>31 THEN  LET er
r=2: RETURN
6515 LET col=a
6520 GO SUB 1200: IF err>0 THEN
```

```
 RETURN
6525 IF a<0 OR a>21 THEN  LET er
r=2: RETURN
6530 LET row=a
6535 GO SUB 1200: IF err>0 THEN
 RETURN
6540 IF a<0 OR (a+col)>31 THEN
LET err=2: RETURN
6545 LET width=a
6550 GO SUB 1200: IF err>0 THEN
 RETURN
6555 IF a<0 OR (a+row)>21 THEN
LET err=2: RETURN
6560 LET height=a
6565 GO SUB 1200: IF err>0 THEN
 RETURN
6570 IF a<0 OR a>7 THEN  LET err
=2: RETURN
6575 FOR i=row TO row+height
6580 FOR j=col TO col+width
6585 LET at=22528+32*i+j
6590 LET ll=PEEK at
6595 LET ik=INT (ll/8): LET ll=l
l-8*ik
6600 POKE at,ll+8*a
6605 NEXT j: NEXT i
6610 RETURN
```

finished by entering ENO You'll get a message to tell you that the new command BOX has been stored. then you're back to a clean sheet of paper and the 'W' symbol. The LOGO program will now accept BOX as a command, try it!

You can include in your definitions already defined commands As an example, define another command PATTERN as follows

```
DEFINE PATTERN
RP 8[BOX RT 45]
END
```

When complete, enter PATTERN as a direct command, you'll get a pattern based on the BOX routine you defined Fig 2 contains another command called MOVE which also uses BOX Define the command as before, then enter MOVE as a direct command This definition uses several commands which were described in parts 1 and 2

Editing commands

The pattern created PATTERN wasn't particularly exciting, we could change PATTERN to improve it To do this we use the command EDIT The syntax is EDIT PATTERN Once you have entered this command, the computer will spend a few moments searching for PATTERN, then reformatting, ready for changes to be made The definition will reappear on the screen as you entered it (apart from END) At the bottom of the screen is a menu of editing options

- Option 1 is EDIT It will allow you to change a line Enter the line number of the line you wish to change and re-enter the line as you want it
- Option 2 INSERT allows you to insert another line between two lines of the screen Remember you cannot exceed a total of ten lines so you can insert a line if you have 9 lines or less in your definition If you opt to insert a line, say number two, then the previous line two becomes number 3, 3 becomes 4 and so on
- DELETE (option 3) allows you to delete a line
- REMOVE (option 4) will remove the whole definition Pressing 5 will return you to normal command ('W ')

```
DEFINE MOVE
PU XY 50 PD BOX
PU SX 120 PD BOX
PU SX 190 PD BOX
END
```

Fig 2 Definition of the command MOVE

So, to EDIT the command PATTERN you will want to change line zero Press 1 to get the EDIT option and press 0 to indicate that it is line 0 which you want to replace Then enter

```
RP 12 [BOX RT 30]
```

Press 5 to exit the edit routine, enter the direct command DRAW to clear the screen and reset the turtle then try PATTERN again

LOGO Structures

By now you should already have an idea of how programs are built up in LOGO Each definition should be quite independant you should check it out before moving on to the next definition This is structured programming It has the advantage of being easier to follow what is happening (than for example 'unstructured' BASIC), so it should be easier to correct any mistakes Programs written in this way are also much easier for others to understand The BBC machine's PROCEDURE and the QL's DEF PRO also allow programs to be structured in a similar way.

To start you off in LOGO programming fig 3 contains a listing obtained by the LIST command When entering a LOGO program, remember to enter one definition at a time (end each with END, which is not shown in the listing), then test it and edit as necessary before moving onto the next In the example program, notice that the command SCENE is the command which uses all the other commands in its definition It is the command which is central to the operation of the program, you operate the whole program (when it's all in the computer) by entering the direct command SCENE In this way LOGO differs from BASIC Its programs will not start with a single RUN command, they start with a defined command which is the 'core' of the program.

Fig 3 An example LOGO program

```
Definition - SKY

0  BG 0 0 31 5 5

Definition - SUN

0  PU XY 40 160 PC 6 PD

1  SX 42 PU XY 38 159 PD

2  SX 44 PU XY 37 158 PD

3  SX 45 PU XY 37 157 PD

4  SX 45 PU XY 38 156 PD

5  SX 44 PU XY 40 155 PD

6  SX 42 PU

Definition - GROUND

0  BG 0 6 31 14 4

Definition - HOUSE

0  BG 20 10 5 5 2

Definition - DOOR

0  BG 22 13 1 2 1
```

```
Definition - WINDOWS

Ø  BG 21 11 Ø Ø 7

1  BG 24 11 Ø Ø 7

Definition - ROOF

Ø  PU XY 160

1  96 PC Ø

2  PD SH 45 FD 33 RT 90 FD 33

Definition - SCENE

Ø  ØKY SUN

1  GROUND TREE

2  HOUSE ROOF DOOR WINDOWS

3  PU XY 200 160 SH 180

4  PD
```

```
Definition - TREE

Ø  PU XY ØØ 1ØØ PC Ø PD

1  SH 9Ø RP 8 [ FD 7 LT 45 ]

2  FD 2

3  RT 9Ø FD 3Ø LT 9Ø FD 1

4  LT 9Ø FD 3Ø RT 9Ø FD 1

5  RT 9Ø FD 3Ø
```

There is more to LOGO than the aspects I have covered in this series. LOGO also uses variables, it allows decision making with IF THEN ELSE structures, and it permits text handling. If you want to know more about LOGO there are several good book available (for example LOGO Programming by Peter Ross). Despite the limitations of my program, I hope you have gained an insight into the

fascinating possibilities that LOGO is able to offer as an introduction to programming to young and old, or simply, as an easy to use graphics creation package.

Light Screen Designer Part 3

Toni Baker completes the structure of our Spectrum graphics package, and describes the cursors generated by the program.

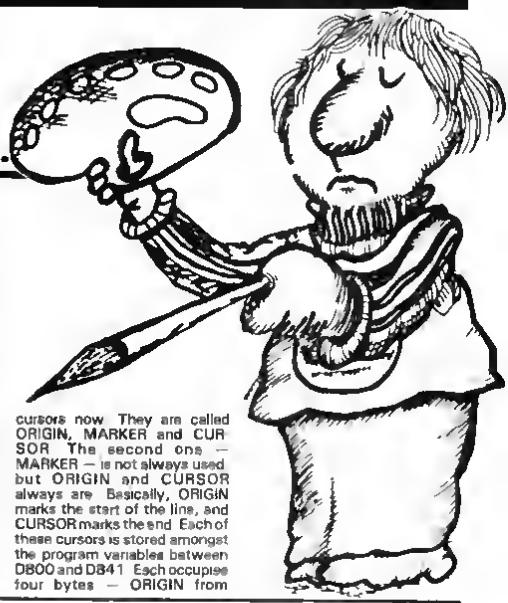

In this part of the series we tie up all the loose ends (and leave a few more in the process). Once you have part three, the program will be unified and even partially usable — no longer a fragmented assortment of meaningless subroutines. The building blocks we constructed in the first two parts will be drawn together (to become a foundation in whose structures should be evident) the organisation of the as yet, unfinished whole. We start off part three with two rather weird subroutines but we quickly progress to the initialisation and main loop of the program.

Cursor positions

As we explained earlier, cursor positions are held in four registers: B and C, which store the row and column numbers respectively and register pair HL which stores the address of the byte within the display file which contains the given pixel. These four bytes may be stored in memory in the order LHCB, so bytes one and two between them contain an address, byte three contains the column number, and byte four contains the row number. We also have the additional convention that byte four may contain the value FF — this is just a signal meaning "this cursor is not in use". The following subroutine is used to give initial values to some of the cursors. It performs the following task: *if* the cursor is not in use, *then* reset the cursor to co ordinates 0,0. It assumes that HL is already pointing to byte four.

Origin, marker and cursor

I'd like to introduce you to three cursors now. They are called ORIGIN, MARKER and CURSOR. The second one — MARKER — is not always used but ORIGIN and CURSOR always are. Basically, ORIGIN marks the start of the line, and CURSOR marks the end. Each of these cursors is stored amongst the program variables between D800 and D841. Each occupies four bytes — ORIGIN from

```
                        ORG DDA3
34          RES_CURSOR  INC (HL)          Is byte four FF?
200E                    JR NZ,RC_EXIT     Jump if not, restoring value of byte
2B                      DEC HL
2B                      DEC HL
2B                      DEC HL            Point to byte one
3600                    LD (HL) 00
23                      INC HL
3640                    LD (HL),40        Specify cursor address 4000h (top left hand
                                          corner of screen)
23                      INC HL
3600                    LD (HL),00        Specify column number zero
23                      INC HL
3601                    LD (HL),01        Specify row number zero (because of next
                                          instruction)
35          RC_EXIT     DEC (HL)
C9                      RET
```

Cursor initialisation subroutine

```
                        ORG DDB6
D5          DR_CURSORS  PUSH DE
21DCDB                  LD HL,ORIGIN        HL contains address of program variable named
                                            ORIGIN
0603                    LD B,03
C5          DCS_LOOP    PUSH BC
5E                      LD E,(HL)
23                      INC HL
56                      LD D,(HL)           DE = address of cursor within display file
23                      INC HL
4E                      LD C,(HL)           C = column number of cursor position
23                      INC HL
46                      LD B,(HL)           B = row number of cursor position
23                      INC HL              Point HL to next variable
78                      LD A,B              A = row number, or FF if cursor not in use
FEFF                    CP FF
2806                    JR Z,DCS_CONT       Jump if cursor not in use
E5                      PUSH HL
EB                      EX DE,HL            HL = address of cursor
CD6CDD                  CALL DD6C,DR_CURSOR Draw specified cursor
E1          DCS_CONT    POP HL              HL points to next variable
C1                      POP BC              B = loop count
10E9                    DJNZ DSC_LOOP
D1                      POP DE              Leave original DE unaltered
C9          RET
```

Routine to draw each of the three cursors ORIGIN, MARKER and CURSOR

DB0C to DB0F, MARKER from DB1D to DB13 and CURSOR from DB14 to DB17. This next subroutine draws each of the three cursors onto the screen (if they are in use) it relies upon the subroutine DR_CURSOR which was listed in part two

Calling the program

Now we come to the START of the program. The whole program may be run simply by calling the machine code from the START address. In hex, this address is DDD5, but by an absolutely astounding coincidence (what?) the START address in decimal is the highly memorable 56789. The BASIC instruction RANDOMIZE USR 56789 will call upon "Light Screen Designer" to do its work. To use this program you have nothing to remember except 56789. Got it?

In fact USR 56789 can be used for two entirely different reasons — to begin a picture, or to CONTINUE with a picture, since with this program you are free to hop back and forth between BASIC and machine code as much as you wish. Note that a BASIC CLS instruction is needed before a new picture is started.

The program distinguishes between the two different forms of start by quite an ingenious method. To BEGIN with, none of the cursors will be self-consistent (that is — if HL says one thing, BC will say another). Whereas, if a drawing is being continued then each cursor *will* be consistent.

The program uses a total of sixteen different cursors. Each of them occupies four bytes and each of them lives between DB00 and DB3F. Watch how the initialisation sequence works. You may find it helpful to look at at the top part of Figure One in order to follow the program through.

Complete program initialisation subroutine

```
                        ORG DDD5            (decimal 56789)
CDCCDC      START       CALL DCCC,MESSAGE
01                      DEFB 01             Print message "Light Screen Designer"
DD2140D8                LD IX,DB40          Initialise IX as required
CDBD16                  CALL 16BD,SET_MIN   Maximise spare RAM space
210DDB                  LD HL,ORIGIN2       Point HL to first program variable
0610                    LD B,10
C5                      PUSH BC
5E          LSD_LOOP    LD E,(HL)
23                      INC HL
56                      LD D,(HL)           DE = address of cursor, if assigned
23                      INC HL
4E                      LD C,(HL)           C = column number of cursor, if assigned
23                      INC HL
46                      LD B,(HL)           B = row number of cursor, if assigned
78                      LD A,B
FEB0                    CP B0
300A                    JR NC,LSD_RESET     Jump if row number out of range
E5                      PUSH HL
CD41DD                  CALL DD41,PIX_ADDR  HL = address corresponding to row and column
                                            numbers
A7                      AND A
ED52                    SBC HL,DE           Set zero flag if this address matches to the one
                                            given
E1                      POP HL              HL points to byte four of program variable
28D2                    JR Z,LSD_OK         Jump if cursor position is already assigned
36FF        LSD_RESET   LD (HL),FF          Signal "cursor not in use"
23          LSD_OK      INC HL              Point to byte one of next program variable
C1                      POP BC
10E3                    DJNZ LSD_LOOP       Repeat for all cursors
70                      LD (HL),B
23                      INC HL
70                      LD (HL),B           Reset (JFLAGS)
210FDB                  LD HL,ORIGIN+3      HL points to byte four of (ORIGIN)
CDA3DD                  CALL DDA3,RES_CURSOR Reset origin-cursor to 0,0 if not in use
2E17                    LD L,17             HL points to byte four of (CURSOR)
CDA3DD                  CALL DDA3,RES_CURSOR Reset main-cursor to 0,0 if not in use
```

```
CD8E02    LSD__READY    CALL KEY__SCAN        DE = immediate keyboard scan
78                      LD A,E                A = key code ignoring shift
FE20                    CP 20
20F8                    JR NZ,LSD__READY      Wait until "ESCAPE" key pressed
CD8E0D                  CALL 0D8E,CLS__LOWER  Clear lower part of screen to erase message
```

Main loop program

Now we come to the main loop program. If you take a look at Figure 1 you'll see I've drawn a flow diagram to show how it works. I don't often do flow diagrams but this was one of those rare exceptions where I did. If you follow the workings of the flow diagram you'll see that the cursors are only on the screen whilst waiting for a key to be pressed. Once a key is detected the cursors are erased before any further action is taken. One thing to watch out for though, is the fact that the keys do not repeat automatically. However, the "shift" key activates a repeat facility for the cursor keys only. Can you see how this is achieved?

"Shift" with any other key will result in the possibility of returning to BASIC. Incidently, don't worry about the copying the screen part — all will be revealed later on.

```
                        ORG DE1B
CD86DD    MAIN__LOOP    CALL DD86,DR__CURSORS  Draw cursors on screen
CD85DC                  CALL DC85 GET__CHR     DE = keyboard scan
CD86DD    MAIN__LOOP__2 CALL DD86 DR__CURSORS  Undraw cursors
2A14DB                  LD HL,(CURSOR)         HL = address of main-cursor
ED4B16DB                LD DE,(CURSOR + 2)     BC = co-ordinates of cursor
D5                      PUSH DE
78                      LD A,E                 A = key code ignoring shift
FE03                    CP 03
2853                    JR Z,CSR__DOWN         Jump is "cursor down" pressed
FE04                    CP 04
2840                    JR Z,CSR__LEFT         Jump if "cursor left" pressed
FE08                    CP 08
2845                    JR Z,CSR__UP           Jump if "cursor up" pressed
FE13                    CP 13
283D                    JR Z,CSR__RIGHT        Jump if "cursor right" pressed
DDCB0168                BIT 4,(IFLAGS)hrgh
2014                    JR NZ,ML__ACTION       Jump unless screen requires copying
210040                  LD HL,4000,D__FILE
11000C                  LD DE,C000,D__FILE__2
010018                  LD BC,1800
ED80                    LDIR                   Copy screen
21DCDB                  LD HL,DB0C,CURSOR
11DDDB                  LD DE,DB00,CURSOR__2
4D                      LD C,L                 Note BC = 000C
ED80                    LDIR                   Copy cursors
D1        ML__ACTION    POP DE                 DE = keyboard scan
2118DE                  LD HL,DE1B,MAIN__LOOP
E5                      PUSH HL                Force subroutine return address to be
                                               MAIN__LOOP
2142DB                  LD HL,DB42,CMD__ADDRS
14                      INC D
2803                    JR Z,ML__CASE          Jump unless "shift" pressed
E1                      POP HL                 Balance to stack
1838                    JR RET__BASIC          Prepare to return to BASIC
78        ML__CASE      LD A,E                 A = key code
87                      ADD A,A
85                      ADD A,L
6F                      LD L,A                 HL = points to subroutine address
4E                      LD C,(HL)
23                      INC HL
46                      LD B,(HL)              BC = subroutine address
C5                      PUSH BC                Stack = subroutine address
2A14DB                  LD HL,(CURSOR)         HL = main-cursor address
ED4B16DB                LD BC,(CURSOR + 2)     BC = main-cursor co-ordinates
C9                      RET                    Call required subroutine
CD13DD    CSR__LEFT     CALL DD13,LEFT__PIX    Move cursor left
1800                    JR CSR__STORE
CD1FDD    CSR__RIGHT    CALL DD1F,PIX__RIGHT   Move cursor right
1808                    JR CSR__STORE
CD29DD    CSR__DOWN     CALL DD29,DOWN__PIX    Move cursor down
1803                    JR CSR__STORE
CD36DD    CSR__UP       CALL DD36,UP__PIX      Move cursor up
3805      CSR__STORE    JR C,CSR__EXIT         Jump if cursor cannot move
2214DB                  LD (CURSOR),HL         Store new cursor position
ED4316DB                LD (CURSOR + 2),BC     Store new cursor co-ordinates
D1        CSR__EXIT     POP DE                 DE = keyboard scan
14                      INC D
2887                    JR Z,MAIN__LOOP        Loop back unless "shift" pressed
CD86DD                  CALL DD86,DR__CURSORS  Draw cursors on screen
76                      HALT
76                      HALT                   Wait for 1/25 of a second
CDC0DC                  CALL DCC0,GET__CHR__2  DE = keyboard scan
1883                    JR MAIN__LOOP__2       Loop back
```

Main program loop

Returning to BASIC

And now for the final piece of code for this issue. This is the RETURN TO BASIC part. It will ask you whether or not you wish to return to BASIC and will do so only if you reply "Y". (You may alternatively reply "N" or "escape".) Incidentally the RETURN TO BASIC option should in fact be available directly (without shift), just by pressing the "escape" button. To set this up, you should POKE address DB82 with A4, and address DB83 with DE. This effectively stores the address of an appropriate RETURN TO BASIC subroutine amongst the COMMAND ADDRESS table which runs between DB42 and DB8F.

The skeleton of the program is now complete. In the next part I shall start filling in some of the functions available.

```
                        ORG DE9E
CDA4DE   RET_BASIC      CALL DEA4,ESCAPE     Ask whether BASIC wanted
C31BDE                  JP DE1B,MAIN_LOOP    Jump back to main loop if not
CDCCDC   ESCAPE         CALL MESSAGE
12                      DEFB 12              Print message and await reply
FE59                    CP "Y"
CD                      RET NZ               Return unless reply was "Y"
F1                      POP AF               Empty the stack
C9                      RET                  Return to BASIC
```

Subroutine to detect and comply with a RETURN TO BASIC request

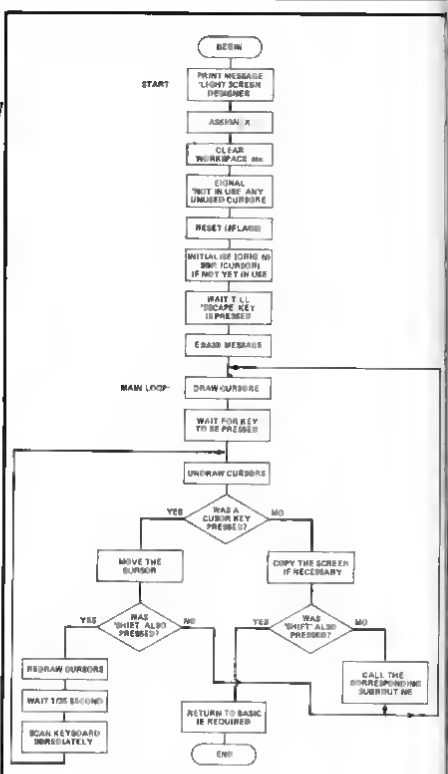

Figure 1. Flowchart describing initialisation procedures and main program loop

Block Delete

Stan Rodgers sent this routine all the way from Switzerland, and it's worth Yodelling about!

I was going to put this in the 'letters' section but then decided that although it's short it is a real masterpiece and deserves to be shown in all it's glory.

Stan was already working on this when we published Rodney Francis' version in the DEC/JAN issue, and he says that he thought that the version only did half the job, since the user still had to delete one line by hand. This routine deletes the block automatically and is shorter to boot!

A short machine code routine is set up in the printer buffer and this makes it suitable for both 16 and 48K machines, it functions as Stan explains:

> "It calls the monitor routine at 651Oh to get the address of the first line to be deleted and then again to get the address of the line following the last line to be deleted. These addresses are then passed to the monitor routine at 6629h which performs the necessary deletion"

Simple eh? especially if you're a genius. I have tried this and it is incredible, it is much, much faster than several block deletes used in some professional Toolkit programs I've tried!

Stan also has a few words to say on the IN function which has been causing mayhem. As you may know on using this the value of BIT 7 is 1, except on issue 3 Spectrums when it is usually (but not always) 0. This means the value returned as natural varies between 255 and 191. Stan says ' Strictly speaking only the 5 least significant bits are relevant when testing for a key in, so

```
LET X=IN 65022: LET
X=X-32 *INT (X/32)
```

and test for lower values which will be the same regardless of whichever machine is being used.

```
IF x=23 THEN
```

He asks why we didn't think of it, all I can say is "Of course, it's obvious really, I thought everyone would have realised excuse, waffle blush.

Anyway, over to Stan who will explain how to operate his Block Delete.

Stan Say's....

The routine shown in fig. 1 provides a simple, compact easy to use way of deleting blocks of source lines from a BASIC program. To use it, key in the program and SAVE it. Lines 4 to 6 comprise the loader and data necessary to create the machine code. Key in 'GOTO 4 ENTER' and the machine code is POKEd into memory locations 23300 onwards (this is in the PRINTER buffer). If the flashing message 'Checksum error' is displayed you have probably made a mistake in the DATA statement at line 6. Check it carefully, correct the error and key in 'GOTO 4 ENTER' again. When correct, the message "DELETE loaded" comes.

Now you can test the routine. Key in 'GOTO 1 ENTER' and the routine requests the line number at which you want to start to delete. Key in '4 ENTER' and the routine will ask for the line number up to which you want to delete. Key in '6 ENTER' and the routine will delete lines 4 to 6.

You can now save the BASIC and m-c with the commands:

```
SAVE "delete

end

SAVE "deletecode" CODE
mem,20
```

Now you have a routine which occupies only lines 1 to 3 of a BASIC program. To use it, make sure there are no lines 1, 2 or 3 in the program you want to edit. Key in:

```
MERGE "delete"
```

and the three lines of the BASIC routine are merged with your program. Now key in 'GOTO 3 ENTER' to load the machine code. The routine will ask you which lines are to be deleted as already described.

There is no restriction on the line numbers which you enter except that they must satisfy the tests in line 1. If you give a non-existent line as the start line, deleting will commence with the next valid line. If the last line number you give does not exist, deletion will include the last line before this number. This is the most compact way of using the routine. However, if you don't mind using more than three lines, you can do the following: Delete line 3. Change line 5 to 'GOTO 1'. Now the routine will initialise itself when you MERGE it and key in 'GOTO 4 ENTER'.

Fig 1 BASIC Block Delete routine and loader

```
   1 INPUT "Delete from line ";f
;" to line ";t: IF f<3 OR t>9999
 OR f>t THEN  GO TO 1
   2 POKE 23296,f-256*INT (f/256
): POKE 23297,INT (f/256): POKE
23298,t-256*INT (t/256): POKE 23
299,INT (t/256): RANDOMIZE USR m
em: STOP
   3 LET mem=23300: LOAD "delete
code"CODE mem,22: GO TO 1
   4 LET mem=23300: LET cs=0: RE
STORE 6: FOR i=0 TO 18: READ v:
POKE (mem+i),v: LET cs=cs+v: NEX
T i: READ csv: IF csv<>cs THEN
PRINT  FLASH 1;"Checksum error":
 STOP
   5 PRINT "Delete is loaded": S
TOP
   6 DATA 42,0,91,205,110,25,229
,42,2,91,33,205,110,25,209,205,2
29,25,201,201
```

Fig 2 Source-code/Machine-code disassembly for Block Delete

```
5B00  2A005B    LD HL,(5B00)
5B03  CD6E19    CALL 196E
5B06  E5        PUSH HL
5B07  2A025B    LD HL,(5B02)
5B0A  23        INC HL
5B0B  CD6E19    CALL 196E
5B0E  D1        POP DE
5B0F  CDE519    CALL 19E5
5B12  C9        RET
```

NOW READ THIS!

It's your chance to become a programmer for a friendly, dynamic new company!

We are currently looking for additional programmers (and games) to add to our team.

The benefits include, the chance to work on a wide range of projects, the chance to pass opinions and present suggestions on other ideas within the company, financial help with equipment, and, of course, an excellent royalty rate.

(Your chances will be improved if you can send us examples of any of your programming. If sending us games please give a brief description of the object of the game, time taken to program and any other information you may feel to be relevant. As well as a cassette, of course.)

Please apply in writing only to
LISA VALLMER

THE PROGRAM BUREAU
Chesham House, 136 Regent Street, London W.1

Here be dragons

Some pointers on how to produce that adventurous masterpiece from Glaswegian demon-destroyer, Brian J. Robb.

Adventure games are often most difficult to write. It is relatively easy to write a simple arcade type game where you are only concerned with trying to get your 'space invader' to do what you want it to do. With an adventure program you are dealing with people. Your program must appear intelligent and be user friendly. It has to be able to cope with all sorts of input from a frustrated adventurer.

There are several ways of writing an adventure program but they all begin the same. The programmer must have a good idea for an adventure and a plan. This is often the most difficult part of the whole process. The best place to get ideas is from a wide range of source material. This mainly consists of Science Fiction and Fantasy books. The most widely used are those by Tolkein, but there is a wide range of books which can offer ideas.

There are other authors which are rarely touched such as Issac Asimov, H P Lovecraft and Tanith Lee. Many of the books from these and other authors can provide brilliant ideas for adventure scenarios.

Be seeing you...

Another more widely used source are television programmes and films. T.V. programmes such as The Prisoner and Doctor Who are good starting points to collect ideas. Many films both in the cinema and on Video release, are good sources of inspiration. Films such as Krull, Dark Crystal and Science Fiction epics such as Return of the Jedi provide ideas for events and locations within your own adventures.

Magazine advertisments also provide ideas. The graphics displayed in an advert can spark off ideas for locations and characters within an adventure. The blurb itself describing adventure games can provide ideas. If a game is for a computer other than your own, then based on descriptions in adverts and reviews in computer magazines you can create a scenario for your own version of the game.

The majority of ideas come, not from only one source, but a mixture of all those mentioned. If you note down ideas for a while one day you may find you have several which fit together well to create an adventure scenario.

Mapping your Scenario

Once you have your scenario worked out than it's time to draw a map. Maps are an important part of adventure game writing because they provide an idea of where each location is not just an abstract thought but a solid visual representation of your fantasy land.

When the map is finished you must stock it with items, monsters and characters. On your map list the items to be found there and any monsters which may be lurking in the shadows. You should also list any special conditions to be met before a monster can be killed or and item collected. All this is shown in figure 1.

Only when all this has been done should the computer keyboard be approached. It is very tempting to begin programming as soon as you have an idea, without any planning, but all this will result in is a bug filled shambles of a program.

An adventure program can be put together as a series of interlocking 'modules' making it easier to trace bugs. A list of variables to be used throughout the program should be made and the variables should be initiated at the very beginning of the program. This makes up one module. The second module should contain the instructions for the game. The variables are shown in figure 2.

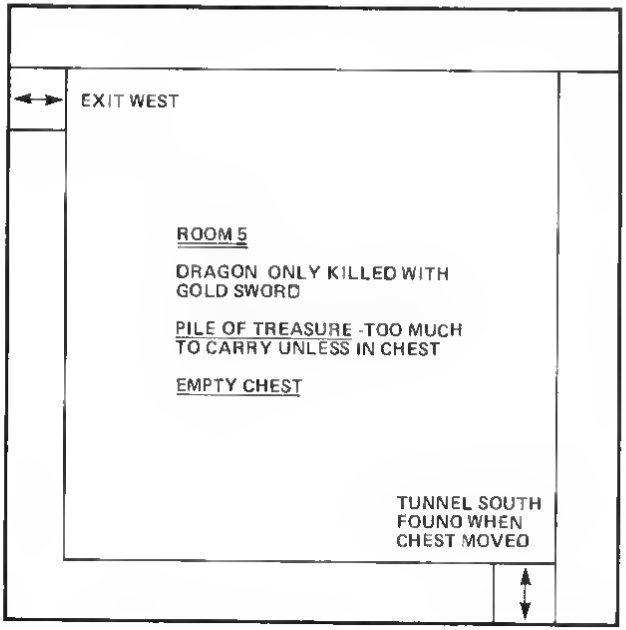

Figure 1 Mapping your adventure

```
10 LET S=0 This is the characters strength
20 LET IQ=100 This is his wisdom/intelligence
30 LET M=0 This is his magic ability
40 LET TR=0 The value of treasure carried
50 LET A$=' What Now?'' A typical response
60 LET L=0 The location number
70 LET N=0 The number of items carried
```

Figure 2 Setting up the variables

```
300 REM MONTERS
310 IF M=1 THEN GOSUB 6000
315 IF M=2 THEN GOSUB 6010
Etc ,
6000 PRINT ''YOU SEE A DRAGON''
6006 RETURN
6010 PRINT ''YOU SEE A ZOMBIE''
6015 RETURN
Etc ,
```

Figure 3 Monster descriptions without READ and 'DATA

```
600 REM TAKING
610 PRINT ''WHAT DO YOU WISH TO TAKE?''
620 LET N=N+1
630 INPUT LS(N)
640 IF N =5 THEN PRINT ''YOU ARE CARRYING TOO
MUCH DROP AN ITEM.'
650 PRINT 'YOU MAY CONTINUE'
660 GOTO 1000
```

Figure 4 A brain routine to TAKE

line 1000 is the location of the general input routine. This module is for the ZX-81 but is easily converted to other micros

```
200 REM LOCATIONS
210 IF L=1 THEN GOSUB 5000 (Where L is the location
Number )
220 IF L=2 THEN GOSUB 5010
230 IF L=3 ETC
5000 PRINT 'YOU ARE IN A DEEP PIT, FILLED WITH SNAKES''
5005 RETURN
5010 PRINT ''YOU ARE IN A FOREST WITH EXOTIC BIRDS''
5015 RETURN ETC
```

Figure 5 Location descriptions without READ and DATA

Main Module

Then follows the main module a control program or 'brain'. This module has to collect the location descriptions from the main body of the program. A large number of computers do this using READ, DATA loops, but the ZX-81, does not have this feature. Figure 3 shows a way to get round this problem.

The brain module contains all the routines likely to be used many times during a game. This would include routines such as GET, TAKE, DROP, FIGHT, RUN, REST, HELP and USE. As your adventure grows so too can the program's vocabulary and 'brain'.

Once you have your variables set up, the many brain routines and the location descriptions laid down you have to make your player-character mortal. A variable will have been set up to contain your character's strength or life points. During the program this should be decreasing until it reaches zero when the player-character is dead. The player's strength or life points can be increased by eating food along the way or by using potions and magic.

Example Routine

Figure 4 shows a 'brain' routine for use with the ZX-81, but this is easily converted to other micros. Figure 5 shows a routine for finding locations without the need for READ and DATA statements. Figure 6 is a table showing the structure of the completed adventure.

When you have finished programming you should have an adequate adventure to baffle your friends for a while. If the task set or aim to be achieved is difficult enough your players should be occupied for quite a while. That is a sure sign that your program has succeeded.

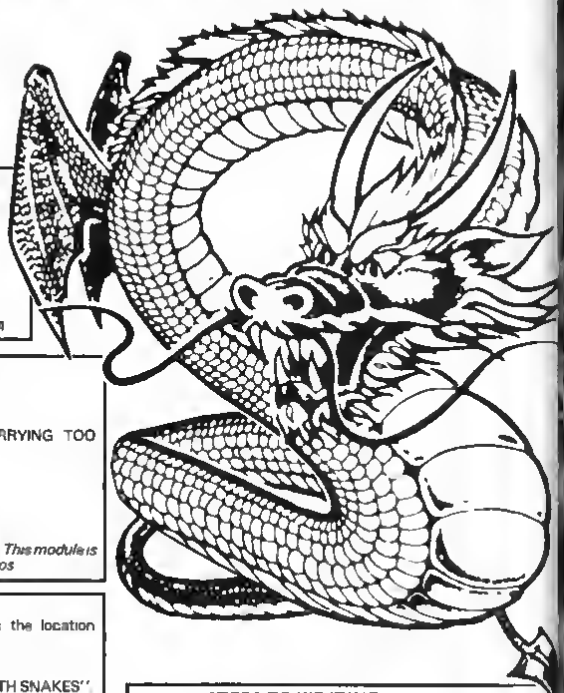

STEPS TO WRITING

1. CREATE A SENARIO
2. MAPPING
3. PROGRAMMING

PROGRAM STRUCTURE

1. SET UP VARIABLES
2. INSTRUCTIONS
3. MAIN 'BRAIN'
4. LOCATIONS
5. MONSTER DESCRIPTIONS

Figure 6 The general structure of a program

MIND GAMES

AMERICAN FOOTBALL

A fast & furious graphics strategic simulation

£9.99
FREE RULE BOOK

FOR THE SPECTRUM 48K, CBM 64

THER GREAT MIND GAMES:

Starring The Overlords of the Universe The candidate (you) have to get to the Chamber of Creation It's a laugh a minute since it's 2,000 light years away on the most horrible planet in the Universe and your warp drive doesn't work, either!

A fun feature adventure starring well known nasty aliens the Zarps Can you play the hero and stop their plans to blow up the earth

Starring The Zurgs After a desperate space battle only one fleet of heroes remain to prevent the invasion of earth The future of humanity lies with you!

Argus Press Software Group

For mailorder write with cheque/PO (card No. to Mind Games, Argus Press Software Group No 1 Golden Square London W1A 3AB.

Moving Graphics On The QL

Drive a racing car around the screen in this fast-moving game from Tim Hartnell, which demonstrates how effectively SuperBASIC can be used for moving graphics.

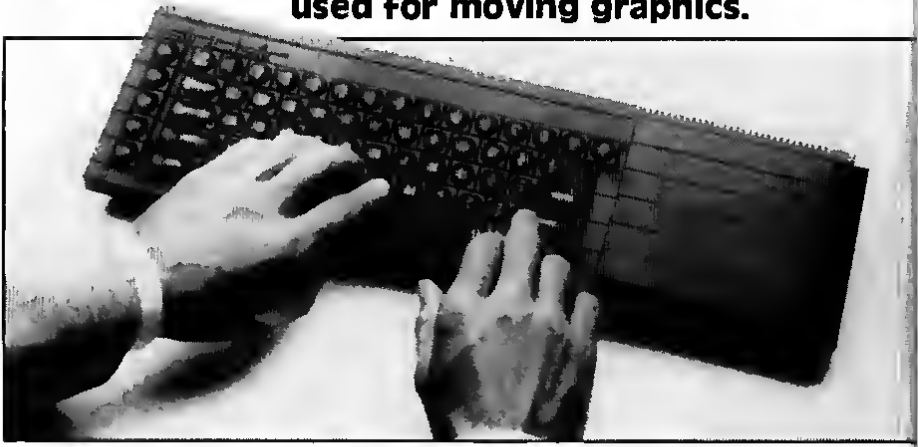

Drive a racing car around the screen in this fast-moving game from Tim Hartnell, which demonstrates how effectively SuperBASIC can be used for moving graphics.

Although the speed of the QL has been criticised, it is still possible to produce highly satisfactory moving graphics programs as you'll see when you run this program.

In QL RACER you drive a little racing car (which looks remarkably like an arrow) around a race track. You'll discover that the game, although it starts off running fairly slowly, is almost impossible to play. If you manage to get around the track once without crashing, it will speed up, and will continue to increase its speed for twenty games.

The program, which comes from my book *Tim Hartnell's QL Games Compendium* (Interface Publications, £5.95), makes the most of a number of features which are unique to the QL, such as the real-time clock.

You travel from the top left hand corner round the course clockwise, then up the left hand edge to your starting position, where you'll be given a new car. You must avoid all the edges to stay in the race. Your score is related to how long you manage to keep the car in action, and also to the 'difficulty level' which is set at the start of a game.

As I pointed out, the real-time clock is used in this program. The QL's internal clock is used to give a readout which shows how long you have survived. The clock, and the score, is updated using the procedure defined in lines 470 to 560.

```
10 REMark QL Racer
20   high_score=0
30   difficulty=21
40 REPeat cycle
50   initialise
60    REPeat race
70    increment_score
80     read_keyboard
90     erase_old_car
100     check_if_smash
110      IF smash=1 THEN EXIT race
120     place_new_car
130     BEEP 1000,RND(240 TO 250)
140    FOR delay=1 TO difficulty
150    END FOR delay
160    END REPeat race
170 REMark ---------------
180 REMark Smash sequence
190 FOR j=1 TO 70
200 AT car_down,car_across
210 INK RND(1 TO 7)
220 PRINT "X"
230 BEEP 10,RND(1 TO 20)
240 AT car_down,car_across
250 PRINT "+"
260 BEEP 10,RND(40 TO 70)
270 AT car_down,car_across
280 PRINT CHR$(254)
290 END FOR j
300 AT 0,0
```

```
310 STRIP 1:INK 7:PAPER 1
320 FLASH 1
330 PRINT "Your score is ";score
340 IF score>high_score THEN
350  high_score=score
360 END IF
370 AT 18,16
380 PAPER 2
390 PRINT "High score is ";high_score
400 FLASH 0
410 FOR y=1 TO 100
420   BEEP 50,y
430   BEEP 70,200-2*y
440 END FOR y
450 END REPeat cycle
460 REMark ------------------
470 DEFine PROCedure increment_score
480  score=score+1 
490 AT 1,32
500 PRINT score
510 get$=DATE$
520 INK 7:PAPER 2
530 AT 9,5
540 PRINT get$(16 TO 20)
550 PAPER 0
560 END DEFine increment_score
570 REMark ------------------
580 DEFine PROCedure place_new_car
590 INK 6
600 AT car_down,car_across
610   PRINT car$
620 END DEFine place_new_car
630 REMark ----------------
640 DEFine PROCedure check_if_smash
650 smash=c(car_down,car_across)
660 END DEFine check_if_smash
670 REMark --------------
680 DEFine PROCedure erase_old_car
690 AT erase_down,erase_across
700 PRINT " "
710 END DEFine erase_old_car
720 REMark ---------------
730 DEFine PROCedure read_keyboard
740 erase_across=car_across
750 erase_down=car_down
760 new$=INKEY$
770 IF new$="" THEN new$=old$
780 IF new$=CHR$(192) THEN
790  car_across=car_across-1
800  car$=CHR$(188)
810 END IF
820 IF new$=CHR$(200) THEN
830  car_across=car_across+1
840  car$=CHR$(189)
850 END IF
860 IF new$=CHR$(208) THEN
870  car_down=car_down-1
880  car$=CHR$(190)
890 END IF
900 IF new$=CHR$(216) THEN
910  car_down=car_down+1
920  car$=CHR$(191)
930 END IF
940 old$=new$
950 END DEFine read_keyboard
960 REMark ---------------
970 DEFine PROCedure initialise
980 PAPER 0:INK 3:BORDER 4,2
990 CLS:CLS #0
1000  score=0
1010 IF difficulty>1 THEN difficulty=difficulty-1
1020 PAPER 7:INK 2
1030 AT 0,30:PRINT "Score:"
1040 AT 4,32:PRINT " ";difficulty;" "
1050 DIM a(233),b(233),c(20,30)
1060 REMark Build racetrack
1070 PAPER 6:INK 4
1080 CSIZE 2,0
1090 RESTORE
1100 FOR j=1 TO 233
1110  READ a(j),b(j)
1120  c(a(j),b(j))=1
1130 AT a(j),b(j)
1140 PRINT CHR$(254)
1150 END FOR j
1160 PAPER 1
1170 FOR j=1 TO 29
1180 READ x,y
1190 AT x,y
1200 INK RND(2 TO 7)
1210 PRINT CHR$(253);:BEEP 100,5*j
1220 END FOR j
1230 REMark Place car
1240 car_across=3:car_down=3
1250 erase_across=car_across
1260 erase_down=car_down
1270 old$=CHR$(200)
1280 smash=0
1290 PAPER 0:INK 6
1300 FOR y=1 TO 50:BEEP 100,y
1310 SDATE 1984,7,3,0,0,0
1320 END DEFine initialise
1330 REMark --------------
1340 REMark Track data
1350 DATA 1,4,1,5,1,6,1,7,1,8,1,9,1,10,1,11
1360 DATA 1,20,1,21,1,22,1,23,1,24,1,25,1,26
1370 DATA 1,27,1,28,1,29
1380 DATA 2,2,2,3,2,4,2,11,2,12
1390 DATA 2,18,2,19,2,20,2,29,2,30
1400 DATA 3,1,3,2,3,12,3,16,3,17,3,18,3,30
1410 DATA 4,1,4,6,4,7,4,8,4,12,4,13
1420 DATA 4,16,4,23,4,24,4,25,4,26,4,30
1430 DATA 5,1,5,4,5,5,5,6,5,7,5,8,5,9
1440 DATA 5,13,5,14,5,15,5,16,5,21,5,22
1450 DATA 5,23,5,26,5,27,5,30
1460 DATA 6,1,6,4,6,9,6,19,6,20,6,21
1470 DATA 6,22,6,23,6,24,6,25,6,26,6,30
1480 DATA 7,1,7,4,7,9,7,10,7,19,7,20
1490 DATA 7,21,7,22,7,30
1500 DATA 8,1,8,4,8,10,8,11,8,12,8,13,8,14
1510 DATA 8,15,8,16,8,17,8,18,8,19
1520 DATA 8,28,8,28,8,29,8,30
1530 DATA 9,1,9,4,9,10,9,11,9,12,9,13
1540 DATA 9,14,9,15,9,16,9,17,9,18
1550 DATA 9,24,9,25,9,26,9,27,9,28,9,29
1560 DATA 10,1,10,4,10,11,10,18,10,19
1570 DATA 10,20,10,23.10,24
1580 DATA 11,1,11,4,11,5,11,6,11,7,11,8
1590 DATA 11,11,11,19,11,20,11,24,11,25
1600 DATA 11,26,11,27,11,28,11,29
1610 DATA 12,1,12,7,12,8,12,9,12,10,12,11
1620 DATA 12,14,12,15,12,19,12,20,12,21
1630 DATA 12,28,12,29
1640 DATA 13,1,13,10,13,11,13,14,13,15,13,16
1650 DATA 13,19,13,20,13,21,13,22
1660 DATA 13,29,13,30
1670 DATA 14,1,14,2,14,6,14,10,14,11
1680 DATA 14,15,14,16,14,19,14,20,14,22
1690 DATA 14,23,14,24,14,25,14,26,14,30
1700 DATA 15,2,15,4,15,5,15,6,15,7,15,10
1710 DATA 15,11,15,12,15,15,15,16
1720 DATA 15,20,15,21,15,22,15,23,15,24
1730 DATA 15,25,15,29,15,30
1740 DATA 16,2,16,3,16,4,16,7
1750 DATA 16,15,16,16,16,17,16,28,16,29
1760 DATA 17,7,17,8,17,14,17,15
1770 DATA 17,17,17,18,17,20
1780 DATA 18,8,18,9,18,10,18,11,18,12,18,13
1790 DATA 18,14,18,18,18,19,18,20
1800 DATA 18,21,18,22,18,23,18,24
1810 DATA 18,25,18,26,18,27,18,28
1820 DATA 19,21,7,7,9,5,6,5,7,8
1830 DATA 10,9,7,5,11,10,6,6
1840 DATA 9,6,5,25,6,8,9,7
1850 DATA 10,7,6,7,5,24,7,6
1860 DATA 7,8,11,9,8,5,10,10
1870 DATA 8,6,10,8,8,7,10,6
1880 DATA 6,8,8,9,10,5,9,9
```

Tower of Hanoi

Kenneth Baker of Southampton has written the ultimate version of this game in machine code for the 16K ZX81.

Invented about 100 years ago by the French mathematician Edouard Lucas, The Tower of Hanoi is perhaps the most fascinating and enduring of all puzzles. The object is to transfer the six parts of the Tower from position 'A' to position 'C' in the least possible moves, and without ever placing a larger block upon a smaller one. Position 'B' is used throughout as a temporary store.

To transfer a block from 'A' to 'B', simply input AB. If the move is valid the transfer will be made, and the score incremented by 1. The program is designed to reject any illegal moves.

In this six-tier version of the puzzle the least possible moves is 63, and the maximum allowed is 99 — when the computer will decide that the player is doing so badly that it will automatically call a restart to the program. Restart can be called at any time by pressing 'R', and the only other active key, apart from the transfer keys ABC, is 'F', which will clear the program from memory.

To put the player on the right track, the first few moves are AB, AC, BC, but to say more might be to deprive the player of hours of hair-teering frustration.

At the end of each game a caption containing a suitable comment as to the status of the final score will appear on the screen. Please remember that the least possible moves is 63.

The program is written entirely in Machine Code, which must be entered most carefully. The code is arranged in 139 lines of 11 HEX pairs, the first nine pairs representing the actual code, whilst the last two contain a checksum which is an addition of the code values in the line plus the line number. In this way, if any line should contain an error, or even if the wrong line is entered by mistake, it will be rejected with a request for the line to be re-entered.

Each line of 11 pairs should be entered together as a string, with one space between each pair. It should be noted, particularly if any other method of input is used, that the last two pairs are NOT instructions.

Making Space

The biggest problem with entering large Machine Code routines into the ZX81 is being able to create large enough REM statements in order to store them. The method chosen here is to form a REM statement of 120 characters in Line 4, and duplicating it 9 times in Lines 5-13 by the following method:

4 REM xxxxx(120 characters) xxxxx
EDIT
Change the Line No. to 5
Press N/L
EDIT
Change the Line No. to 6, and so on, until Line 13 is reached.

The size of Line 4 is then adjusted to encompass the 9 ensuing lines, which will result in a REM statement with the required number of 1254 bytes. When a REM statement is created in this way, it is most important to stabilize it with the addition of at least one line afterwards — hence the apparently redundant REM in Line 14 of the program, which must be left intact when the HEX LOADER is deleted.

Purely by the way, should you wish to use this technique in your own programs, the number of bytes per number of lines can be found by using the formula ((C+6)/L)-6 where C= the total characters required and L= the number of lines. To avoid fractional answers, the odd byte or two can be added to the total characters. The best way to determine the number of lines is to factorize (C+6) again adding the odd byte until a convenient balance is reached. The length of the first line is then poked with (C+2).

```
  1 REM
  2 GLOW
  3 RAND USR 16731
  4 REM THIS LINE CONTAINS THE
    MACHINE CODE. READ TEXT
    BEFORE ENTERING THE
    PROGRAM
 14 REM
 15 POKE 16541,232
 16 POKE 16542,4
 17 LET Z=16544
 18 LET V=28
 19 FOR N=1 TO 139
 20 LET T=N
 21 LET C=1
 22 DIM A$(33)
 23 DIM A(9)
 24 PRINT AT 18,0;"INPUT LINE N
O. ";N
 25 INPUT A$
 26 FOR M=1 TO 25 STEP 3
 27 GOSUB 50
 28 LET A(C)=P
 29 LET T=T+P
 30 LET C=C+1
 31 NEXT M
 32 GOSUB 50
 33 LET Q=P
 34 LET M=M+3
 35 GOSUB 50
 36 LET P=256*Q+P
 37 IF NOT P=T THEN GOTO 39
 38 GOTO 43
 39 PRINT AT 18,8;"ERROR IN LIN
E ";N;AT 19,8;"PLEASE RE-ENTER"
 40 PAUSE 180
 41 CLS
 42 GOTO 28
 43 FOR M=1 TO 9
 44 POKE Z,A(M)
 45 LET Z=Z+1
 46 NEXT M
 47 NEXT N
 48 PRINT AT 18,0;"ALL CORRECT"
 49 GOTO 54
 50 LET I=CODE A$(M)-V
 51 LET F=CODE A$(M+1)-V
 52 LET P=16*I+F
 53 RETURN
 54 PAUSE 100
 55 CLEAR
```

When the code has been successfully entered, lines 15 to 55 can be removed, and the final instruction, before saving and running the program, is to POKE 16543,127 this will make the REM statement invisible, but can be omitted if my flair for cosmetic surgery is not to your taste.

ZX-81 OWNERS

AT LAST THE PROGRAM YOU'VE BEEN WAITING FOR!

Rocket Man

Coming Soon! SPECTRUM VERSION

with Hi-Res Graphics on standard ZX-81 16K

Actual ZX-81 Screen Display!

1 Diamonds
2 Sea
3 Platforms
4 Ladders
5 Fuel Cans
6 Rocket
7 Vulture
8 Leg of Lamb
9 Player
10 Bubloid
11 Fuel Gauge
12 Men Remaining

Get rich quick by collecting Diamonds that are simply lying there waiting for you!

Oh I forgot to mention that there are one or two problems! There is an expanse of Shark infested water between you and the Diamonds and a strange breed of Bubble that seems hell bent on getting you in it! Somehow you must cross it

You have a Rocket Pac to help you (a Vulture on higher levels) but you must rush around the platforms and ladders collecting cans of fuel (legs of lamb with the Vulture) and cursing that weird Bubble Once you have enough fuel then it's Chocks Away!

Oh but don't run out of fuel on the way – otherwise it's SPLASH!

The aim is to collect all the diamonds from the far left hand side of the screen whilst avoiding the rampant Bubloid These emerge from the sea and are hell bent on returning to their watery habitat with you in tow Sooner or later you are going to end up in the drink The idea is to make it later!

By belting round the system of platforms and ladders cleverly avoiding the Bubloid you collect the fuel cans which appear in random positions until you consider that your fuel gauge indicates sufficient in the tank Now you can go and collect your rocket With the rocket pack strapped to your back you can fly across the expanse of sea to collect the diamonds but don't run out of fuel or your rocket pack will simply disappear and you will wind up in the drink!

There are six stages with six different platform layouts On stages 1 3 the Bubloid which floats in front of the platforms with uncanny ease gets an ever increasing ability to home in on your position making the task of staying alive more demanding with each stage On stages 4 6 you once again start with the easiest Bubloid (which is a blessed relief!) but the fuel cans are replaced by legs of lamb which you must collect to feed your vulture and once it has enough energy (or you think it has!) you must flap across the water on its back to collect the diamonds

Extra men are awarded for every 10 000 points – but ONLY once you have collected all the diamonds and so completed each particular stage

GOOD LUCK!

Available from all good computer shops or send cheque/P.O. for £5.95 (inc P&P) to:

Software Farm, FREEPOST (no stamp required) (BS3658) , BS8 2YY

Software Farm, 155 Whiteladies Road Clifton Bristol BS8 2RF
Telephone (0272) 731411 Telex 444742 AFMADV G

Pot Shot

Indulge in a little 'fowl-play' and avoid the gamekeeper with F A Slade's Pot Shot.

A simple but nonetheless entertaining game presented in two forms. Firstly a BASIC listing which plays perfectly adequately and then for comperative purposes try the Machine code version. The Basic program is entered as read

To enter the machine code program enter listing 1, not forgetting the 356 dots in 1 REM, and RUN it

Input each of the numbers in each line one at a time, the sixth number is a check and any errors will be trapped and you will be asked to re-enter an incorrect line.

Once all the numbers have been entered you may delete all the lines except 1 REM or leave them, the choice is yours. Enter the Machine code driver lines then SAVE your program. Although the code is checked on entry there is still a slight chance of error.

For further details I hand you over to Mr Slade -

This game was originally written in machine-code for the younger members of the family. However, I have endeavoured to produce a reasonably accurate representation in BASIC. Any key may be pressed to fire the bullets.

The object is simply to score as many points with your limited ammunition, as possible. Set two or more six year olds off on a competition and they will play for ages!

```
  10 CLS
  20 DIM A$(3,32)
  25 FOR I=1 TO 6
  26 LET A$(1,(I-1)*5+1 TO )=" "
+CHR$ 129+" "+CHR$ 4
  27 LET A$(2,I*5-2)=CHR$ 128
  28 NEXT I
  50 PRINT AT 1,0;A$(1, TO );A$(
2, TO );A$(3, TO );" ";A$(1, TO
31);" ";A$(2, TO 31);A$(3, TO );
"  ";A$(1, TO 30);"  ";A$(2, TO
30)
  60 LET A=PEEK 16396+256*PEEK
16397)+775
  70 POKE A,128
  80 POKE (A-33),135
  90 POKE (A+1),5
 110 POKE 16514,0
 120 POKE 16515,0
 130 POKE 16516,0
 140 LET A=USR 16000
 150 LET A=PEEK 16515
 160 CLS
 170 PRINT AT 5,5;" YOUR SCORE =
 ";A;AT 6,5;"----------------";
AT 15,5;"  ANOTHER GAME (Y/N) ?"
 180 LET B$=INKEY$
 190 IF B$="" THEN GOTO 180
 200 IF B$="Y" THEN GOTO 10
 210 STOP
```

Machine code driver

Program Description

Lines	
20-80	Set up the array A$ for the ducks
90-110	The variables A for the control of the bullet position loop B for the number of bullets fired C for the score D for the moving of the ducks E for the position of the base
120	POKEs the base into position (Using D/FILE)
130	Prints the ducks each loop
140	Adds 1 to D to move the ducks
150	Checks D for restarting print position
160 170	checks if bullet fired or key pressed
180	Checks no bullets to end game (May be changed)
190-240	Prints score and asks if another game required
250	Start of bullet fired/print loop
260	Adds bullets fired if loop just started
270	Clears old bullet prints new bullet
280	If bullet is not near ducks, jumps past hit routine
290 300	Checks if hit head or body or nothing
325-330	Increments bullet position or resets to 0
340-370	Hit duck clears A$ of duck (340-360)prints splat (362-368), increases score (370)
380	Resets A for hit (head or body)
385 390	Delay loop
395	Clears bullet for hit body



```
   1 REM ..(356 characters)..
 300 FOR I=16514 TO 16073 STEP 6
 305 LET Y=0
 309 CLS
 310 FOR J=0 TO 5
 320 INPUT X
 322 PRINT X;" ";
 330 POKE I+J,X
 340 LET Y=Y+X
 350 NEXT J
 352 INPUT Z
 353 PRINT Z
 354 IF Y<>Z THEN PRINT "ERROR R
E-ENTER LINE."
 355 FOR K=1 TO 50
 357 NEXT K
 360 IF Y<>Z THEN GOTO 305
 370 NEXT I
```

Listing 1. Machine code loader

Machine Code

The machine code is held from 16514 to 16869 and requires a REM to hold the instructions. These numbers are POKEd into their correct addresses. The speed of the game is controlled by a delay loop from 16795 to 16807. 16797 and 16799 may be POKEd with different values to change the speed of

the game. 16816 contains the number of bullets that can be fired and again this may be changed up to a maximum of 255

The Basic Driver

Lines
- 20-40 — Set up A$ (for ducks)
- 50 — Prints the ducks
- 60-90 — POKEs the gun into position
- 110-130 — Resets score etc. for machine code routines
- 140 — Calls machine code routines
- 150 — PEEKs score
- 160-200 — Prints score and asks for another game

The two graphics characters used in A$ (1 TO) are CHR$ 128 and CHR$ 4 and in A$ (2 TO) the graphics character is CHR$ 128

Decimal machine code dump

0	7	10	42	12	64	135
1	16	0	9	54	0	80
1	18	0	9	30	8	66
68	77	3	126	58	130	454
64	22	31	10	119	35	281
3	21	32	249	0	58	363
130	64	119	35	35	29	412
32	230	42	12	64	1	381
48	0	9	22	8	68	155
77	3	126	254	27	40	527
0	1	33	0	9	21	72
32	241	201	10	254	129	867
40	0	254	8	40	37	379
54	0	24	235	54	0	367
229	35	54	8	35	35	388
54	8	1	32	0	9	96
54	0	62	2	130	95	343
58	131	64	131	50	131	565
64	205	2a	65	225	24	609
202	54	0	229	35	54	574
27	24	245	58	37	64	455
254	255	40	21	42	12	624
64	1	164	2	9	126	366
254	27	40	9	54	27	411
58	132	64	60	58	132	496
64	201	1	220	255	9	750
229	54	23	35	54	56	451
35	54	53	35	54	49	280
35	54	38	35	54	57	273
35	54	23	205	155	65	537
205	155	65	62	7	225	719
54	0	35	61	32	250	432
201	148	71	1	42	12	475
64	1	49	0	9	34	157
67	65	62	20	58	69	333
65	42	67	65	126	254	619
27	40	22	58	69	65	281
61	40	15	50	69	65	308
42	67	65	1	33	0	238
9	34	67	65	24	227	426
201	54	0	1	223	255	734
9	126	254	0	32	4	425
54	27	24	219	254	129	787
32	250	58	69	65	71	545
62	247	120	205	221	65	928
42	67	65	35	54	0	263
205	26	65	24	229	197	746
6	50	14	50	13	32	165
253	5	32	248	193	201	932
6	4	197	205	253	64	729
58	132	64	254	10	40	558
15	205	155	65	205	70	715
65	193	5	32	235	205	735
133	64	24	220	193	14	656
5	197	6	4	197	205	614
70	65	205	155	65	193	753
5	32	245	205	133	64	684
193	13	32	235	201	71	745
58	131	64	128	50	131	562
64	201	28	28	28	28	377

BASIC listing

```
  20 DIM A$(8,32)
  25 FOR I=1 TO 6
  26 LET A$(1,(I-1)*5+1 TO )=" "
+CHR$ 129+" "+CHR$ 4
  27 LET A$(2,I*5-2)=CHR$ 128
  28 NEXT I
  50 LET A$(4, TO )=" "+A$(1,1 T
O 31)
  60 LET A$(5, TO )=" "+A$(2,1 T
O 31)
  70 LET A$(7, TO )="  "+A$(1,1
TO 30)
  80 LET A$(8, TO )="  "+A$(2,1
TO 30)
```

```
 90 LET A=0
 92 LET B=0
 94 LET C=0
100 LET D=2
110 LET E=15
120 POKE (256*PEEK 16397)+PEEK
16396+742),151
130 PRINT AT 1,0;A$(1,D TO );A$
(1, TO D-1);A$(2,D TO );A$(2, TO
 D-1);A$(3, TO );A$(4,D TO );A$(
4, TO D-1);A$(5,D TO );A$(5, TO
D-1);A$(6, TO );A$(7,D TO );A$(7
, TO D-1);A$(8,D TO );A$(8, TO D
-1)
140 LET D=D+1
150 IF D>=33 THEN LET D=2
160 IF (INKEY$<>"") OR (A>0) TH
EN GOTO 250
170 IF INKEY$<>"" THEN GOTO 250
180 IF 0<10 THEN GOTO 130
190 CLS
200 PRINT AT 2,5;"YOU SCORED ";
C;" POINTS";AT 7,5;"ANOTHER GAME
 (Y/N) ?"
210 IF INKEY$="" THEN GOTO 210
230 IF INKEY$="Y" THEN GOTO 10
240 STOP
250 FOR I=(20-A) TO (17-A) STEP
-1
260 IF I=20 THEN LET B=B+1
270 PRINT AT (I+1),E;" ";AT I,E
;"."
280 IF I>0 THEN GOTO 320
290 IF PEEK ((PEEK 16399*256)+P
EEK 16398-51)=0 THEN GOTO 320
300 IF PEEK ((PEEK 16399*256)+P
EEK 16398-51)<>128 THEN GOTO 380
310 GOTO 340
320 NEXT I
325 LET A=A+4
330 IF A>16 THEN LET A=0
335 GOTO 180
340 LET A$(I-1,E+D-1-((D>16)*32
))=" "
350 LET A$(I-1,E+D+1-((D>15)*32
))=" "
360 LET A$(I,E+D-((D>15)*32))="
 "
362 LET F=((PEEK 16399*256)+PEE
K 16398-21)
363 LET C$="**SPLAT**"
364 FOR J=F TO F+(LEN (C$)-1)
367 POKE J,CODE (C$(J-F+1))
368 NEXT J
370 LET C=C+(12-I)
380 LET A=0
385 FOR J=1 TO 20
390 NEXT J
395 PRINT AT I,E;" "
400 GOTO 180
```

ALL-IN-ONE

Spectrum owners! Imagine what great use you could make of all these components. Rotronics have integrated them all into one attractively styled, compact unit. All the power and convenience of floppy disk can now be yours, but at a fraction of the cost.

A complete package

Wafadrive is extremely versatile. Five major components are housed within this one unit—the micro interface, two 128K drives, RS232 serial and Centronics parallel ports. Also included in the package are a blank wafer and Spectral Writer—a superb word processor program. The micro interface forms the nerve centre of Wafadrive, controlling all its major functions. The dual drive configuration and the ability to connect standard peripherals directly provides professional system flexibility. All this without a mass of separate components and vulnerable cables. Wafadrive transforms your Spectrum into a very powerful system.

Speed, reliability and capacity

The wafers contain an endless loop of specially developed magnetic tape driven at high speed past a read/write head. The result is fast access without data loss. Three sizes of wafer are available with minimum formatted capacities of 16K, 64K and 128K. The 128K wafer costs £3.95.

Data transfer rate is approximately 2K per second. Access time is proportional to capacity. 16K wafers are ideal for program development with the larger capacity wafers being more suitable for general use and archiving of completed programs and data. Mechanical longevity is assured by the use of high grade materials throughout and full interchangeability between machines is guaranteed.

Extensive software applications

Wafadrive provides intelligent file handling and rapid access to data. Program development and other applications can be performed with ease. Start word processing immediately with the specially developed software package included with Wafadrive. Or battle with a spectacular interactive games program. Whatever your mood, you'll find the sophisticated Wafadrive software challenging and rewarding. Future versions of Wafadrive will be available for most popular home micros, so software back-up will be comprehensive.

For further information contact us now for our full colour brochure.

ALL-IN-ONE PRICE
£129.95 (Inc VAT)

Rotronics Limited, Santosh House, Marlborough Trading Estate, West, Wycombe Road, High Wycombe, Bucks HP11 2LB. Tel: (0494) 452757

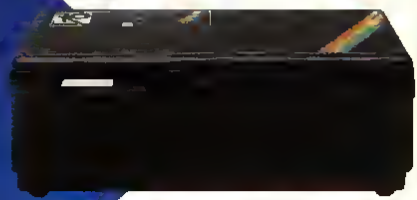

ROTRONICS
WAFADRIVE

League Tables

Keep track of who's where with Gordon Jones who, just for the record, hails from Middlesex.

This is a versatile program for keeping track of teams in a league, it could be football, darts or drinking in fact any activity which involves team positions.

The maximum number of teams as the program stands is twenty. This is all the ZX81 can display at once, but with a little programming effort and by viewing the league in sections this could be expanded.

The program is menu driven and prompts are provided at each stage, the program has provision for

- Setting up a league table
- Entering results and calculating positions
- Displaying the processed table
- Viewing any teams previous result
- Copying either the table or list of results
- Saving the table and results on tape

This versatile program is a boon to any club secretaries, will run as it stands on a Spectrum.

For the adventurous programmer it could be used as a basis for a simulation game. We already have several football progs, so what about a pool league simulation game?

```
  10 REM "LEAGUE TABLE"
  20 LET NU=0
 100 CLS
 110 PRINT TAB 12;"MENU"
 120 PRINT AT 2,0;"1. SET UP NEW
 TABLE"
 130 PRINT AT 4,0;"2. PUT IN SCO
RES"
 140 PRINT AT 6,0;"3. VIEW TABLE
"
 150 PRINT AT 8,0;"4. VIEW PREVI
OUS RESULTS"
 160 PRINT AT 10,0;"5. SAVE ON T
APE"
 180 PRINT AT 16,0;"ENTER THE NU
MBER OF YOUR CHOICE."
 190 INPUT CH
 200 IF CH<1 OR CH>5 OR CH<>INT
CH THEN GOTO 100
 210 GOTO CH*1000
 300 STOP
1000 CLS
1040 PRINT "THIS ROUTINE WILL ER
ASE ALL","PREVIOUS ENTRIES."
1050 PRINT AT 16,0;"M=MENU C=CON
TINUE: M,C ?"
1060 INPUT M$
1070 IF M$="C" THEN GOTO 1110
1080 GOTO 100
1110 CLS
1120 PRINT "NAME OF LEAGUE ?","(
MAX 7 LETTERS)",,
1130 INPUT N$
1140 IF LEN N$>7 THEN LET N$=N$(
 TO 7)
1150 PRINT N$
1160 PRINT "HOW MANY TEAMS ?","(
MAX 20)      "
1170 INPUT NU
1180 IF NU<1 OR NU>20 OR NU<>INT
 NU THEN GOTO 1170
1190 LET RN=0
1200 DIM X$(NU,4)
1210 DIM P(NU)
1220 DIM W(NU)
1230 DIM O(NU)
1240 DIM L(NU)
1250 DIM K(NU)
1260 DIM T(NU)
1270 DIM F(NU)
1280 DIM A(NU)
1290 DIM R$(NU*(NU-1),8)
1300 DIM S(NU*(NU-1),2)
1310 CLS
1320 PRINT AT 16,5;"GIVE THE NAM
ES OF ";NU;" TEAMS."
1330 PRINT AT 10,5;"USE 4 LETTER
S FOR EACH TEAM"
1340 FOR J=1 TO NU
1350 PRINT AT 21,0;" ...."
1360 INPUT Y$
1370 IF LEN Y$=4 THEN LET X$(J)=
Y$
1380 IF LEN Y$<>4 THEN GOTO 1310
1390 PRINT AT J,0;X$(J)
1400 NEXT J
1630 CLS
1640 PRINT AT 5,0;"HOW MANY POIN
TS FOR A WIN ?  ";
1650 INPUT WP
1660 PRINT WP
```

```
1670 PRINT AT 10,0;"HOW MANY POI
NTS FOR A DRAW ? ";
1680 INPUT DP
1690 PRINT DP
1700 GOTO 3000
2000 CLS
2010 IF NU=0 THEN GOTO 9000
2020 FOR J=1 TO NU
2030 PRINT AT J,21;J;".";TAB 24;
X$(J)
2040 NEXT J
2110 FOR J=1 TO 21
2140 PRINT AT J,0;":
     :"
2150 NEXT J
2300 PRINT AT 0,0;"RESULTS READY
 ?"
2310 PRINT "Y=YES N=NO: Y,N ?"
2330 INPUT Y$
2350 IF Y$="N" THEN GOTO 2660
2360 IF Y$<>"Y" AND Y$<>"N" THEN
 GOTO 2330
2370 PRINT AT 0,0;"
   "
2380 PRINT "                    "
2390 PRINT AT 3,0;"HOME TEAM:LIN
E NO.?"
2430 SLOW
2440 INPUT HT
2450 IF HT<1 OR HT>NU OR HT<>INT
 HT THEN GOTO 2440
2460 PRINT AT 12,0;X$(HT);" "
2470 PRINT AT 5,12;"SCORE ?"
2480 INPUT HS
2490 IF HS<0 OR HS<>INT HS THEN
GOTO 2490
2500 PRINT AT 12,10;HS
2510 PRINT AT 7,0;"AWAY TEAM:LIN
E NO.?"
2520 INPUT AT
2530 IF AT=HT OR AT<1 OR AT>NU O
R AT<>INT AT THEN GOTO 2520
2540 PRINT AT 14,0;X$(AT);" "
2550 PRINT AT 9,12;"SCORE ?"
2560 INPUT AS
2570 IF AS<0 OR AS<>INT AS THEN
GOTO 2560
2580 PRINT AT 14,10;AS
2590 PRINT AT 21,0;"C=CONT E=ERA
SE: C,E ?"
2600 INPUT C$
2610 IF C$="E" THEN GOTO 2640
2620 IF C$<>"C" AND C$<>"E" THEN
 GOTO 2600
2630 GOSUB 9000
2650 GOTO 2110
2660 CLS
2670 PRINT AT 10,0;"RESULTS WILL
 NOW BE PROCESSED"
2680 PAUSE 50
2690 CLS
2700 GOSUB 7000
3000 CLS
3010 IF NU=0 THEN GOTO 9000
3070 FAST
3080 PRINT N$;AT 0,8;"P   W   D
  L   DIF PTS"
3090 FOR J=1 TO NU
3100 PRINT AT J,0;J;TAB 2;".";X$
(J);TAB 8;P(J);TAB 12;W(J);TAB 1
6;D(J);TAB 20;L(J);TAB 24;K(J);T
AB 29;T(J)
3110 NEXT J
3120 PRINT AT 21,0;"M=MENU C=COP
Y: M,C ?"
3130 SLOW
3140 INPUT M$
3150 IF M$="C" THEN COPY
3200 GOTO 100
4000 CLS
4010 IF NU=0 THEN GOTO 9000
4040 LET PF=0
4050 LET PA=0
4160 FOR J=1 TO NU
4170 PRINT AT J,20;X$(J)
4180 NEXT J
4190 PRINT AT 2,0;"ENTER THE NAM
E";AT 4,0;"OF THE TEAM";AT 6,0;"
YOU REQUIRE."
4200 INPUT T$
4210 CLS
4220 PRINT AT 10,5;"STARTING TO
SEARCH"
4230 PAUSE 20
4240 CLS
4250 FAST
4260 PRINT TAB 7;T$;TAB 13;"F:";
TAB 19;"A:"
4270 PRINT AT 1,0;"(HOME)";TAB 2
6;"(AWAY)"
4280 PRINT AT 1,7;"----------
---"
4290 LET LN=1
4300 FOR J=1 TO NU*(NU-1)
4310 IF T$=R$(J, TO 4) THEN GOSU
B 4580
4320 NEXT J
4330 LET LN=1
4340 FOR J=1 TO NU*(NU-1)
4350 IF T$=R$(J,5 TO 8) THEN GOS
UB 4790
4360 NEXT J
4370 PRINT AT 0,15;PF;AT 0,21;PA
4380 PRINT AT 21,0;"M=MENU C=COP
Y: M,C ?"
4390 SLOW
4400 INPUT M$
4410 IF M$="C" THEN COPY
```

```
4420 GOTO 100
4580 LET LN=LN+1
4590 LET DL=0
4600 LET GL=0
4610 GOSUB 4900
4620 PRINT AT LN,3-DL;S(J,1);TAB
 4;"-";TAB 6-GL;S(J,2);TAB 8;R$(
J,5 TO 8);TAB 15;":"
4630 IF S(J,1)>S(J,2) THEN PRINT
 AT LN,0;"W"
4640 IF S(J,1)<S(J,2) THEN PRINT
 AT LN,0;"L"
4650 IF S(J,1)=S(J,2) THEN PRINT
 AT LN,0;"D"
4660 LET PF=PF+S(J,1)
4670 LET PA=PA+S(J,2)
4680 RETURN
4790 LET LN=LN+1
4800 LET DL=0
4810 LET GL=0
4820 GOSUB 4900
4830 PRINT AT LN,10;R$(J, TO 4);
TAB 24-DL;S(J,1);TAB 25;"-";TAB
27-GL;S(J,2)
4840 IF S(J,1)<S(J,2) THEN PRINT
 AT LN,30;"W"
4850 IF S(J,1)>S(J,2) THEN PRINT
 AT LN,30;"L"
4860 IF S(J,1)=S(J,2) THEN PRINT
 AT LN,30;"D"
4870 LET PF=PF+S(J,2)
4880 LET PA=PA+S(J,1)
4890 RETURN
4900 IF S(J,1)>9 THEN LET DL=1
4910 IF S(J,2)>9 THEN LET GL=1
4920 RETURN
5000 CLS
5010 IF NU=0 THEN GOTO 8000
5020 PRINT "GIVE A NAME TO YOUR
TABLE."
5030 PRINT
5040 PRINT "USE IT TO RETRIEVE Y
OUR RESULTS."
5060 INPUT Z$
5080 PRINT AT 0,0;Z$
5100 PRINT AT 15,0;"START RECORD
ING. PRESS NEWLINE"
5150 INPUT I$
5160 SAVE Z$
5170 GOTO 100
7000 FAST
7010 FOR J=1 TO NU
7020 FOR M=1 TO NU-1
7100 IF T(M)>=T(M+1) THEN GOTO 7
500
7220 LET DX=T(M)
7230 LET T(M)=T(M+1)
7240 LET T(M+1)=DX
7250 LET D$=X$(M)
7260 LET X$(M)=X$(M+1)
7270 LET X$(M+1)=D$
7280 LET DX=W(M)
7290 LET W(M)=W(M+1)
7300 LET W(M+1)=DX
7310 LET DX=P(M)
7320 LET P(M)=P(M+1)
7330 LET P(M+1)=DX
7340 LET DX=D(M)
7350 LET D(M)=D(M+1)
7360 LET D(M+1)=DX
7370 LET DX=L(M)
7380 LET L(M)=L(M+1)
7390 LET L(M+1)=DX
7400 LET DX=K(M)
7410 LET K(M)=K(M+1)
7420 LET K(M+1)=DX
7500 IF T(M)>T(M+1) THEN GOTO 78
80
7510 IF K(M)<K(M+1) THEN GOTO 72
20
7880 NEXT M
7890 NEXT J
7899 SLOW
7900 PRINT AT 10,0;"NEARLY READY
"
7910 PAUSE 10
7950 RETURN
8000 PRINT AT 5,0;"NO TABLE YET"
8010 PRINT AT 10,0;"(M=MENU)"
8020 INPUT M$
8030 GOTO 100
9000 LET P(HT)=P(HT)+1
9010 LET P(AT)=P(AT)+1
9020 LET K(HT)=K(HT)+HS-AS
9030 LET K(AT)=K(AT)+AS-HS
9040 LET F(HT)=F(HT)+HS
9050 LET A(HT)=A(HT)+AS
9060 LET F(AT)=F(AT)+AS
9070 LET A(AT)=A(AT)+HS
9090 LET RN=RN+1
9100 LET R$(RN, TO 4)=X$(HT)
9110 LET R$(RN,5 TO 8)=X$(AT)
9120 LET S(RN,1)=HS
9130 LET S(RN,2)=AS
9240 IF HS>AS THEN GOTO 9310
9250 IF HS<AS THEN GOTO 9410
9260 IF HS=AS THEN GOTO 9510
9310 LET W(HT)=W(HT)+1
9320 LET L(AT)=L(AT)+1
9330 GOTO 9600
9410 LET W(AT)=W(AT)+1
9420 LET L(HT)=L(HT)+1
9430 GOTO 9600
9510 LET D(HT)=D(HT)+1
9520 LET D(AT)=D(AT)+1
9600 LET T(HT)=W(HT)*WP+D(HT)*DP
9610 LET T(AT)=W(AT)*WP+D(AT)*DP
9700 RETURN
```

WHITE LIGHTNING

THE KEY TO PROFESSIONAL GAMES DESIGN ON THE SPECTRUM 48K

THE GAMES LANGUAGE OF THE 80'S!

Now, without any knowledge of machine code you can write fast, smooth professional totally original games and market them **without paying royalties**.

Even if you have already mastered machine code we believe that the time and problems saved by writing in **White Lightning's** FORTH-based high level language could revolutionise commercial games writing for years to come.

IDEAL IDEAL is an Interrupt Driven Extendible Animation Sub Language. Once you have mastered IDEAL's easy to learn set of over 80 commands and just a little FORTH you will be ready to produce arcade quality games even if you don't know machine code. Up to 255 Sprites (each with its own user-defined dimensions) can be moved around the screen (or memory) scrolled, spun, reflected, enlarged or inverted with amazing speed and smoothness. Operations are possible between screen windows. Sprites and Sprite windows. Sprites can even stretch across several screens, so those difficult scrolling landscapes that form the basis of so many games are easy to achieve. Sinclair's own sound and graphics commands such as CIRCLE, DRAW and BEEP are fully supported, and there are some unique collision detection facilities.

MULTI-TASKING Because **White Lightning** uses interrupts you can effectively run two programs at once. This means of course that games like Space Invaders and Defender can be written without complex machine code programming. So while the program is smoothly scrolling the landscape the aliens and all the other characters. This is undoubtedly one of White Lightning's most powerful features.

MARKETING AND PORTABILITY Although **White Lightning** uses an integer FORTH as its host language, programs can be written in a combination of BASIC, FORTH, IDEAL and machine language.

What is more, programs written in FORTH/IDEAL will be highly portable between the Spectrum and implementations under development for other popular micros.

When it comes to marketing your completed games there's no problem either. In fact Oasis themselves will offer to market outstanding software.

SPRITE DESIGN White Lightning comes complete with a separate 2UK program for developing the Sprites used in the main system. Not only can you use this to design your own Sprites from scratch, it also comes complete with 168 pre-defined characters covering games like **Asteroids, Pac-Man, Assault Course, Defender, Space Invaders, City Bomber, Lunar Lander, Frogger, Centipede, Donkey Kong** and many many more. These characters are ready to use, or can be enhanced. And Sprites can be saved to tape between editing sessions before being finally loaded into the main program.

The High Level Graphics Development System for the SPECTRUM 48K .....

OASIS SOFTWARE

AND COMING SOON! the power of White Lightning on the COMMODORE 64!

- Produces real machine code programs which run independently of White Lightning.
- A multi-tasking Animation language AND a Sprite Development program together in one system pack.

- Supplied with a FREE 16-minute demo, and a 150-page, easy-to-follow manual.

If your local dealer doesn't stock White Lightning, just send off this coupon for our rapid-despatch service.

Please send me ___ White Lightning System Packs at £14.95 each. I enclose my cheque/P.O. for £ ___

Name ___

Address ___

Oasis Software 9a Alexandra Parade, Weston super-Mare, Avon, BS23 1QT Telephone (0934) 419921. Every product comes a lifetime guarantee. All prices include extensive manual, VAT and p&p.

24 Hour Access Tele-ordering on (0934) 419921.

Astro Zone

Where would we be without our usual foray into space? Craig Sanders of Stockport provides the transport

Don't they ever learn? Despite the incredible losses due to Earth's accurate and deadly fire from an army of computer trained marksmen, those suicidal Aliens continue to attempt to invade us.

But this time, who Knows? Maybe we are getting over confident, trigger fingers weening a bit thin, stricken by conscience?

I liked this one because of the attention to detail, stars etc and tha fact that you have the extra advantage of five energy shields.

Craig has taken care to produce a game which is graphically effective with good use of sound and provides a challenge. I won't tell you my final rating, but there used to be an old cinema newsreel with a similar name.

All instructions and details of the control keys are included in the program.

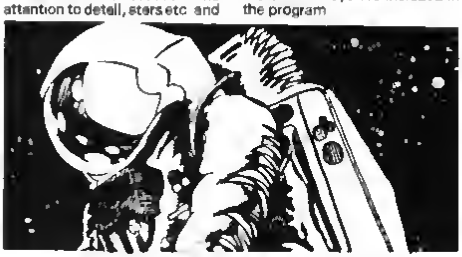

```
  1 REM ******ASTRO ZONE******
  2 REM *  C.SANDERS 1983  *
  3 REM *     16K SPECTRUM     *
  4 REM *A,B,C and D in lines*
        *120,150,230,240,410,*
        *420 and 1030 are UDG*
        *graphic mode chars. *
        **********************
  5 LET hi=0
 10 REM ***GRAPHICS***
 15 PAPER 0: BORDER 0: INK 7: C
LS
 20 FOR f=0 TO 3: FOR g=0 TO 7:
 READ c: POKE USR CHR$ (144+f)+g
,c: NEXT g: NEXT f
 30 DATA 24,24,24,60,60,60,255,
255
 40 DATA 126,255,219,255,153,12
9,129,195
 50 DATA 32,1,72,16,8,0,68,16
 60 DATA 0,136,85,34,0,130,85,3
4
 70 LET sc=0: LET li=5: LET en=
3: LET z=19: LET m=12: LET le=1
 100 REM ***INSTRUCTIONS***
 110 FLASH 0: BRIGHT 0: OVER 0:
INVERSE 0
 120 PRINT AT 2,4; INK 4;"B  B"
 INK 7;" ASTRO BATTLE"; INK 4;"
B  B";AT 3,4; INK 7;"----------
----------"
 130 PRINT AT 6,4; INK 7;"CONTRO
LS:";AT 8,6; INK 6;"(5) - LEFT";
AT 10,6;"(8) - RIGHT";AT 12,6;"(
7) - FIRE";AT 14,6;"(6) - ENERGY
 SHIELDS"
 140 PRINT AT 18,4;"Press any ke
y to continue...": PAUSE 0
 150 CLS : PRINT AT 0,0; INK 7;"
OBJECT:";AT 8,0; INK 6;"Blast as
 many alien attackers  (B) as p
ossible,using your lasercannon (
A) You have 5 lifes and lose one
 each, time an alien is able to
land.If you are unable  to reach
 the Intruder use your energy s
hields,but you will NOT score.Yo
u have a maximum of fifteenergy s
hields......GOOD LUCK!"
 160 PRINT AT 21,6;"Press any ke
y...":
 170 PAUSE 0: CLS : FOR i=30 TO
0 STEP -2: BEEP .01,i: BEEP .005
,i+30: NEXT i
 200 REM ***SCREEN DISPLAY***
 205 FOR f=0 TO 50: PLOT RND*250
,RND*170: NEXT f
 210 PRINT AT 0,0;"[SCORE]:";sc;
AT 0,15;"[HIGH-SCORE]:";hi;AT 21
,0;"[LIVES]:";li;AT 21,10;"[SHIE
LDS]:";en;AT 21,23;"[LEVEL]:";le
 211 IF le=1 THEN  LET x=2
 212 IF le=2 THEN  LET x=3
 213 IF le=3 THEN  LET x=4
 214 IF le=4 THEN  LET x=5
 215 IF le=5 THEN  LET x=6
 216 IF le>5 THEN  LET le=5
 225 LET s=INT (RND*24)+1
 230____ PRINT AT x,s; INK 4;" B ";A
T x-1,s;"   "
 240 PRINT AT z,m; INK 5;" A "
 250 LET m=m+(INKEY$="8" AND m<2
8)-(INKEY$="5" AND m>0)
 260 IF INKEY$="7" THEN  GO TO 350
```

```
 270 IF INKEY$="6" AND en>0 THEN
  GO TO 400
 280 LET s=s+(RND>.4 AND s<30)-(
RND>.4 AND s>1)
 290 IF x>=10 THEN  GO TO 600
 300 LET x=x+1
 310 BEEP 0.004,x
 315 IF sc=100 THEN  LET le=2
 316 IF sc=200 THEN  LET le=3
 317 IF sc=300 THEN  LET le=4
 318 IF sc=600 THEN  LET le=5
 340 GO TO 230
 350 REM ***FIRE***
 355 PLOT 0*(m+1)+3,24: DRAW 0,(
17.9-x)*8: OVER 1: PLOT 0*(m+1)+
3,24: DRAW 0,(17.9-x)*8: OVER 1
 360 FOR p=10 TO 15: BEEP .005,p
: NEXT p: OVER 0:
 370 IF m=s THEN  GO TO 700
 380 GO TO 260
 400 REM ***ENERGY SHIELDS***
```

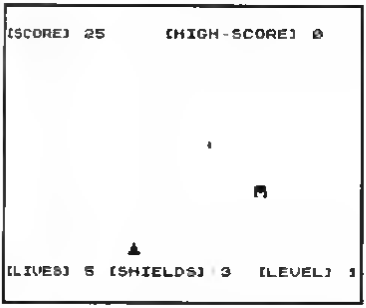


```
 410 FOR n=10 TO 2 STEP -2: PRIN
T AT n,0; INK 6; PAPER 9;"DDDDD
DDDDDDDDDDDDDDDDDDDDDDDD": NE
XT n
 420 PRINT AT x,s+1; INK 6; PAPE
R 2;"C": FOR v=40 TO 55: BEEP .
02,v: NEXT v: PRINT AT x,s+1;" "
 430 FOR n=2 TO 10 STEP 1: PRINT
 AT n,0;"
          ": NEXT n: PAUSE 10
 440 LET en=en-1
 460 GO TO 210
 600 REM ***LIVES***
 610 LET li=li-1: IF li=0 THEN
GO TO 650
 615 PRINT AT x,s;"   "
 620 FOR f=1 TO 2: BEEP .05,20:
BEEP .05,0: BEEP .04,2: BEEP .05
,1: NEXT f
 630 GO TO 210
 650 GO TO 1000
 700 REM ***EXPLOSION***
 710 PRINT AT x,s+1; INK 6; PAPE
R 2;"C": FOR v=40 TO 55: BEEP .0
3,v: NEXT v: PRINT AT x,s;"  ":
 715 LET sc=sc+25
 720 GO TO 210
1000 REM ***GAME OVER***
1005 FOR g=1 TO 5: FOR f=0 TO 7:
 BORDER f: BEEP .03,f: NEXT f: N
EXT g
1010 BORDER 0: PAPER 0: CLS : PR
INT AT 10,10;"GAME OVER"
1020 PAUSE 30
1030 PRINT AT 10,10; INK 6; PAPE
R 2;"CCCCCCCCC": FOR a=10 TO 20:
 BEEP .02,4-a: NEXT a: PRINT AT
10,10;"          ": PAUSE 50: CLS

1040 PRINT AT 5,0;"FINAL SCORE=";
sc
1050 IF sc>hi THEN  LET hi=sc
1060 PRINT AT 7,0;"HIGH-SCORE=";
hi
1065 PRINT AT 9,0;"LEVEL=";le
1070 IF sc<=0 THEN  PRINT AT 15,
0;"P A T H E T I C!!!"
1075 IF sc>0 AND sc<300 THEN  PR
INT AT 15,0;"NOT BAD - TRY AGAIN
!"
1080 IF sc>300 AND sc<700 THEN
PRINT AT 15,0;"GETTING BETTER"
1090 IF sc>700 AND sc<800 THEN
PRINT AT 15,0;"EXCELLENT!"
1095 IF sc>800 AND sc<900 THEN
PRINT AT 15,0;"SUPREME CHAMPION!
!!!":
1100 IF sc>1000 THEN  PRINT AT 1
5,0; PAPER 6; INK 2; FLASH 1;"UL
TIMATE SUPREME CHAMPION!!!!!!"
1200 PRINT AT 20,0;"Press any ke
y to play again...."
1250 FOR c=1 TO 5: FOR x=0 TO 7:
 BEEP .01,x+c: BEEP .02,x+c: BEE
P .03,x-c: NEXT x: NEXT c
1300 PAUSE 0: CLS : GO TO 70
```

THE MOST IMAGINATIVE GRAPHICS PROGRAMMING SOFTWARE FOR YOUR SPECTRUM

GRAPHICS PROGRAMMING MADE EASY– THE PRINT 'N' PLOTTER WAY!

PRINT 'N' PLOTTER

PAINTBOX

Superb Graphics – without expensive hardware!

PAINTBOX gives the 48K Spectrum owner *every* facility to produce excellent graphics — easily, quickly and professionally.

There's no need for expensive hardware. PAINTBOX is flexible, precise and incredibly simple to use!

Just take a look at some of the facilities available:

UDG EDITOR

The facility to define up to 84 graphics characters which can be stored in your BASIC programs for instant recall from its own built-in machine code!

UDG DRAWING BOARD

UDG planner for the 4 banks of characters. Facilities include: MIRROR IMAGE, ROTATE, INVERSE, FILL.

SKETCHPAD

Experimentation window, that allows you to try-out your UDG ideas under development.

PRECISION PLOTTER

Amazing versatile high-resolution drawing board which includes PAPER choice, PLOT, DRAW, DRAW RADIALLY, CIRCLE, ARC, OVER, FILL, instant change of INK and BRIGHT, multi-function ERASE, and STORE.

Cursor is controlled by keyboard or Joystick with FAST, SLOW, and Cursor size choice!

SCREEN PLANNER

For the best of both worlds! PRECISION PLOTTER and UDG CHARACTERS! For complete screen planning of graphics. A multi-purpose facility to enable you to produce superb screen graphics!

All results can be sent to a printer, saved as SCREEN$ or SAVED as CODE with its built-in machine code routine, for instant recall from BASIC.

The program is complete with a cassette demo and a 28 page booklet describing in easy-to-understand language how to use it, plus many tips for storing and using your graphics in programs.

PRINT 'N' PLOTTER

SCREEN MACHINE

Instant machine code for graphics and text



SCREEN MACHINE is an invaluable graphics utility to use with PAINTBOX or any other graphics hardware or software!

It gives a wide range of facilities to enable you to manipulate graphics and text, saving time, memory, and giving truly professional results.

For instance: SCREEN MACHINE COMPRESSES Screen Files to cram even more into the memory!

It COMPILES text, graphics characters or UDG's instantly into machine code, giving fast smooth access to the screen!

It CREATES re-callable 'Multiple Screen Files' automatically with its own built-in machine code!

It ENLARGES screen sections in 2X steps!

It REDUCES the whole screen in 2X steps!

It RECOLOURS your screen graphics either globally or selectively!

It MIRRORS the screen left to right, making flip-action animation easy!

It RELOCATES your screen graphics to any other part of the screen with block or high resolution scrolls!

It SUPERIMPOSES screen graphics giving incredible 'mixing' results!

It SAVES everything to tape or Microdrive, for use within your BASIC programs!

There's no doubt that SCREEN MACHINE is a major graphics toolkit for the 48K Spectrum. It is completely menu-driven and comes complete with demo program and fully-documented instruction booklet.

Another first from Print 'n' Plotter!

PRINT 'N' PLOTTER

ZX SPECTRUM JOTTER

Pre-planning your screen made easy . . . and precise!

Print 'n' Plotter JOTTERS have become a household word for the Sinclair enthusiast.

Despite various imitations our original ZX SPECTRUM JOTTER is still the one people prefer!

Of course, it could be because it is professionally produced . . . the quality is superb.

And the fact that it is **BIG SIZE** A3 (16½" x 11¾") is a distinct advantage when working in high resolution.

It's also 100 pages thick: 50 pages of PLOT grids showing each numbered pixel co-ordinate, and 50 pages of PRINT grids showing every character and graphic character position and INPUT lines.

Each page also contains 24 UDG planning grids (2400 per pad).

Consider also the fact that it is printed on Artist's Detail paper . . . thick enough to take any writing, drawing or colouring, yet thin enough to overlay onto a drawing and trace off.

For pre-planning graphics, text, tabulation or anything to produce on screen, a Print 'n' Plotter JOTTER won't be beaten.

The complete package comes with a set of coloured pens, a Pixel ruler and a handy corrugated storage tray.

If you like PAINTBOX, SCREEN MACHINE or any other graphics utility, you'll do things better with the ORIGINAL Print 'n' Plotter JOTTER!

PRINT 'N' PLOTTER

KEYBOARD OVERLAYS

The simple answer to 'Which key?'

Print 'n' Plotter KEYBOARD OVERLAYS for the standard ZX Spectrum keyboard are the economic answer to 'Which key does what?'

If you program, or buy commercially produced software, sooner or later you'll be faced with a mind-boggling mass of keys that perform different functions.

This can be as simple as the 'FIRE' button in a game or as precise as the 'analysis' button in a scientific program.

Let's face it: the Spectrum keyboard is complicated enough, so why not take the easy way to remember.

Lay over the keyboard a Print 'n' Plotter OVERLAY and write the function underneath . . . it's child's play!

Then keep the OVERLAY for the next time you use the program.

Print 'n' Plotter KEYBOARD OVERLAYS come in packs of ten. Punched to fit your Spectrum. Priced to suit your pocket!

PRINT 'N' PLOTTER

ZX PRINTER PAPER

Print 'n' Plotter Products also market ZX PRINTER PAPER that gives good, clear print, eminent feeding qualities — probably the best you'll find in the U.K.

FAST DELIVERY and economically priced . . . you won't find better!

CREDIT CARD 24HR 'ANSAPHONE ORDERS

01-660 7231

(Pls. do not write/phone for leaflet and then enquiries!)

Post to: Dept Z, Print 'n' Plotter Products Ltd., 19 Borough High Street, London SE1 9SE

Please send me:

PAINTBOX SOFTWARE @ £8.25

SCREEN MACHINE SOFTWARE @ £8.25

SPECTRUM JOTTER PADS @ £9.00

SPECTRUM KEYBOARD OVERLAYS @ £2.95

5 ROLLS ZX PRINTER PAPER @ £12.50

All prices include U.K. postage and VAT.

I enclose cheque/P.O. for £ _____

Please bill my Access/Barclaycard/Visa/MasterCard No.

_____

Overseas orders please add 25% to quoted prices for additional handling.

NAME _____

ADDRESS _____

_____

_____

_____

Print 'n' plotter Products

INTERFACITS — Joystick Interfacing Investigated!

A comprehensive round up of the units available — checked out by our team of reviewers

One of the first add-ons that a computer owner may contemplate buying is a joystick of some kind. The increase in control that this provides is of obvious benefit to the dedicated games player. In addition it is becoming increasingly necessary for some of the complex graphics packages that are appearing for the Spectrum. However if you have not yet taken the plunge and are now contemplating the purchase of some form of controller you have a difficult choice ahead of you. In essence, most of the actual joysticks are very similar, and your eventual purchase will be based upon personal preferences for shape, size, ease of use etc., but the biggest decision to make will be that concerning the vital link between your joystick and the computer i.e. the INTERFACE.

Interfaces allow the use of joysticks with compatible software, and although there is a great variety of material available for use with all the more common interfaces no single one will give you control over every game, unless, of course you opt for a PROGRAMMABLE INTERFACE. These claim to give you joystick compatibility with ALL software.

Non programmable

Kempston
£11.95

Probably the nearest thing to a "standardised" interface. This unit has been around almost as long as the Spectrum itself and most games have a Kempston option.

The unit works by utilising the IN31 function and so the keyboard is not enabled. This also means that a program must cater specifically for it and some of the earlier games don't. To get over this Kempston market a set of tapes which will convert some of these to operate with their interface, each of these will cost £4.95.

The box plugs into the port of the back of the Spectrum and the joystick plugs into a standard 9 pin socket at the front of the unit. This means that the joystick leads trail over the keyboard and if you have a full sized keyboard then this plus the fact that the box has a 'lip' means that fitting it is a great problem.

Although it's starting to show it's age there's still plenty of life in this well tried and loved device.

Interface II
Sinclair Research
£19.95

A multi purpose unit which includes two joystick sockets, a ROM cartridge socket and a limited through port.

Sir Clive in his wisdom, decided to use his own "standard" for operating his interface and this is not the same as Kempston. This means that many of the earlier games will not operate with it although most of the recent programs incorporate an interface II option. In fact many games have a larger choice of joystick options than gameplay options!

When provided, two joysticks can be used simultaneously and this is the greatest advantage of this unit. It has been on the market for quite a while now and the presumed flood of cartridge programs has not materialised. This is really the power of this unit and if they are not going to be produced then it has limited value as a joystick interface.

RAM Turbo
Ram Electronics (Fleet) Ltd.
£22.95

Similar to the Sinclair Interface II, this unit has two joystick sockets and a cartridge slot. It also has a through port but in the Turbo it is a full one unlike the Interface II.

The Sinclair format is not used, but both Kempston (IN31) and Protek (cursor key) systems are supported. I don't know if this means that only one joystick at a time can be used as we never received a review unit.

Games Ace
Vox Box
Datel Electronics
£29.95

Although requested, neither of these units were sent for review, so I'll just give a mention of the information available.

Games Ace works on the Kempston function so it will be compatible with that option, but also has the bonus of including circuitry to output the sound to the TV where the volume can be controlled.

Vox Box is the same as the Games Ace but also includes a speech synthesizer based on the elliophone system. Sounds interesting.

Pro Joystick Interface
Kempston Micro Electronics Ltd.
£19.95

After a long run with their best selling interface Kempston have decided to introduce this model. Similar in many respects to the Sinclair Interface II it seems

much more versatile. As it's hot off the production line we haven't yet seen one. However I'm told that it has three separate 9-pin plugs which cover Kempston's own system, Sinclair I/F II standard and the AGF/Protek cursor key format. There is also a ROM cartridge port. With Kempston's experience in the market it's got to be worth a look.

Solidisk Technology Ltd. £8.50

One of the cheapest interfaces on the market, this one operates on the Kempston standard and is claimed to be wobble free. Sold complete with a Quickshot style joystick for £15.50.

Even more useful is that should you forget to change the switch or get the wrong option then you can safely change the option once the program has been loaded and is actually running!!

An interface which I would recommend to any dedicated games player who requires a simple, effective means of joystick control.

Protek also market a presentation pack of joystick, interface and their own flight simulation program for £24.95.

AGF Joystick Interface II £9.95

AGF have two joystick interfaces on the market at the moment — one programmable and the other not. Interface II is the non-programmable one, but there are versions for both the ZX81 and the Spectrum.

The interface will accept a wide range of joysticks including Atari, Starfighter, Le Stick etc and has facility for a second joystick to be used. There isn't much to it in the way of hardware, just a few plugs and sockets and six chips. I noticed they have rubbed off the numbers on the chips to deter people making their own, but at £9.95 it's not worth the bother.

The interface just clips on the back of your computer and has a rear extension for more add-ons. With a joystick plugged straight in it will mimic keys 5,6,7,8 and 0 and the second port will give you T,Y,U,I and P.

To convert games that do not use these keys, you will have to purchase AGF's software and you have a choice of two cassettes. Tape one will convert Arcadia, Schizoids, Hungry Horace, Horace goes Skiing, Spectres, Penetrator and tape two converts Centipede, Planetoids, Jet Pac, PSSST, 3D Combat Zone and Invaders.

After you have loaded the cassette it will ask you which game you would like to play and after running the tape further it will automatically find the corresponding software to convert that game and tells you what to load your game.

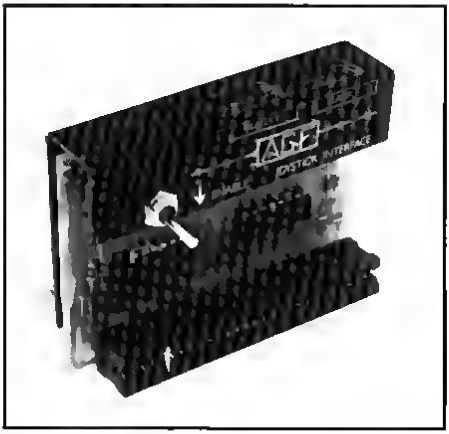

On the inlay, it lists the games you can use the interface with. I would have thought it would have been better to list the key coerstions as well so that it would be easy to find what other games you could play with it.

You can buy the interface, software and joystick direct from AGF if you cannot find it at your local store. Cassettes are £4.95.

It is a slightly 'Heath Robinson' way of connecting a joystick but it is cheap.

Clive Smith

DK'Tronics Joystick Interface
DK'Tronics Ltd. £13.00

Another little shiny black box (7 × 5 × 2·5cm) to get quickly forgotten somewhere between joystick and computer is the **DK'Tronics Joystick interface**.

It has a firm positive fit into the expansion port at the rear of the Spectrum, although because only 22 of the contacts on the edge connector are used, the actual fitting tends to require more care and caution than with other units. There are two nine pin, 'D' type ports at the top of the unit and both are clearly identifiable. The first is for use with software using a key change option or using 6,7,8,9 or 0 keys. The second port uses the IN31 command is therefore for use (software compatible) with the Kempston type joystick.

The test routines and a few example programs (one using ▶

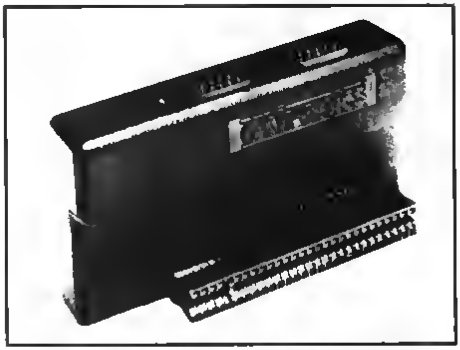

machine code) are given in the accompanying instruction leaflet, for those people who want to stretch themselves beyond being mere players who want to incorporate their joystick and interface into their own programs. And for those programmers who want to use two joysticks to control two separate objects at the same time on the screen, then both ports of this interface can be incorporated simultaneously into programs.

Just out of interest, I wonder how many micro-users actually do use their joysticks and interfaces for anything else besides playing commercially produced games?

Colin Christmas

Programmable Interfaces
Rainbow Electronics £24.00 (+ £3.00 extra for a through-port)

Another interface which never made it to our office in time for this roundup.

The interface includes a built in amp and speaker, the joystick socket and the programming switch are positioned at the front (with all the associated problems).

CCI (Custom Cables International) £15.00

This unit is programmed by means of software supplied on tape, and this means that you have to load in the program supplied before loading your game. This isn't a great problem as it is a short program and setting up the keys is straightforward and only takes a few minutes. The unit we had didn't have any instructions. CCI promise that they are supplied with each purchase — we just had "a very early preview model". Nevertheless I found it simplicity itself to operate even without them — which can't be bad.

The only problem is that some games don't tell you which keys the program uses so you have to load them in first to find out! This is only a problem the first time round because, being sensible, you kept a record for the next time, didn't you?

The unit proved reliable and effective over a three week period of constant and frequent use and I see no reason why it shouldn't perform admirably for a long, long time.

At the price it is probably one of the cheapest of it's kind and worth considering if, as it is for me, money is a prime factor.

Jim Watson

Programmable Joystick Interface Stonechip Electronics £24.45

As with most similar interfaces this is simply a plug-in unit which requires no additional links such as flywires of extra tapes to load. The unit itself measures 90 x 75 x 35mm and is contoured to fit snugly to the rear of your Spectrum. It features a three-way switch at the front enabling the user to select any of the three modes, Program, Play or Normal operation (where control relies upon the keyboard alone).

The interface draws its power from the computer and a small red L.E.D. indicates power on. A standard 9 pin Atari-style joystick socket allows the use of your favourite zap-em stick!

It is at this stage that my first complaint appears. No doubt many satisfied users will disagree, but why, when an increasing number of games require the use of at least two extra hands, does the port have to be placed so that the joystick lead runs right across the keyboard?

Programming of the interface is fairly easy — set the selector to the Program position, press the appropriate direction key and move the joystick into the relevant (or not so relevant) position. The small but adequate, instruction sheet advises that the most complex functions be dealt with first and this gives rise to the second little quibble.

As opposed to certain other interfaces available, the Stonechip requires the FIRE function to be input separately for each and every direction. This is sometimes not all that easy when you require one hand for the keyboard, one for the fire button and direction and one to stop the mobile joystick from sliding off the table!

Apart from that, the programming of the interface is a straightforward, if not lengthy, process. Programming complete, just move the selector to Play and away you go! One additional feature is the Normal position that allows the joystick to be removed without loss or corruption of the keys already programmed.

The unit was tested with a variety of joysticks and performed perfectly well with all of them. Included in the instructions is a sample program to enable practice — programming prior to testing on the real thing.

If a Programmable Interface is the sort that you require then this should be considered. It is slightly expensive in comparison to some of the updated and newer models now appearing, but nevertheless is a tried and tested product that has stood the test of time.

Mike Edmunds

The Cambridge Joystick Interface £34.95 (Including Joystick)

This interface has a through-port at the back which is very useful for using other units like speech or sound devices. The unit also has a lip on the front to help prevent "wobble" but if you have a non-standard keyboard it gets in the way.

There is the usual nine pin plug on the left hand side for the joystick and the overall size is 11.5cm x 3.5cm x 7.5cm.

To use the interface you have to load a tape first which programs the interface to respond to the appropriate keys. If the game you're using fails to give this information on the instructions then you have to load the game first to find out! However, once you have programmed a set of key sequences, they can be saved on tape (the reverse side of the tape has been left blank for this purpose and provision is also made for saving to microdrive) and many games can be saved at one time. You are able to check the joystick position at the end of the programming sequence.

This interface is sold complete with a joystick and tape, the joystick is available seperately and is reviewed as such.

The interface is a bit fiddly to use but has proved compatible with all software tried, but when an option of joystick or keyboard is offered from within a program, you must use the keyboard one as the joystick option frequently does not work.

M J Maggs

Programmable Joystick Interface Downsway Electronics (UK) Ltd. £22.95

The Downsway Programmable Interface which has been available for quite some time now, is at first sight rather a plain black unit which plugs directly into the Spectrum's rear expansion port. It measures 65 x 95 x 25mm and has a dual-position switch on the rear and a standard 9-pin joystick socket on the right side of the unit. This is one of the advantages that this interface has over some other units currently available, in that the keyboard is left uncluttered by control cables and therefore can be used in conjunction with the joystick. This gives the user a wide range of control options which can be a distinct benefit considering the handful of keys that some programs demand. A small instruction sheet provided with the interface gives all the information that is needed to make your joystick compatible with any program.

Programming of the interface can be achieved either prior to

loading a game or after the game has loaded. This facility takes care of all those programs that have no detailed instructions on the cassette inlay. To use this unit is simplicity itself — with the dual position switch in 'program' mode press the key for the specified command and move the joystick to the appropriate position. Release joystick and key then repeat for all other movements. In essence that's all there is to it!

After programming (a few minutes work) switch to the play mode and away you go!

In operation the unit performed perfectly and on the odd occasion when a mistake was made it was a simple matter to re-program the offending key without the necessity of going through the entire procedure again.

The FIRE command is independent of direction command and this means that FIRE has only to be programmed once as opposed to the multiple movement/fire operations needed with some interfaces.

The unit was tested with several joysticks ranging from the cheapest to one of the most expensive available and it performed equally well with all, the only noticeable difference being a somewhat coarser movement with one of the cheaper joysticks. Of the many programs used with this interface only two gave any problems — keys could be programmed but pressing the firebutton caused the game to restart. As it happens the particular games weren't intended for joystick use anyway!

In conclusion, if a joystick interface is high on your list of priorities then it may well be worth your while paying a bit more for the extra flexibility that the excellent little unit provides.

Mike Edmunds

Fox Programmable Interface
Fox Electronics Ltd.
£54.95

I have used this unit consistantly over a four week period with a wide variety of games and I recommend it to anyone looking for such a unit.

It is a rather large unit and the long suffering DK'Tronics keyboard needed another bit removed before it would fit! The standard case presents no problems however.

The unit has a through port so you can use other interfaces behind it, the Currah micro speech unit worked fine at the back, and the standard 9 pin joystick socket is near the bottom of the right hand side of the case. Just above the socket is a small, two way (up/down) switch. On power up the switch should be in the down position — switching it up instantly presents on screen a menu of 16 possible combinations of responses and options to create or select a set or to exit.

The more knowledgeable among you will have worked-out that the unit must contain a programmable chip of some sort. The program and set of key combinations are kept permanently refreshed by a battery which is constantly recharged.

What happens if something goes wrong?

The interface is supplied with a back up tape and also your own sets of positions can be saved on tape and easily reloaded into memory if needed. A few times I had to perform this operation due to the awkward fit with the keyboard but it was no real problem.

Documentation is good, covering all the operational details and also how to use it as a pseudo ROM. All in all easy to use and one of the most impressive joystick interfaces I've used.

AGF Programmable Joystick Interface
£26.95

AGF sell a version of this interface for both the Spectrum and the ZX81 and both cost £26.95.

The interface works by duplicating the keyboard layout with a grid of wires. The wires ending in crocodile clips can be attached to the various grid wires to route specific keys to the joystick. This means that all games can be controlled by joystick although you must use the keyboard option and not the joystick one when provided.

The joystick is connected by a standard 9 pin D socket so it is compatible with the majority of the sticks on the market, two sockets are provided for two sticks for two players to play alternatively. Both sockets operate on the same keys and both sockets and the keyboard are always operative. A possible cause for dispute when used by two players! A set of quick reference cards, a demo tape and a stick on chart completes the package.

The sight of uncased wires and chips may put off some users, but treated reasonably, this is an almost foolproof method of providing joystick control to any game.

The unit has a through port and further peripherals can be added afterwards. I used a Centronics interface and a speech unit with it and had no problems.

Switchable Interface
Protek Computing Ltd.
£19.95

An interesting and unusual idea from Protek is to provide the ability to switch between the common interface options. The interface has a three way switch at the back marked, logically, 1, 2 and 3. Setting the switch will give you compatibility with Protek/AGF (cursor keys), Kempston and Sinclair Interface II formats respectively.

Between these three options I should think that around 90% of the software on the market can be used with this unit. The only programs which will cause problems are those where no joystick options are provided and keys other than the cursor keys are used, and there can't be many of those!

The case is quite small and neat with the usual 9-pin plug fitted in the right hand side of the unit. This is a handy position to allow the joystick lead to clear the keyboard.

The instruction leaflet is as I like them, written in a simple step by step manner with diagrams — if you get it wrong it certainly won't be Protek's fault.

My biggest criticism is the lack of a through port, but with other devices available to compensate it's not as drastic a problem as it used to be.

Using this is a delight even though most programmables are quickly and easily programmed, sometimes it doesn't seem worth the bother. With this one, compatibility is usually available at the flick of a switch.

Firmware Programmer Interface £29.00
Software Programmer Interface £22.95
Voltmace Ltd.

Two other interfaces unseen by us. One is programmable by using a two-way switch and the other by using a program on tape. The most interesting item that I've seen from this company must be their Delta 3 joystick, which has a rectangular base, three fire buttons (to allow for individual styles of holding the thing) and a finger-tip type joystick at £10.00.

Pace Computing

This company advertises a programmable interface for £26.00 which they say does not disable the keyboard and can be reprogrammed during a game. No further information is available so far.

East London Robotics Ltd.
£15.00

Designed to be sold with their Trick Stick (of which we're still waiting for a review sample), it appears to be similar to the AGF programmable interface, in that flyleads which are connected to pins to mimic the keyboard are used.

If bought with the Trick Stick, then it will only cost £10.00, which can't be bad!

Dk'Tronics Ltd.
£22.95

This is Dk'Tronics deluxe interface and is programmable from the keyboard by using the switch provided on the top of the unit, or via the program supplied on tape.

There is only one socket provided on this model, but as it is fully programmable there isn't any need for two separate sockets to cover the different methods of providing control. The socket is located on the top of the interface next to the switch.

During operation, the keyboard is still enabled so that complex games requiring more than five keys to be pressed can still be played.

At the time of going to press we haven't been able to obtain one because they're short of stocks, however Ms Green of the company assures me that by now their stockroom will be overflowing. The information given to me claims that movement in seventeen directions is possible, I will be most interested to put this through it's paces!

A full through port is included and it is claimed to be microdrive compatible, the usual tip at the top of the interface is there and I would also be interested in trying it for compatibility with one ▶

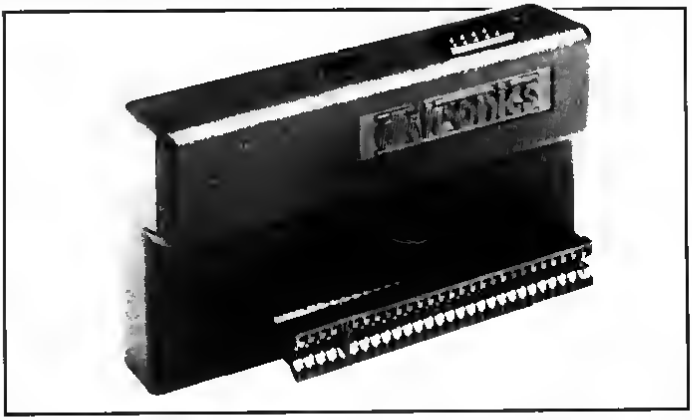

of their superb looking keyboards

Protocol 4 AGF Hardware £30.95

The very latest unit from AGF, this is an interesting looking interface. It lies flat and is programmed by a set of reprogrammable cards which are snapped into place on the interface.

The device is supplied with three pre-programmed cards to cover Kempston, Sinclair and Protek/AGF (cursor keys). An extra, blank card is supplied for your own use.

This is a great advance on their older interfaces in style and ease of use, however, ZX81 owners will be pleased to know that AGF are to continue producing and selling their old units because, as Mr Fosberry told me personally, the demand by ZX81 owners is as great as that from Spectrum owners.

The unit has a full through port and amazingly, up to five of these can be connected and programmed individually for multiple control! The latest Quickshot II joystick is supported and the socket for the joystick is placed on the side of the unit.

Yet another small but useful extra is a reset button to allow you to turn the computer on and off without having to pull the plug each time with the eventual problems this causes.

Slightly expensive but for the dedicated games player probably well worth the money.

Endnotes

We covered as many interfaces as we would and I'd like to thank all the companies that sent us review units which allowed us to write a more comprehensive and detailed report.

I do realise that as always these are written by people who are giving their own opinions and you may or may not agree with them. Overall we have tried to give you an idea of what is available but really nothing substitutes for trying them for yourself at your nearest store.

There are probably a few companies that we've missed. If they would like to write and tell us, we'll include them in our future features.

Each review was written by the person named at the end, if no name appears then it was reviewed by myself — it's a hard life!

Addresses

AGF Hardware,
26, Van Gogh Place,
Bognor Regis,
West Sussex.

The Cambridge Joystick Interface,
40-42 Hobson Street,
Cambridge CB1 1NL

CCI (Custom Cables International),
Units 2,3 and 4,
Shire Hill Industrial Estate,
Saffron Waldon,
Essex CB11 3AQ

Datel Electronics,
Unit G,
Fenton Industrial Estate,
Dewsbury Road,
Fenton,
Stoke-on-Trent

DK'Tronics Ltd.,
Unit 6,
Shire Hill Industrial Estate,
Saffron Waldon,
Essex CB11 3AQ.

Downsway Electronics (UK) Ltd.,
Depot Road,
Epsom,
Surrey

East London Robotics Ltd.,
Gate 1,
Royal Albert Docks,
London E11

Fox Electronics Ltd.,
141 Abbey Road,
Basingstoke
Hampshire

Kempston Electronics,
Unit 30,
Singer Way,
Woburn Road Industrial Estate,
Kempston,
Beds. MK42 7AF

Pace Computing,
28, Burwood Grove,
Meyling Island,
Hampshire

Protek Computing Ltd.,
14 Young Square,
Brucefield Industrial Estate,
Livingston,
West Lothian.

Rainbow Electronics,
Glebe House,
South Leigh,
Witney,
Oxfordshire OX8 6XJ.

RAM Electronics (Fleet) Ltd.,
106 Fleet Road,
Fleet,
Hampshire GU13 8PA.

Sinclair Research,
Stanhope Road,
Camberley,
Surrey GU16 3PS.

Solidisk Technology Ltd.,
Sinclair Computer Add-Ons Division,
17 Sweyne Avenue,
Southend on-Sea,
Essex SS2 6JG.

Stonechip Electronics,
Unit 9,
Brook Trading Estate,
Deadbrook Lane,
Aldershot,
Hants. GU12 4XS.

Voltmace Ltd.,
Park Drive,
Baldock,
Hertfordshire SG7 6ES.

Car Costs

Is it time to retire the family Rolls? Peter Lawrence drives from Norwich with his program for the ZX81 or Spectrum.

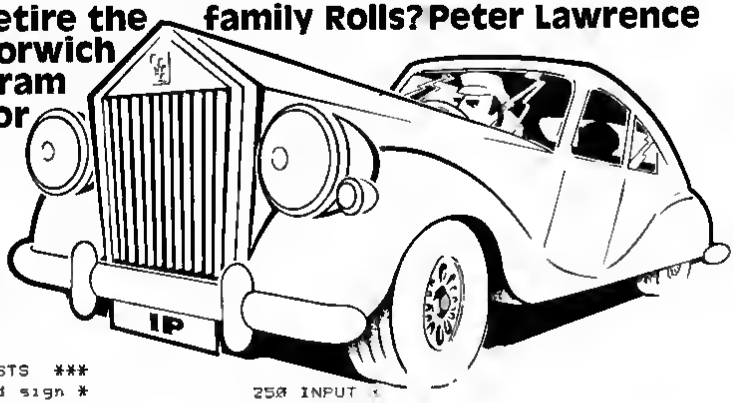

This is a simple but accurate and useful program for all motorists (or sons and daughters of motorists) to check upon how much the gasoline guzzling beastie is actually costing you. Note that the # sign in the listing should be replaced by the pound sign. Happy motoring!

```
 10 REM ***  CAR COSTS  ***
 11 REM * # is pound sign *
 12 REM ********************
 20 LET Y=365
 30 PRINT "MONTHLY CAR COSTS"
 40 PRINT
 50 PRINT "No. of days in month
  ="; .
 60 INPUT H
 70 PRINT H
 75 PRINT
 80 PRINT "MONTHLY FUEL CONSUMP
TION"
 85 PRINT
 90 PRINT "Miles travelled
  =";
100 INPUT M
110 PRINT M
120 PRINT "Litres petrol purcha
sed=";
130 INPUT L
140 PRINT L
150 PRINT "Cost of petrol
  =";
160 INPUT P
170 PRINT "#";P
180 LET G=L*.22
190 LET Z=INT (M/G*100+.5)/100
200 PRINT
210 PRINT Z;"Miles per gallon"
220 PRINT
230 PRINT "ANNUAL COSTS"
235 PRINT
240 PRINT "Car tax
  =";
250 INPUT X
260 PRINT "#";X
270 LET A=X
280 PRINT "R.A.C. subscription
  =";
290 INPUT R
300 PRINT "#";R
310 LET A=A+P
320 PRINT "Car insurance
  =";
330 INPUT I
340 PRINT "#";I
350 LET A=A+I
360 PRINT "Repairs and service
  =";
370 INPUT S
380 PRINT "#";S
390 LET A=A+S
400 PRINT "Tyre replacement
  =";
410 INPUT T
420 PRINT "#";T
430 LET A=A+T
440 PRINT "Depreciation
  =";
450 INPUT D
460 PRINT "#";D
462 PRINT
465 LET A=A+D
500 LET C=A/Y*M
510 LET B=C+P
520 LET E=B/M
530 PRINT "Car running cost=";I
NT (E*10000+.5)/100;"p per mile"
```

Portability 2

M P Moore of Petron Electronics describes the construction of a parallel I/O board for use with the Portability interface

In this issue we show you how to build a parallel interface board to be used in conjunction with the interface published in the last issue. The Parallel In/Out Board has two 8 bit input and two 8 bit output ports. We also describe an LED board, which allows your computer to light LEDs (Light Emitting Diodes) from the output ports, and another board containing four relays which can be switched on and off by your computer.

Up to four of these parallel interface boards could be connected to the interface giving a total of 64 input and 64 output lines (eight, 8 bit input ports and eight, 8 bit output ports). The really dedicated enthusiast could use the interface to control 64 relays.

Important note

Since publication of the first part of this project, the design of the PCB has been changed slightly. Although the ICs on the main interface board still draw their 5 volt supply from the computer, this 5 volt line is no longer taken to the four I/O sockets; instead the 9 volt line is used, requiring each additional board to have its own 5 volt regulator. This is to reduce the load on the computer's 5 volt regulator. In addition — as a safety precaution — the positions of $\overline{PWR}$ and GND have been swapped over. Table 1 gives the revised I/O socket connections. All PCBs supplied by Newtech contain the altered circuit.

The revised copper foil layout for the main interface PCB is shown in Fig. A.

Four circled areas indicate where changes have been made. The link next to SK4 is dispensed with and pin 14 of each extension socket is taken to +9V rather than +5V via a new track which runs down the right-hand side of the PCB. +5V now goes no further than the link above IC2. 0V/GND is taken to pin 1 of each extension socket rather than pin 2 and pin 2 is connected to $\overline{PWR}$, the port write line.

For those who have already made their own PCB from the layout in the first part of this project, Fig. B shows the alterations that must be made.

There are three tracks (marked with an X) to be cut and three new links marked A, B and C to be fitted. Use insulated wire, especially for the 9V feed from the edge connector. The points where new links must be fitted are marked, A, B and C; connect them so that A joins to A, B joins to B and C joins to C. Note that one end of A connects to pin 2 of SK1, one end of B connects to pin 1 of SK4 and that C (the 9V feed) connects to SK4 pin 14 and the previously unused 9V pin of the edge connector.



SKT	PIN 7	PIN 8
1	PE1	PE6
2	PE2	PE3
3	PE6	PE7
4	PE5	PE4

Table 1 Revised I/O socket connections

Parallel board connections

Fig. 1 shows how the parallel In/Out board could be connected.

Output port A is shown connected to an LED board containing 8 LEDs. +5V (VCC) and 0V (GND) are taken to the board along with the eight outputs.

0.1 inch PC plugs and sockets (supplied with the kit) are used to connect the parallel board to external circuits.

Each output is connected via a resistor to an LED. The LED can be connected so that they indicate either a 1 or a 0. If they were wired to indicate a 1 and the number 200 (for instance) were to be output to port A, the

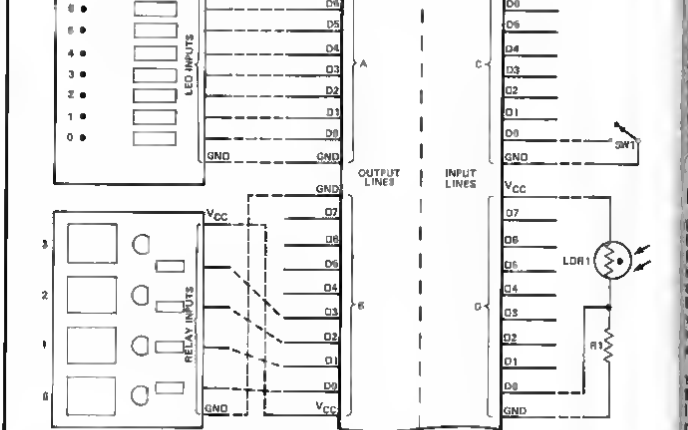

Figure 1 Parallel I/O board schematic diagram

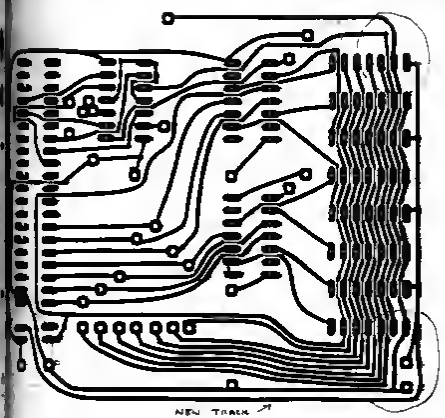

Figure A

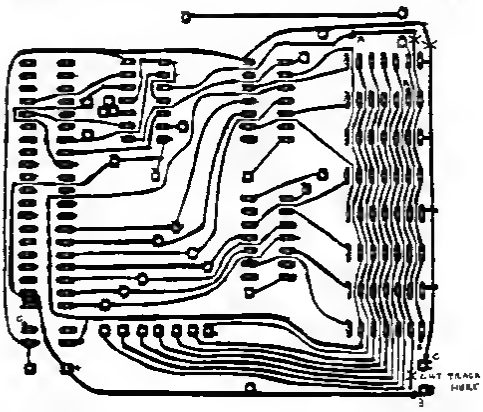

Revised PCB foil pattern

Figure B

LEDs 7, 6 and 3 would light since 200, in binary code is 1100 1000

The LED board could be used to display numbers in the range 0 to 255 in binary code, output to port A (or B)

Output port B is connected in a similar way to a relay board consisting of four miniature relays – again, note the VCC and GND connections. Outputting a 1 to a relay will turn that relay on. If you wished to switch relay2 on, you would output the number 4 which is 0000 0100 in binary, to switch on relays 1 and 2 you would output the number 6 which is 0000 0110.

A method of connecting external switches to the board is shown at port C. Unconnected inputs will always read as 1. When the switch is closed (on), 0 will be taken to GND which is logic 0 and the value read in from port C will be 1111 1110 or 254. With the switch open (off) the value returned would be 1111 1111 or 255.

Light detector

Port D is shown connected as a light detector. An LDR is a Light Dependant Resistor, the resistance of this component alters with the ambient light level. At low light levels the LDR will exhibit a high resistance which falls as the light increases.

LDR1 and R1 are wired so that when the light level is high D0 will be at logic 1 and as the light level falls and the resistance of the LDR rises above that of R1, D0 will be pulled to GND (logic 0). This circuit could be used as a daylight detector which will return the value 255 in full daylight and 254 in darkness. Since daylight comes and goes gradually there will be a certain point where LDR1 and R1 have about the same resistance and D0 will alternate between 0 and 1; software written for use with the circuit would have to take this into account.

Programming the parallel interface board

The parallel interface board connects to the main interface published in the last issue via a 14 way DIP jumper cable. Depending on which of the four DIP sockets on the main board is used, each of the ports on the parallel board will have a number to identify it (See Fig 2)

Each port is marked A,B,C or D. Table 2 gives the number of each port, A, B, C & D depending on the DIP socket used.

It is important to ensure that the DIP jumper plugs are the same way round on each board, the wire at the *top* end of the socket on the main interface board must be the wire at the *top* end of the socket on the parallel board. Since multicolour ribbon cable is used for the jumper cables, this is not difficult to check.

Let us suppose that the DIP jumper cable connects the parallel interface board to main interface socket 1.

For the SPECTRUM

To output data to the parallel output port marked 'A' (Fig. 2) and to input data from port 'D':

OUT 65407, 254 (selects ports A & D)
OUT 65471, x (outputs the contents of variable x to port A)
LET A = IN 65471 (reads the data on the input port D to variable A)

The following program will display a count from 0 to 255 in binary code on 8 LEDs connected to output port A.

```
10 OUT 65407, 254
20 FOR F = 0 TO 255: OUT
   65471,F: PAUSE 20
   NEXT F
```

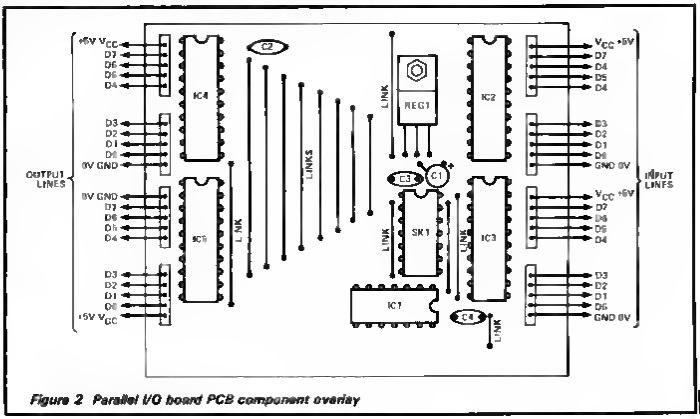

Figure 2 Parallel I/O board PCB component overlay

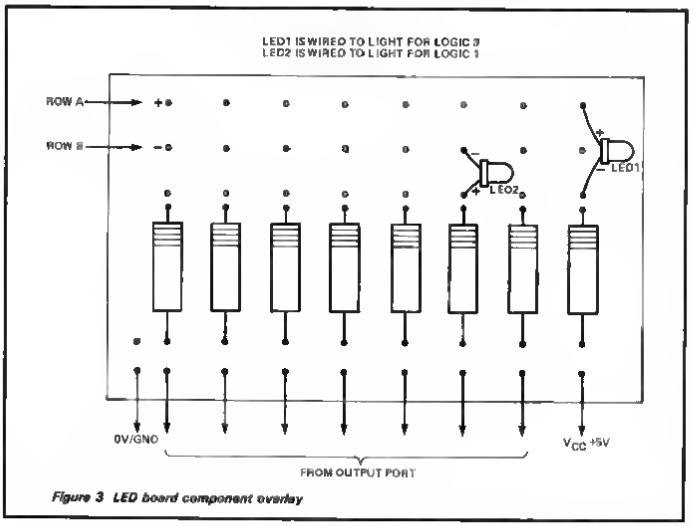

Figure 3 LED board component overlay



Figure 4. LED connections

(The PAUSE command is simply to slow the count down so you can see it.)

For the ZX81

Since the ZX81 has no IN or OUT commands, the short machine code subroutines demonstrated in part 1 of this project must be used.

The following program will count from 0 to 255 and will display the count on 8 LEDs connect to output port A

```
1 REM (machine code)
10 POKE 16515,254
20 RAND USR 16514 (to
   select device 254 i.e
   ports A and D
30 FOR F = 0 TO 255
40 POKE 16520,F
50 RAND USR 16519 (to
   output the value of F,
   POKEd in line 40)
60 NEXT F
```

To input data use

POKE 16515,n (where n is the device number)
LET A = USR 16524

The data on the inputs of the selected input port will be returned in A. If the number POKEd to 16515 were 253, then data would be input from port C (still assuming the parallel board is connected to SK1 on the main interface board)

Parallel input/output board construction

See Fig. 2 (PCB Overlay)

Using thin, single core insulated wire, solder wire links between the points marked, one at a time. There are fourteen links in all. Be very careful not to allow solder to bridge across any of the tracks which run close to to link pads.

IC sockets should be used for all five ICs plus one for the DIL plug from the main interface board. Solder these in one at a time, again watching out for solder bridges onto tracks which pass between IC pins.

The voltage regulator, Reg 1, should be soldered next. It is very important to mount this component the right way round (otherwise the board will not work). Insert is so that the flat, all-metal side faces IC1 and SK1.

Next solder capacitor C1. This is a large tubular component, it must be mounted the right way round (see overlay). C1 will have one lead marked (either the negative lead (−) or the positive lead (+) so you can see which way round it should go. Don't push this component right into the board, rather leave it standing about ¼" above the PCB surface. It is a good idea to put a small piece of insulating tape around C1's leads so that they will not short against each other or, against any other component.

Solder in the three 0.1µF capacitors C2, C3 and C4. These components can be mounted either way round.

Finally solder the right angle PCB plugs (the shorter end goes through the PCB leaving the long ends pointing out to the sides of the board). There are eight of these plugs altogether, each plug consisting of five pins.

Before plugging in the ICs, check the board thoroughly to ensure that all connections have been soldered and that there are no bridges across any of the PCB tracks.

Now plug the ICs in, one at a time, making sure you mount them the right way round. The top end of each IC is marked with a deep notch or circle cut in to the plastic, these correspond with the "top ends" marked on the PCB overlay. If a circle is cut into each end, and there is no notch, the deeper circle marks the top end.

Construction of the LED board

This board has been designed to allow LEDs to be mounted in such a way that they will either indicate a logic 1 state or a logic 0 state. See Fig. 3.

First of all, solder the eight resistors (330R). These are small tubular components with coloured bands (indicating their value). They can be mounted either way round.

LED1 is connected between the top row of holes (Row A) and its associated resistor and will light up when the output pin/line connected to the other end of its resistor is at logic 0.

LED2 is connected between

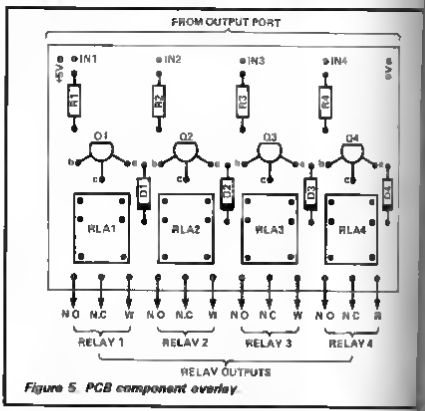

Figure 5. PCB component overlay

he middle row of hole (Row B) and its resistor, it will light up when the logic level on the other end of its resistor is 1

It is very important that LEDs be mounted the right way round Look at Fig 4

If you hold an LED up to the light you will be able to see the ends of its leads inside the plastic case One of these will resemble a 'cup' and the other will appear to be a smaller, shorter arm The 'cup' is always the Cathode or negative (–) terminal while the 'arm' is the Anode or positive (+) terminal

When you solder the LEDs in, you may choose any combination of logic level indication (ie ns n LED1 or LED2) though it is usually more useful to have all eight LEDS indicating the same logic level (1 or 0)

Remember that when an LED is connected between row A and its resistor the positive lead MUST go to row A the negative lead to the resistor When an LED is connected between row B and its resistor the negative lead MUST go to row B the positive lead to the resistor

Don t experiment by connecting an LED between row A and row B – at best you will destroy the LED

When you have decided how you wish to mount the LEDs, insert and solder them, one at a time

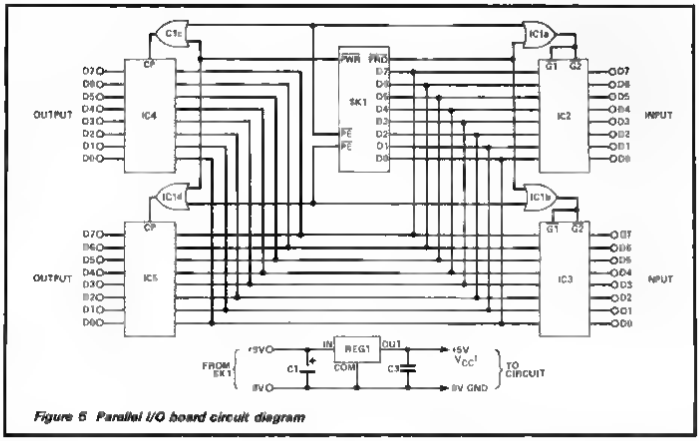

Figure 5 Parallel I/O board circuit diagram

Using the relay board

Each relay has three contacts see Fig 5 marked N O (Normally Off), N C (Normally Connected) and W (Wiper or common contact)

When a relay is de-energised (switched off) the wiper makes contact with the N C terminal When energised, the wiper connect to the N O terminal instead

You can switch small DC motors, bulbs etc on and off with these relays but they must NOT be used to switch the mains under any circumstances

Relay board construction

See Fig 5

First of all insert and solder the four relays

Each relay has a driver transistor (TR1 to TR4) these are small, black plastic encased components with three leads They should be mounted so that the flat side of the transistor faces away from the relay, the three terminals being taken through the three holes as shown The middle transistor lead (C – the Collector) is slightly nearer the relay than the other two leads (B – Base and E – Emitter) Solder the transistors taking care to mount them the right way round

Next, diodes D1 to D4 should be fitted These are tiny glass-cased components with a black band near one lead which indicates the Cathode or negative lead Be sure to mount these components the right way round In each case, the Cathode is the lead nearest to the relay

Finally, insert and solder resistors R1 to R4 (560R) These components are larger than the four diodes and have coloured bands which indicate their value

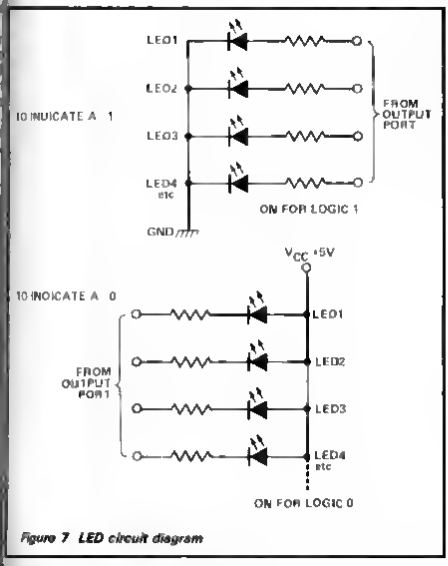

Figure 7 LED circuit diagram

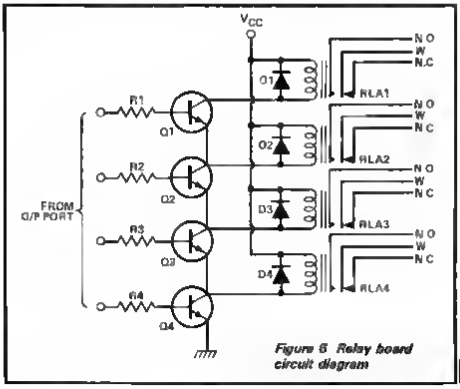

Figure 6 Relay board circuit diagram

How it works

See Fig 8

ICs 2 and 3 are 81LS97 octal tri-state buffers which have their outputs connected to the computer data bus. When PRD and (one) PE line go low, one of these buffers will be enabled, causing the data on its inputs to be placed on the data bus. Should both PE lines go low (as could happen), the result would be indeterminate since this would give rise to data bus contention (Not very desirable).

ICs 4 and 5 are octal tri-state latches whose output enable lines are tied to GND. Data is latched into these 74LS374 chips on the low to high transition of CP, the clock input driven by a PE line and PWR.

The board's 5 volt line is derived from the computer 9V line by a 5 volt regulator. Since this regulator will tend to run hot, especially if many relays are to be controlled by the computer, it is a good idea to fit a small heatsink to it, in any case if very many relays are to be controlled, a larger external power supply would have to be used.

Buylines

All the components used in this project with the exception of the PCBs are available through electronic component suppliers who advertise regularly in electronics magazines.

The PCBs are available from Newtech (Micro) Developments Ltd., 1, Courtlands Road, Newton Abbot, Devon. The Parallel Board costs £4.50, the LED board 85p, and the Relay Board £1.05.

Newtech will also supply complete kits of parts for this project which include the PCB and all components. The Parallel Board costs £14.95, the LED board £2.50, and the Relay Board £11.95. Postage is extra at 30p per order.

Table 2

	PORT			
	OUT		IN	
SKT	A	B	C	D
1	254	253	253	254
2	247	251	251	247
3	127	191	191	127
4	239	223	223	239

Parts list

Parallel In/Out Board

IC1	74LS32
IC2,3	81LS97
IC4,5	74LS374
REG 1	7805 + 5V regulator
C1	220uf 16v electrolytic
C2,3,4	0.1uf ceramic
4, 20 pin IC sockets	
2, 14 pin IC sockets	
8, 5 way PC plugs and sockets	
1 PCB	

LED Board

LED 1-8,	TIL 209 or equivalent
R1-8	330R 5%
1 PCB	

Relay Board

RL1-4	Subminiature PC mounting relays — 5 volt 56R
TR1-4	2N3704
D1-4	1N4148
R1-4	560R 5% ½W
1 PCB	

Card Corner Patience III

This issue, Colin Gooch presents us with his version of 'eleven-up' Patience.

Card games are often good starting points for micro simulations. In particular Patience games are good for they are already designed for one player. I find programming them a fascinating insight into the working of the brain. It is amazing how many factors we take into account when we so simply look at a card and decide that it will go'. The same decision may well take several subroutines each involving several variables and loops.

Criticism is sometimes levelled at such simulations that they are pointless because you can just as easily use a pack of cards. That may be true, but it has many parallels in other branches of life. Why get out the vacuum cleaner when it might be just as quick to use a brush? Anyway a table to play on is not always available, and if you are ill in bed its much easier to balance a spectrum on your knee than a large tray.

One major decision to take is to decide just how much we allow the computer to do. It would be quite easy to write a program and simply watch the Spectrum play by itself. It's best I believe to allow the player to do quite a lot, but to reject faulty inputs. With an actual pack of cards you can go back and correct your error if for instance you messed a heart for a diamond. You cannot do this without breaking into a progam so it is best to avoid the problem. At the same time we need to allow unwise but not illegal moves.

I hope you enjoy the intricacies of long strings of cards.

Happy programming.

Ray Elder

11 Up Patience

This is one of the simplest of the great family of patience games, and depends entirely on the run of the cards, but it can still be quite frustrating and will practice your powers of mental arithmatic!

Nine cards are dealt out and you must endeavour to get rid of the rest of your cards by covering either pairs of cards that total 11 or a run of J,Q,K. If you can't go you may deal one card on the centre. If you are still stuck then you must resign.

The first thing that we must do before programming a card game is to decide on the presentation of the cards. A nine by five block of print positions will allow for a very realistic layout but unfortunately restricts the number of cards that can be shown in full to a maximum of two rows of four (or five if you omit gaps between). This game needs a display of nine cards and to allow for an attractive deal I have made a five by seven matrix the order of the day. This means that the pips on the cards are not in quite the traditional places but I think they are still acceptable.

The cards are represented in memory by five characters and are held in a main string P$ in which they are dealt and shuffled. Each card is made up of a first character giving its 'name', the next two its value, the next the suit and finally the colour.

Programme operation

When loaded the programme will auto run and set up the graphics using line 1760 onwards. The main programme will then 'RUN'.

The first operationel line is 1020 which produces two defined functions to locate the printing of the cards to x and y coordinates. The main loop, which is quite long starts at 1040. It first of all gives you the choice of instructions held in lines 1600 onwards, then initialises some variables (line



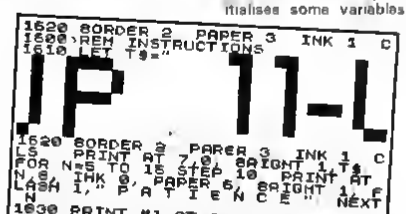

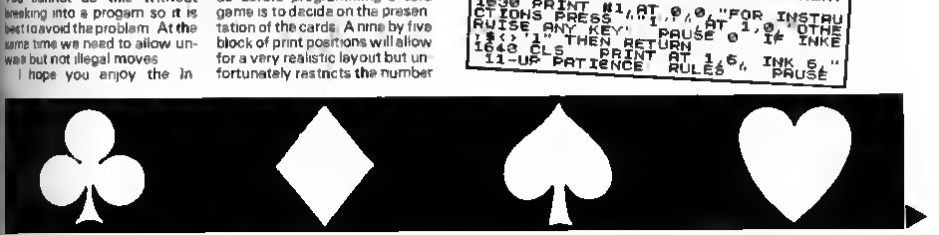

1710 and sets up and shuffles the pack in lines 1400 and 1490

Line 1090 will print out a hand using the card printing subroutine at line 1250. You're then asked to input your move. The lines from here up to 1210 check that this is a valid combination. If all is well then your move is printed and we loop back to the beginning. If it is a faulty input you will be asked to enter again. If you have run out of cards or resigned you will be directed to the end game routine at line 1510

The spectrum keeps track of what cards are dealt by using an array R$. I have done this rather than using the SCREEN$ function to read the value as '10' is a U.D.G. which this will not recognised.

The subroutine to print out the cards runs from line 1250. It breaks down the card into its various components (the string slicing ability is excellent for this purpose) and uses these to print the correct card, the place being given by the two defined functions. Picture cards are shown as letters

Main variables

A	counts out cards in deal
CD	cards played
FA	temporary flag
N	for next loops
T	total value of cards to cover
x,y, z(x)	position on screen values derived from Z$
A$,B$,D$	setting up pack
C$	card being printed
E,F$	components of C$
P$	pack
R$(x)	cards dealt
Z$	your move
T$	title
U$	instructions

Memory

This program will easily fit into 16K

All that remains now is to type it in. Debugging should not be difficult. If you get 'funny' cards then your error is almost certainly from line 1250 onwards. If it's rejecting a legitimate move then its in the main loop..... have PATIENCE and it'll all be OK !

```
1000 REM ////////////////////////
///PATIENCE B  @ C.N,GOOCH//////
//////////////////// 1983 ////////
////////////////////////////////
1010 REM **********************
****GRAPHIC REPPESENTATION******
********************************
****IN LINES WITH USER GRAPHICS
*******THESE ARE SHOWN AS ITALIC
 UPPER CASE**********************
********************************
***FOR THE CHUNKY GRAPHICS THOSE
 UNSHIFTED ARE SHOWN AS ITALIC 1
2345678 AND THOSE SHIFTED AS ITA
LIC LOWER CASE******************
********************************
1020 DEF FN C(Y)=6*(Y=2 OR Y=6)+
12*(Y=9)+18*(Y=3 OR Y=7)+24*(Y=4
 OR Y=8): DEF FN D(Y)=2+6*(X>4)+
6*(Y>4 AND Y<9)
1030 RANDOMIZE : RANDOMIZE
1040 GO SUB 1600: BORDER 4: PAPE
R 4: INK 0: CLS : GO SUB 1710: G
O SUB 1400: GO SUB 1500
1050 REM PRINT STARTING HAND
1060 LET A=1: FOR N=1 TO 44 STEP
 5:: LET X=FN C(A)+2: LET Y=FN D
(A)+7: PRINT AT Y,X; PAPER 6; IN
K 0;" ";A;" ": LET A=A+1: NEXT N
1070 LET A=1: FOR N=1 TO 44 STEP
 5: LET X=FN C(A): LET Y=FN D(A)
: LET C$=P$(N TO N+4): LET R$(A)
=C$(2 TO 3): GO SUB 1260: LET A=
A+1: NEXT N: LET CD=9
1080 LET P$=P$(46 TO )
1090 PRINT AT 21,13; PAPER 5; IN
K 0;"      ";AT 19,13;"CARDS";AT
20,13;"LEFT ";AT 21,15;52-CD: IN
PUT ;AT 0,0;"ENTER POSITION OF C
ARDS TO BE";AT 1,0;"COVERED eg.
35 (0 TO RESIGN)"; LINE z$: IF Z
$="" THEN GO SUB 1230
1100 IF LEN Z$>3 THEN GO SUB 123
0: GO TO 1100
1110 DIM Z(LEN Z$): FOR N=1 TO L
EN Z$: IF CODE Z$(N)<48 OR CODE
Z$(N)>57 THEN GO SUB 1230: GO TO
 1100
1120 LET Z(N)=VAL Z$(N): NEXT N
 : IF LEN Z$=1 AND Z$(1)<>"9" AN
D Z$(1)<>"0" THEN GO SUB 1230: G
O TO 1100
1130 IF LEN Z$=2 THEN LET FA=0:
IF Z(1)=Z(2) THEN GO SUB 1230: G
O TO 1100
1140 IF LEN Z$=3 THEN LET FA=0:
IF (Z(1)=Z(2))+(Z(1)=Z(3))+(Z(2)
=Z(3)) THEN GO SUB 1230: GO TO 1
100
1150 IF VAL Z$=0 THEN LET RES=1:
 GO TO 1510
1160 IF FA THEN GO SUB 1230: GO
TO 1100
1170 IF LEN Z$=1 THEN LET FA=FA+
1
1180 FOR N=1 TO LEN Z$: LET T=T+
VAL R$(Z(N)): NEXT N: IF T<>11 A
ND T<>36 AND LEN Z$<>1 THEN GO S
UB 1230: LET T=0: GO TO 1100
1190 IF T=11 AND LEN Z$<>2 THEN
GO SUB 1230: LET T=0: GO TO 1100
1200 IF T=36 AND LEN Z$<>3 THEN
GO SUB 1230: LET T=0: GO TO 1100
1210 FOR N=1 TO LEN Z$: LET C$=P
$(1 TO 5) : LET P$=P$(6 TO ): LE
T CD=CD+1: IF CD=52 THEN GO TO 1
510
1220 LET X=FN C(Z(N)): LET Y=FN
D(Z(N)): GO SUB 1260: LET R$(Z(N
))=C$(2 TO 3): NEXT N: LET T=0:
GO TO 1090
1230 INPUT ;AT 0,0;"INPUT UNACCE
PTABLE";AT 1,0;"PLEASE ENTER AGA
IN"; LINE Z$: IF Z$="" THEN GO T
O 1230:
1240 RETURN
1250 REM PRINT CARD
1260 INK VAL C$(5): LET E$=C$(4)
: LET F$=C$(1)
1270 PAPER 7: FOR M=Y TO 8+12*(Y
/10)+6*(Y=8): PRINT AT M,X+1; IN
```

```
K 0;"      ": NEXT M: PRINT AT Y,
X+1;F$;AT Y+6,X+5;F$
1260 PRINT AT Y+1,X+1;E$;AT Y+5,
X+5;E$
1290 IF (F$="A")+(F$="3")+(F$="5
")+(F$="9") THEN PRINT AT Y+3,X+
3;E$
1300 IF (F$="2")+(F$="3") THEN P
RINT AT Y+2,X+3;E$;AT Y+4,X+3;E$
1310 IF (F$="4")+(F$="5")+(F$="6
")+(F$="9")+(F$="A") THEN PRINT
AT Y+2,X+2;E$;AT Y+2,X+4;E$;AT Y
+4,X+2;E$;AT Y+4,X+4;E$
1320 IF (F$="6")+(F$="7") THEN P
RINT AT Y+1,X+2;E$;AT Y+1,X+4;E$
;AT Y+3,X+2;E$;AT Y+3,X+4;E$;AT
Y+5,X+2;E$;AT Y+5,X+4;E$
1330 IF (F$="7") THEN PRINT AT Y
+3,X+3;E$
1340 IF (F$="8")+(F$="9")+(F$="A
") THEN PRINT AT Y+1,X+2;E$;AT Y
+1,X+4;E$;AT Y+5,X+2;E$;AT Y+5,X
+4;E$
1350 IF (F$="A") THEN PRINT AT Y
+3,X+2;E$;AT Y+3,X+4;E$
1360 IF F$="J" THEN PRINT AT Y+1
,X+3;"cc";AT Y+2,X+4;"e";AT Y+3,
X+4;"e";AT Y+4,X+2;"58e";AT Y+5,
X+2;"132"
1370 IF F$="Q" THEN PRINT AT Y+1
,X+2;"4cg";AT Y+2,X+2;"58e";AT Y
+3,X+2;"58e";AT Y+4,X+2;"54e";AT
 Y+5,X+2;"172";AT Y+6,X+3;"12"
1380 IF F$="K" THEN PRINT AT Y+1
,X+2;"e5e";AT Y+2,X+2;"eh";AT Y+
3,X+2;"he";AT Y+4,X+2;"eh";AT Y+
5,X+2;"e5e"
1390 RETURN
1400 REM SET UPPACK
1410 LET A$="": LET D$="A0129230
3404505606707908090A10J11912K13"
1420 PRINT AT 8,9; INK 1; PAPER
5;B$;S$;B$;S$;AT 10,10; FLASH 1;
 PAPER 7; INK 2;"PREPARING PACK"
;AT 12,9; FLASH 0; PAPER 5; INK
1;S$;B$;S$;S$
1430 FOR Q=1 TO 39 STEP 3: FOR P
=1 TO 4: LET COL=0: IF P=1 OR P=
3 THEN LET COL=2
1440 LET A$=A$+D$(Q TO Q+2)+B$(P
)+STR$ COL
1450 NEXT P: NEXT Q
1460 CLS : PRINT AT 8,9; PAPER 5
; INK 1;S$;B$;B$;S$;AT 10,12; PA
PER 7; FLASH 1;"SHUFFLING";AT 12
,9; PAPER 5; INK 1; FLASH 0;B$;S
$;S$;B$
1470 FOR N=1 TO 60: LET A=1+(5*(
1+INT (RND*30))): IF n/2=INT (n/
2) THEN LET A$=A$(A TO A+4)+A$(
TO A-1)+A$(A+5 TO ): BEEP .01,N
1480 IF n/2<>INT (n/2) THEN LET
A$=A$( TO A-1)+A$(A+5 TO )+A$(A
TO A+4): BEEP .01,N+10
1490 NEXT N: LET P$=A$: CLS : RE
TURN
1500 INPUT "PRESS ENTER TO CONTI
NUE"; LINE Z$: BEEP .05,10: RETU
RN
1510 REM END GAME
1520 PAPER 5: INK 1: FOR N=12 TO
 21: PRINT AT N,0; PAPER 5;"
                          ": N
EXT N
1530 IF MES THEN PRINT AT 13,1;"
BAD LUCK: THE CARDS DID NOT ";AT
 14,1;"RUN YOUR WAY": FOR N=-10
TO -30 STEP -1: BEEP ABS N/100,N
: NEXT N
1540 IF NOT RES THEN PRINT AT 13
,1; FLASH 1;"''''' WELL DONE '''
''''";AT 14,1; FLASH 0;"YOUR PATI
ENCE IS REWARDED": FOR N=1 TO 3:
 FOR M=10 TO 40 STEP 3: BEEP .01
,M: NEXT M: PAUSE 10: NEXT N
1550 PRINT AT 16,3;"YOU MAY";AT
17,5;"1)PLAY AGAIN";AT 18,5;AT 1
9,5;"2)FINISH PLAYING"
1560 PAUSE 0
1570 IF INKEY$="1" THEN BORDER 4
: PAPER 4: INK 8: CLS : GO SUB 1
710: GO SUB 1710: GO SUB 1460: G
O SUB 1500: GO TO 1850
1580 IF INKEY$="2" THEN CLS : PR
INT AT 10,0;"START TAPE TO LOAD
NEXT GAME": LOAD ""
1590 PAUSE 0: GO TO 1570
1600 REM INSTRUCTIONS
1610 LET T$="      hh88hh88888h88
8h88hhhh888888888888h888h88888h88
8h888h888h8888888888888h888h88888
8h888h888h8888888888888h888h88888
8h888h888h8888888888888h888h88888
8h888hhhh888888888888h888h8hhh8h8
8h888h888888888888888h888h88886h8
8h888h888888888888888h889h888888hh
h888h88888 888"
1620 BORDER 2: PAPER 3: INK 1: C
LS : PRINT AT 7,0; BRIGHT 1;T$:
FOR N=5 TO 15 STEP 10: PRINT AT
N,8; INK 0; PAPER 6; BRIGHT 1; F
LASH 1;" P A T I E N C E ": NEXT
 N
1630 PRINT #1;AT 0,8;"FOR INSTRU
CTIONS PRESS ""1""";AT 1,0;"OTHE
RWISE ANY KEY": PAUSE 0: IF INKE
Y$<>"1" THEN RETURN
1640 CLS : PRINT AT 1,5; INK 6;"
 11-UP PATIENCE:RULES ":PAUSE100
```

```
1650 DIM U$(6,30): LET U$(1)="NI
NE CARDS WILL BE DEALT OUT": LET
 U$(2)="YOU MUST COVER EITHER :-
": LET U$(3)="TWO NON PICTURE CA
RDS TOTALING": LET U$(4)="ELEVEN
 (ACE = 1) OR": LET U$(5)="A RUN
 OF J-K-Q ": LET U=5
1660 GO SUB 1690: GO SUB 1500: L
ET U$(1)="IF YOU CAN'T MOVE THEN
 YOU MAY": LET U$(2)="DEAL A SIN
GLE CARD INTO THE": LET U$(3)="C
ENTRE: CARD (9)": LET U$(4)="IF
YOU ARE STILL UNABLE TO": LET U$
(5)= "PLAY THEN YOU HAVE FAILED
AND": LET U$(6)="MUST RESIGN": L
ET U=6
1670 GO SUB 1690: GO SUB 1500
1680 RETURN
1690 FOR N=2 TO 17: PRINT AT N,1
; PAPER 5;"
                ": NEXT N
1700 LET E=1: FOR N=4 TO 3+(U*2)
 STEP 2: FOR M=1 TO 30: PRINT AT
 N,M; PAPER 7; INK 1;"*": PAUSE
2: PRINT AT N,M; PAPER 5;U$(E,M)
: BEEP .01,0: NEXT M: LET E=E+1:
 NEXT N
1710 REM INIT
1720 LET A=1: LET CD=0: LET T=0:
 LET FA=0: LET RES=0
1730 DIM R$(9,5)
1740 LET B$="RDCF"
1750 RETURN
1760 REM GRAPHICS
1770 BORDER 2: CLS : PRINT AT 10
,2;"STOP THE TAPE PLEASE"
1780 RESTORE 1800: FOR N=0 TO 4:
 FOR M=0 TO 7: BORDER M: BEEP .0
1,N

1790 READ A: POKE USR CHR$ (97+N
)+M,A: NEXT M: NEXT N: RUN
1800 DATA 0,94,82,82,82,82,94,0
1810 DATA 0,16,56,124,254,124,56
,16
1820 DATA 0,108,254,254,124,124,
56,16
1830 DATA 16,56,124,124,254,214,
84,16
1840 DATA 0,56,56,16,214,254,214
,16
1850 RUN
9990 SAVE "patience3" LINE 1760
9992 CLS : PRINT "SWITCH PLUGS A
ND REWIND TO ''VERIFY.   START
TAPE"
9993 VERIFY "patience2": CLS : P
RINT "ALL OK"
```

Designs For Living

Colin Christmas takes a further look at computer art.

Still hooked on Graphics? Well don t be afraid to admit it some of us addicts are often misteken for respectable members of society and some of us are regular readers of *ZX Computing* And while we're on the subject, it's worth a reminder to check back over the past three or four issues of the magazine to see just how much there is to be getting on with for the more enthusiastic programmer who really wants to come to grips with the theoretical and technical aspects of using the graphics and design potential of the micro

I have great respect and admiration for such enthusiasts If I wore one, I'd raise my hat to them I don't, so this vote of thanks will have to do Other enthusiasts such as myself tend to start about half way through the process In other words, when most of the herd work has been done and the programs and the hardware heve been produced Lazy? Incompetent? Possibly, but it takes all sorts

In the last issue I looked at the growing potential of graphics pads generally and of the RD Digitel Tracer and Dream Software's CAD package specifically with reference to grephics and design work However two other more established tools for the graphics design specialist also merit serious consideration

La plume de ma micro

Light pens for use by Micro users have been around for a long time now Opinions as to their usefulness and value for money vary of course Recently I've been using the LIGHT PEN produced by DK TRONICS for the 16 and 48K Spectrum

The package consists of a program on cassette an instruction booklet the pen itself and a control interface which is plugged into the back of the computer

The Interface is compact and well designed and fits neatly and reassuringly into the port The metre long lead from the pen is fitted with a jackplug which plugs firmly into a socket located on the top of the interface housing The booklet in fact is one of the best I've seen It is informative, brief easy to follow and includes a section at the end on "error conditions" which might be encountered

The program contains several routines which enable the user to select from sixteen functions These are displayed as a menu on the bottom two lines of the screen This means the drawing area is always clear In order to select a function once the program has been loaded you simply point the pen at the letter or box displayed on the menu and press any key This is made possible by a machine code routine, one of the several provided

The program uses two variables called "origin" and "target" which need to be positioned on the screen in order to determine the co-ordinates required for drawing lines corners of boxes centres and circumferences of circles, defined arcs and so on The full menu also enables ther user to erase the line, circle, box or whatever has just been drawn, to ink in

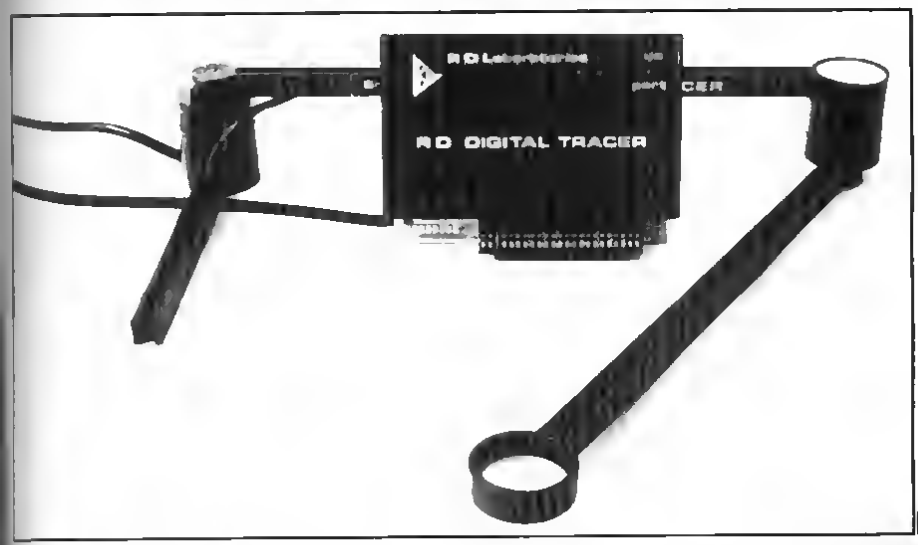

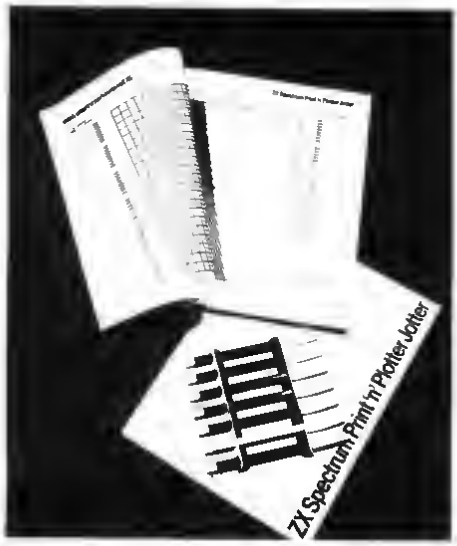

shapes to set border, ink and paper colour, to draw freehand and to clear the screen. Screens can be SAVED or LOADed from tape or can be kept in memory for later recall.

Text can also be inserted into the display. Several of the functions require definite steps which must be followed before the command can be carried out. These are well laid out in the instruction manual. At first it seems as if these separate steps are going to prove tedious and cumbersome but it is surprising how quickly one becomes familiar with them.

Set up

Some people will also find the calibration routine at the beginning of the program annoying. The brightness, contrast and colour controls of the T.V. set they are using may have to be adjusted before the pen can be positioned accurately. I've tried the pen with a Black and White set and this only seems to treble the problems of calibration. I have to confess that I pronounced it of use with Black and White set more nuisance than it was worth.

One last piece of advice, when using a lightpen give some thought to where you position your micro in relation to your screen. Ideally it should go underneath the screen or beside it for most of us on the left. Remember that your main working area is the screen itself and you need to be able to work there freely and without developing arm strain.

High marks then for one of the most recent lightpens to come onto the market. Something I neglected to say is that it has so far proved to be very reliable. Not so I'm afraid with another lightpen I've been trying to use, the TROJAN.

I've read elsewhere that there were problems of compatibility with the early TROJAN Lightpens and the newer spectrums. I'm assured that I've got one of the new lightpens. Sorry Trojan Products, but mine has been giving me grey hairs just where they are not welcome — in amongst the few I've already got. The most common problem being that the program seems to jump between commands or to stick in commands. At best erratic and unreliable, at worst, it seems to crash.

The software solution

A Utility which has also been with us for a while now but which is still capable of straining the imagination is PAINTBOX from PRINT 'N' PLOTTER PRODUCTS. Again it's now only one of the many Graphics packages available from the Spectrum but it's certainly worth serious consideration nevertheless.

It claims to be "ingenious", "unique", "the most imaginative". In the cold light of the monitor screen may I offer Impressive and Comprehensive as more critical alternatives?

This graphics programming tool-kit for the 48K Spectrum consists of a cassette containing two programs one on each side. One to demonstrate some of the results which can be achieved. The other with the machine code program which enables you to do all the work. There is also a twenty eight page book to take you through this supermarket of graphics 'deals'. It contains a lot of detail and the print is small.

Working through it is not easy but it is written well and conveys real excitement and enthusiasm for the tasks involved. In the end it's a smooth ride and it gets easier to use.

The main menu, as you would expect, is displayed once the program is loaded. Before you move on you have a choice of cursor control, keyboard or Kempston Joystick, although other Joysticks may be used. If you then choose Menu 1 — most Games enthusiasts do, you can explore the UDG Editor.

Without affecting the normal character set you can program up to 84 user definable characters and locate this set into your own written programs. This is made possible by storing 4 Banks of characters in memory and recalling them at any time into the usual UDG area by a built in short machine code routine. There is of course a facility of both saving all four banks to tape and loading pre-recorded banks.

Sketch Pad, next off the main menu, puts on the screen a small 'try out' area for related characters before they are used in screen graphics or programs. The current UDG file appears at the top of the screen.

Food for thought

As you continue to work through the Menu like some gourmet in a great restaurant, you discover how to define any or all of the 84 characters available and put them in position, then put them into your own programs.

High resolution screen graphic work can be attempted using the Precision Plotter section of the program. The format will be familiar. Plot, draw, fill, erase, circle, radiate and arc together with choice of ink cursor and with some difficulty paper colour. The cursor moves smoothly and quite quickly as you work. However, sometimes it is useful to be able to move the cursor with great precision and accuracy. This also is possible by keeping the SHIFT key pressed during movement. I was very impressed with the action and ease with which one could work with this section.

Moving on quickly, the rest of the program offers a Screen Planner where your graphics produced using Precision Plotter can be combined with the UDG's you defined and stored in any or all of the four UDG Banks. Procedures are given for achieving Multiple Screen Files. A short machine code routine used as a memory file, when called, transfers data to the screen as a picture. This data call can be held permanently above RAM TOP and called at any time.

Impressive and comprehensive, it is a fairly powerful Graphics aid above all, it is fun to use and experiment with. The more you use it, the bolder and more adventurous you become.

State of the art

It is usual to talk of exploring the potential of our micros when discussing the hardware and software available for such Graphics and Design. It seems to me that together they offer a challenge to us the users, to explore our own potential to make, create and design.

A challenge not our powers of logical thinking or convergent thinking, but to our powers of divergent thinking. As users it's up to us to take up the challenge. What can we achieve, making use of lightpens, tracers, graphics tool-kits and so on?

It's difficult trying to imagine a young Leonardo da Vinci sitting down with paper, canvas, pens, inks, brushes and paints sucking his thumb and wondering. "Well what do they expect me to do with this lot? There may not be many Leonardos amongst us, but the challenge remains. What CAN we do with this lot?

And I don't just mean Games.

DK'Tronics,
Unit 2,
Shire Hill Industrial Estate,
Saffron Walden,
Essex CB11 3AX.

Print 'n' Plotter Products,
19, Borough High Street,
London SE1 9SE.

Statacom Distribution Ltd, sole UK Distributors of Datafax 3" Disk Drives, proudly announce the introduction of the New Datafax Spectrum Disk Interface.

The Interface connector fits neatly into the rear expansion slot on the Spectrum via a high quality, gold plated card edged connector, and still allows full usage of other peripherals (Printer, Joystick etc).

A system reset button is also included in the Interface connector.

The disk operating system, designed for the Hitachi 3" disk drive uses only 8K of user memory and gives easy to learn commands to run the drive.

The Interface comes complete with Utility Disk and comprehensive Datafax Disk Interface Manual. Also suitable for 5¼" single sided drives.

Statacom Price £75 + VAT

As a special introductory package Statacom offer the Hitachi 3" Disk Drive Unit, complete with Power Supply Unit, Utility Disk, leads and cables plus the new Interface at only £245 + VAT (Normally £271 + VAT)

You saw us at the P.C.W. Show – Now write or phone for details

Generous Dealer Terms available

18 GROVE ROAD
SUTTON, SURREY
Telephone 01 661-2266

Name
Address
Tel

Please tick requirements
Full Brochure Pack
Dealer Information
3"Tech Details
Interface Details

PRISM competition

This is your chance to win a super PRISM Movit!!

Yes! This issue's competition gives you the opportunity to win one of the excellent robots from the PRISM Movit range! We have ten Movits to give away, and all you need to give yourself a sporting chance of winning is a keen eye!

Cast your gaze upon the curious-looking pictures numbered 1-5. Do they look familier? Can you identify them? If you think you can, write down what each object is next to the corresponding number on the coupon supplied. To enter the competition pop the coupon into an envelope, and send it to

PRISM Competition,
ZX Computing,
ASP Ltd,
1, Golden Square,
London W1R 3AB

Please ensure that the envelope is marked PRISM competition, else your entry may not be accepted! (shame!) Also be sure to indicate on the coupon your order of preference, as we have two models of each Movit to give away.

Prism's Movits

Prism Microproducts Limited (to give their full name) who have generously donated this issue's prizes, are probably best known as distributors of the Spectrum. However, PRISM is also a robotics company, hence the Movits range. Prism production and developments manager, Stuart Barnard, outlined the history of the Movit in a recent interview. As he explained: "They (Movits) had been available in Japan for some years, which meant that we were looking at a product which has been completely test marketed and proved before we had even started. When we first began to look at Movits, there were twenty one products in the range. But during the period in which we were formulating our marketing arrangements with the Japanese manufacturer the Movit range had been reduced to six which were suitable for the British market, *and* which gave a full selection of movements and sensory systems.

"With the remaining six Movits, we did extensive field trials and eventually decided that one of the six we originally chose could cause too many problems, as it has a very delicate leg mechanism. This was quite sad because it is Movit called the Avoider1 was potentially the biggest seller but we decided to drop it from the range."

Once the decision had been made on which robots were to comprise the range, the next problem was finding the right market-place for them as Stuart explained — "They're not really toy's although the toy market is very interested in them, and they are so different that they don't really fit into the computer market-place."

Despite such difficultes, Movits have been selling well. "When we first decided to test the market with a little advertising "continued Stuart" we shipped two-hundred Movits from Japan which would cover the demand, or so we thought! However, from that first advertisement we had over six-hundred advance order's. That first two-hundred went within ten days!"

Did PRISM intend to expand the range to include some of the Movits which were not originally chosen for the British market? Mike Richardson, PRISM's PR executive had this to say — "Prism, at the moment, have only taken those five. But, if people go for them as we anticipate, there's obviously going to be a demand. Once someone's got five of them, or whatever, they're going to say 'Well, what else have they got?' So obviously we would like to bring in more!"

Finally, I asked Mike about his own experiences with Movit's. Does he build the kits? — "Well, the thing is with Movits is that they are so addic



Line Tracer II £17.99

The Line Tracer II has 3 wheels driven by 2 DC motors. Control is via an infra red transmitter/receiver



Piper Mouse £19.99

The Piper Mouse has 3 wheels driven by 2 DC motors and is controlled via an ultrasonic transmitter/receiver



Memocon Crawler £34.99

The Memocon Crawler has 3 wheels driven by 2 DC motors. It's motion is under program control and is programmed via a detachable keyboard

Monkey £9.99

The Monkey moves 'tightrope-fashion' along a guiding cord. Motion is via two, alternately moving gripper arms driven by a crank. It is controlled by sounds falling within the audible range ie whistling, clapping etc

Circular £29.99

The Circular has 2 wheels driven by 2 DC motors and is controlled via a hand-held remote controller

five I take them home and think 'Oh well, this won't take long, and you get the construction-plan — which is superb — but you find it's a little bit daunting to start with But when you start to build the thing you get well and truly hooked You find that instead of taking an hour you spend four hours putting the thing together and it's like a really good book — you can't put the thing down and before you know it it's four o'clock in the morning and you've still got to get up for work! '

So if you'd like a Movit, fill in the coupon and enter our competition — NOW!

The Rules

- The competition is open to all UK and Northern Ireland readers of *ZX Computing*, except employees of Argus Specialist Publications Ltd Their printers and distributors, employees of Prism Microproducts Ltd, or anyone associated with the competition
- As long as the correct coupon is used there is no limit to the number of entries from each individual
- All entries must be postmarked before November 30th 1984 The prizes will be awarded to the first ten entries picked at random which bear the correct answers the decision to be made by the Editor of *ZX Computing* No correspondence will be entered into with regard to the results and it is a condition of entry that the Editor's decision is accepted as final
- The winners will be notified by post and the results will be published in a future issue of *ZX Computing*

'Jumbogram' Competition Results

There was a moderate response to the June/July 'Jumbogram' competition which is not in the least bit suprising because it was very tough! However, the forty lucky winners were

Adrian Evarett of Plymouth
David Clifford of Cheltenhem
Herwig Timm of West Germany
Peter Glen from Ashby de la Zouch
B J Kamphues of The Netherlands
Mr K R Foot in Surrey.
Stuart Ferns of Kilmarnock.
Richard Orve in Exmouth
Mr D Jones from Bekhill, East Sussex
Paul Waugh in Coventry.
Mr J Moran from Carterton in Oxon
Mr B E Thomas in Bromley, Kent
Carol Powles of Merthyr Tydfil, Mid Glamorgan
R A Mellor from Walsall, West Midlands
James Phoenix of Middlesborough
P R Shears of Rolleston in Leicestershire
J D Kidd of Clacton in Essex
David Lawley of West Bromwich
Mr N Symes of London
Philip Andrews of London
Mr A Landen of London.
Christopher Pearson of Carlisle in Cumbria
Mick Wilford of Charing in Kent
Robert Hugh Roger of Kilmarnock
Jamie Seymour of Leeds
Colin E Piggot of Leeds
N F Owen of Missenden, Bucks
Shai Kedem of Israel
Keven Denness of Bideford in Devon
K M Walsh of Alnwich in Northern Ireland
Ben Jackson of St Leonards on Sea
Ian Jay of Bristol.
Ian Hilton of Crawley, West Sussex
Tony Buckley of County Durham
K R Foot of Chessington in Surrey
J K Marston of Wimborne in Dorset
Andrew Thomas of Downened in Bristol
R A Bamaby of Sale in Cheshire.
and Andrew Broome of Dollington in Cheshire

Many thanks to all of you who entered the competition It was a tough en — nothing like this issue's PRISM comp, so be sure to enter!!

Write a Pun

The *ZX Computing* write a pun competition prompted one extraordinary entry which, though I am ashamed to admit it, had me baffled This being so, I invited reader's to enlighten me upon the meaning of the following pun, submitted by John Stuart

GOSUB AND THEN ARRAY STEP INK SCROLL OR dREM CODE — DIM Pice & RAND NEW LOAD RED OR.

Three people wrote in with the answer One of the three was Jeremy Snelling from Thundersley in Essex He wrote

Dear *ZX Computing*,
I believe that I can INPUT a suggestion as to the translation of John Stuart's ENTER IN the 'write a pun' competition I have SIN this usical beFOR It is very entertaining and I was stuck to my seat IN the CIRCLE as soon as the curtains were DRAWn and would not (*you missed one there, Jeremy — Ed*) LET myself leave until the INterval 'COS it was so SPECtrum AT ULAr I can't wait to see it again the NEXT time The name of the musical? 'Joseph And His Amazing Technicolour Dreamcoat' by Tim Rice and Andrew Lloyd Weber of course!

Thank your Jeremy, I knew it all along of course Thank you also Mrs J M Benson of Broughton-in-Furness in Cumbria (*ah, Cumbria!*) who also supplied the true meaning, as did Richard Danby from Quarndon in Derby, who says 'It wouldn't have been half as interesting if all he had come up with was CAT$!' Laugh? I thought — well you know what I thought! Each of you should have received something nice by the time you read this

To sign off for this issue, could I just suggest that you all enter our Prism competition. The Movits are excellent, so get out your space, examine the pic's and WRITE!
Jamie Clary





NAME .....

ADDRESS .....

.....

.....

I think that the objects in the *ZX Computing* PRISM Competition are

1) .....
2) .....
3) .....
4) .....
5) .....

'My PRISM Movit order of preference is
(Please number each of the following with a rating from 1 to 5)

- ☐ Line Tracer II
- ☐ Piper Mouse
- ☐ Memocon Crawler
- ☐ Monkey
- ☐ Circular

SPECTRUM BUSINESS GRAPHICS AND OTHER SOFTWARE FROM McGRAW-HILL

PROJECTOR 1

Business Graphics Forecasting and Presentation System

Just enter your data then select the option you want for fast professional full colour graphics. You can add headings notes and captions and store a fantastic 50 or more full screen illustrations in memory!
Key points frames in a bold modern typeface can be mixed in any order with graphics frames for presentations which will run automatically or on your cue. And many other features
Data can be stored on cassette tapes or on microdrive

£13.95 Incl. VAT

SPECTEXT

The Spectrum Word Processor

All the features of a professional word processor – INSERT EDIT MOVE SEARCH AND REPLACE SAVE and LOAD FILE etc with automatic print formatting to any line width and printing on screen ZX printer or full-size printer through a suitable interface
The SPECTEXT suite includes SPECFILE a filing system for addresses or other data and SPECMERGE to produce for example personalised mailings with a standard letter
Cassette software microdrive compatible

£13.95 Incl. VAT

PROFILE 2

Spreadsheet File Handling System

A filing system with sophisticated processing facilities. Your screen is a moving window to a large spreadsheet on which your file is written
Use the processing facilities for calculations and text changes in all or selected records. Sort into order total numeric fields and much more
Save files on cassette tape or on microdrive

£13.95 Incl. VAT

THE SPECTRUM GRAPHICS MACHINE

An Advanced Machine Code Tool Kit

The secrets of high speed high resolution graphics revealed with a tool kit to allow rapid and easy manipulations
The tape of ready made routines for graphics handling provides fast efficient and elegant programs. The 100 page book included gives detailed explanations and complete assembled listing – invaluable techniques and routines for simulations arcade games and educational programming

£13.95 Incl. VAT

McGraw Hill software available from selected branches and computer shops and bookshops everywhere

McGraw-Hill Book Company (UK) Limited, Shoppenhangers Road, Maidenhead, Berkshire SL6 2OL. Tel: (0628) 23431/2

Please send me

PROJECTOR 1	07 084748 7	£13.95
SPECTEXT	07 084713 4	£13.95
PROFILE 2	07 084741 X	£13.95
SPECTRUM GRAPHICS MACHINE	07 084768 1	£13.95

I enclose cheque/postal order
Please charge my Access/Visa/American Express/Diners Card
Card No

NAME

ADDRESS

SIGNED DATE

More exciting games for your ZX

All prices include VAT. Add 75p p&p or call in person at Buffer. Trade enquiries welcome. Visa Access American Express Diners Club

Please send me the following games
☐ Athlete ☐ S Bridge ☐ Music ☐ Adventure
☐ Myst Fair ☐ Pools Pred ☐ Racing Pred
☐ Card Games ☐ Loony Bin

Name

Address

I enclose cheque/PO for
£ ZX

BUFFER MICRO SHOP

310 Pinner Road, North Harrow, Middx HA2 6EH Tel: 01 863 2867
Open Tues-Sat 10.30 to 5.30 (Closed Mon)

Met. Plot

An unusual and impressive way of using the ZX81 and printer from Henley on Thames inhabitant, David Lockyer.

Although this program will need a lot of care to enter it and get it working, it will be time well spent. I have never seen the ZX81/printer used to such an impressive degree. Without further adieu I'll hand you over to David.

Popular magazines for users of home computers often devote page after page to games programs and there is clearly a large market for such software and hardware. I believe that many a home computer buff having mastered the rudiments of his chosen machine, soon finds difficulty in making use of it, he ends up not by computing at all, but by playing 'Space invaders' and the like.

One way to avoid this fate is to combine computing with some other hobby and so heighten the enjoyment gained from both interests. For instance last year I attended a course of lectures on meteorology and found it very instructional to prepare weather forecast charts from the daily broadcasts to shipping made by the BBC. So, when I added a ZX printer to my 16K ZX81 a few months ago I set about writing a program that would print a simple weather chart, and plot on it barometric pressures, wind strength and wind directions to allow me to add isobars with a ball-point pen. The result is the program that follows.

You will need patience and perseverance to enter the program and several cassettes of tape for it is important to SAVE the program at frequent intervals in case of the dreaded ZX-81 crash, the unintentional use of RUN or CLEAR, or just the pressing need to do something else!

Figure 1a shows a print of the graphics that we are hoping to produce, with pressure data, wind strengths and direction arrows plotted. The names of the Coastal Stations and Sea Areas, together with the co-ordinates needed to plot digits and arrows in the relevant positions, are stored in a string array C$(445). Similarly the code that describes each arrow is held in array D$(72). These arrays have to be set up before entering the main program.

First of all, enter as a direct command,

```
POKE 16389,124
```

followed by,

```
NEW
```

to reserve space above RAM TOP for use later by the main program. Now enter Program 1 and RUN it. (This should be your last use of RUN, unless you wish to start all over again!) It will dimension the arrays and let you enter the name of each Coastal Station or Sea Area followed by the three pairs of numbers exactly as listed in Table 1. Once this has been done the program will continue, displaying the data now stored in C$(445). The next part of the program will enter data into D$(72), you must enter all the 72 numbers shown in Table 2, reading from left to right. Again, the data entered will be displayed for checking.

When you are sure that the contents of both arrays are correct delete Program 1 except for line 1 which must always be there in its now changed form, line by line and enter Program 2, which is based on the plotting program given in the ZX printer manual, modified to allow you to 'draw' on the notional 256×256 grid held in array A$(32,256). The plot position can be moved laterally, vertically or diagonally about the grid using keys '1' to '8'. With keys '1' to '4' movement is diagonally in the direction of the black square in the graphics symbol shown on the key; keys '5' to '8' move the plot in the direction of the arrow marked on each. I suggest that a little experimentation would be useful at this stage, again, do not use RUN but GOTO 100. Draw a few lines, preferably following a plan, to make sure that the program is plotting correctly in all directions. BREAK out of the program and examine your handiwork by using GOTO 9988 if

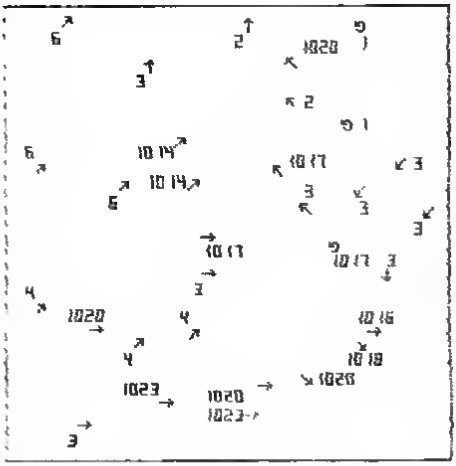

Fig 1a Graphics which vary with the data entered

Program 1

```
    1 REM PROGRAM 1-THIS REM IS
ESSENTIAL
    2 POKE 16514,58
    3 POKE 16515,142
    4 POKE 16516,64
    5 POKE 16517,95
    6 POKE 16518,58
    7 POKE 16519,143
    8 POKE 16520,64
    9 POKE 16521,179
   10 POKE 16522,6
   11 POKE 16523,0
   12 POKE 16524,79
   13 POKE 16525,201
   14 POKE 16526,240
   20 DIM A$(3,256)
   25 DIM C$(445)
   30 DIM D$(32)
   40 DIM V(6)
   45 LET NF8=1
   48 FOR I=1 TO 31
```

```
  50 PRINT AT 0,0;" INPUT STATIO
N NAME"
  60 INPUT L$
  70 CLS
  80 LET C$(NF0)=CNR$ LEN L$
  90 LET C$(NFB+1 TO NF0+LEN L$)
=L$
 100 LET NFB=NF0+LEN L$+1
 110 FOR M=1 TO 6
 120 INPUT N
 130 LET C$(NF0)=CHR$ N
 140 LET NFB=NF0+1
 150 NEXT M
 160 NEXT I
 200 REM PROGRAM TO PRINT C$(445
)
 205 LET P=1
 210 LET L$=C$(P+1 TO P+CODE C$(
P))
 220 PRINT L$
 230 LET P=P+1+CODE C$(P)
 240 FOR N=1 TO 6
 250 LET V(N)=CODE C$(P)
 260 LET P=P+1
 270 NEXT N
 280 PRINT TAB 6;V(1);" ";V(2);T
AB 16;V(3);" ";V(4);TAB 26;V(5);
" ";V(6)
 290 NEXT M
 295 PAUSE 200
 300 REM PROGRAM TO LOAD D$(72)
 305 CLS
 308 PRINT "ENTER NUMBERS FROM T
ABLE 2"
 310 FOR M=1 TO 72
 320 INPUT N
 330 PRINT AT 0,0;"NO. OF VALUES
 ENTERED INTO D$";" = ";M
 340 LET D$(M)=CHR$ N
 350 NEXT M
 400 REM PROGRAM TO PRINT D$
 410 LET P=1
 420 FOR N=1 TO 29 STEP 4
 430 PRINT TAB N;CODE D$(P);
 440 LET P=P+1
 450 NEXT N
 460 PRINT TAB 1;" "
 470 GOTO 420
```

you expanment in this way, be careful to enter as a direct command,

DIM A$(32 256)

to reset all elements of the array to zero

Next, drew a large 256 × 256 grid of squares, or better acquire some graph paper, and divide the top axis by 8 to produce a grid of 32 × 256 divisions, corresponding to the elements of the A$(32,256) array. Label the large divisions 1 to 32 across the grid, from left to right, and the small divisions 1 to 256 from top to bottom. You must now mark on the grid the areas defined by the co-ordinates held in C$(445) and listed for each station as DC,DR in Table 1. For stations from Tiree to Jersey inclusive, mark out a rectangle, 3 large divisions across and 7 small divisions down, so that the area defined by DC,DR is in the top left hand corner. For the remaining stations, 2 large divisions across and 7 small divisions down are required. In the same way mark the positions of the wind direction arrows using co-ordinates NX,NY also given in Table 1, but this time produce a square 1 large division across and 8 small divisions down.

Figure 2 shows how your grid should look for a small area around the Scilly Isles, ignore for the moment the graphics — they will be discussed later. The grid is shown marked for Scilly, Fastnet and Lundy, and partly for Channel Light Vessel and Jersey.

Landmasses

Once all the areas have been plotted on the grid, use your artistic talents to copy, as nearly as you can, the outlines of all the land masses shown in Figure 1, avoiding completely these total exclusion zones. Use a soft pencil and, when the outlines are to your satisfaction, go round them carefully, marking with ink a cross in the squares to be plotted. After that you can rub out the pencil lines.

Now you must adjust your thinking and re-label the grid from 0 to 255 across the top (X axis) and from 255 to 0 from top to bottom, down one side (Y axis). For each land mass choose a convenient starting point and mark it with its X and Y co-ordinates. Use Program 2

Contents of array C$ (445)

	DX,DY	NX,NY	DC,DR
TIREE	74 176	13 74	10 60
SUMBURGH	169 236	21 26	22 20
SELL-ROCK	161 171	20 90	21 65
DOWSING	166 117	24 131	24 139
GOEREE	201 64	27 180	26 172
VARNE	194 61	26 187	25 195
ROYAL SOVEREIGN	177 50	22 206	23 206
CHANNEL LV	113 40	19 210	15 216
SCILLY	55 44	12 220	9 212
VALENTINA	34 65	7 179	5 171
RONALDSWAY	113 122	15 126	15 134
MALIN HEAD	91 160	14 97	11 86
JERSEY	113 29	18 227	15 227
VIKING	204 236	26 9	26 18
FORTIES	204 192	25 64	26 64
CROMARTY	172 205	21 51	22 51
TYNE	172 155	22 110	22 101
DOGGER	204 146	26 101	26 110
FISHER	236 170	29 66	30 85
GERMAN BIGHT	236 135	31 112	30 121
HUMBER	220 117	28 147	26 139
SOLE	36 14	6 233	5 242
LUNDY	100 84	14 161	13 172
FASTNET	68 61	10 186	8 185
IRISH SEA	106 100	16 147	14 158
SHANNON	12 96	3 167	2 159
ROCKALL	12 176	3 89	2 80
MALIN	60 149	9 98	6 107
HEBRIDES	76 217	11 30	10 39
BAILEY	28 241	5 6	4 15
FAIR ISLE	132 239	18 8	17 17

Table 1

Contents of array D$ (72)

0	32	64	255	64	32	0	0
16	56	84	16	16	16	16	16
0	4	2	255	2	4	0	0
16	16	16	16	16	84	56	16
0	30	6	10	16	32	64	0
0	120	96	80	72	4	2	0
0	2	4	72	80	96	120	0
0	64	32	16	10	6	30	0
0	92	98	114	2	34	28	0

Table 2

Program 2

```
   1 REM THIS LINE HOLDS M-CODE
FROM PROG 1.
   2 SAVE "METPLOT"
   3 FAST
  20 IF PEEK 16388+256*PEEK 1638
9=31744 THEN GOTO 28
  23 PRINT "MEMORY NOT RESERVED.
 IT WILL NOW8E RESERVED FOR YOU.
 JUST RELOAD AFTER A SHORT PAUSE
"
  24 PAUSE 1000
  25 POKE 16389,124
  27 NEW
  28 FAST
  29 FOR I=0 TO 112
  30 POKE 31744+I,PEEK (2161+I)
  31 NEXT I
  32 POKE 31800,63
  33 POKE 31857,201
  36 SLOW
 100 PRINT "ENTER START CO-ORDIN
ATES"
 120 INPUT X
 130 INPUT Y
 140 GOSUB 9980
 145 SLOW
 150 PRINT AT 0,0;" CO-ORDINATES
  OF  LAST  POINT  PLOTTED"
 160 PRINT AT 2,10;"X=";X;"  Y="
;Y;"  "
 170 LET I$=INKEY$
 180 IF I$="" THEN GOTO 170
 190 LET Y=Y-(I$="3")-(I$="6")-(
I$="4")+(I$="1")+(I$="7")+(I$="2
")
 200 LET X=X-(I$="1")-(I$="5")-(
I$="4")+(I$="2")+(I$="8")+(I$="3
")
 210 GOTO 140
9970 REM PLOTS(X,Y) INTO A$
9980 FAST
9981 IF X<0 OR X>255 OR Y<0 OR Y
>255 THEN RETURN
9982 LET C=1+INT (X/8)
9983 LET R=256-INT Y
9984 POKE 16526,CODE A$(C,R)
9985 POKE 16527,2**(8*C-INT X-1)

9986 LET A$(C,R)=CHR$ (USR 16514
)
9987 RETURN
9988 FOR I=0 TO 256 STEP 8
9989 FOR J=1 TO 32
9990 FOR K=1 TO 8
9991 POKE 32255+K+8*(J-1),CODE A
$(J,K+I)
9992 NEXT K
9993 NEXT J
9994 FOR H=0 TO 31
9995 POKE 16444+H,H
9996 NEXT H
9997 LET HPRINT=USR 31744
9998 NEXT I
```

Fig 1b The outlines of the map (note the marking of some stations with a +)

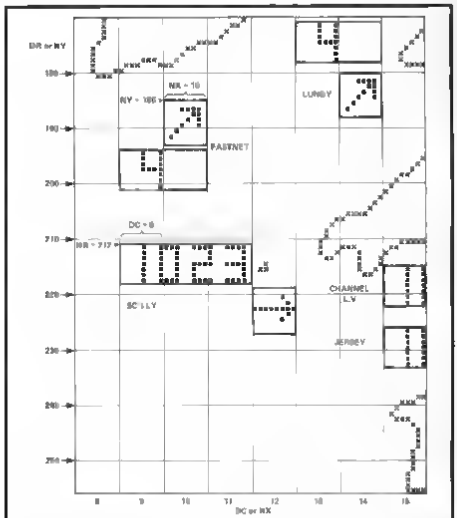

Fig 2a How to mark out the areas of the grid to be avoided when drawing the map

(GOTO 100) to enter these co-ordinates and then work carefully around the outlines from one cross to the next, using keys '1' to '8' as required to enter each point. I suggest that you SAVE (GOTO 2) and print (GOTO 9988) frequently from now on, and certainly after completing each major land mass. For the islands you should, of course, finish where you started with the correct co-ordinates displayed on the screen. If you do not, don't panic! It is possible, with a little artistry, to finish at the right point without the error being obvious in the printed map. Also, the odd dot in the wrong place can often be removed by the careful use of the direct command

LET A$(m,n)=CHR$ 0

where m and n are the relevant co-ordinates. If there are more than a few errors it is probably better to remove everything with NEW, reload with your most recent copy from tape, and start again from where that left off.

When all the outlines have been entered add Program 3 and run it using GOTO 8215 to produce a border around the map. Your print should now look like Figure 1b, with gaps in the French coastline as shown.

The rest is easy! Amend the program so far entered by deleting unwanted lines and adding new lines to produce Program 4. SAVE this definitive version using GOTO 2.

It may be of interest to readers to examine in a little more detail the routines used to plot the graphics. The numbers

Program 3

```
 8212 REM DRAWS BORDERS
 8215 FAST
 8220 LET Y=255
 8230 FOR X=0 TO 255
 8240 GOSUB 9900
 8250 NEXT X
 8260 LET X=255
 8270 FOR Y=0 TO 255
 8280 GOSUB 9900
 8290 NEXT Y
 8300 LET Y=0
 8310 FOR X=0 TO 255
 8320 GOSUB 9900
 8330 NEXT X
 8340 LET X=0
 8350 FOR Y=0 TO 255
 8360 GOSUB 9900
 8370 NEXT Y
 8380 STOP
```

Program 4

```
    1 REM THIS LINE HOLDS M-CODE
FROM PROG 1.
    2 SAVE "METPLOT"
    3 FAST
    6 LET B=9970
    7 LET F=3
    8 LET A=2000
   10 LET FL=0
   20 IF PEEK 16300+256*PEEK 1638
9=31744 THEN GOTO 20
   23 PRINT "MEMORY NOT RESERVED.
 IT WILL NOWBE RESERVED FOR YOU.
 JUST RELOAD AFTER A SHORT PAUSE
"
   24 PAUSE 1000
   25 POKE 16389,124
   27 NEW
   28 FAST
   29 FOR I=0 TO 112
   30 POKE 31744+I,PEEK (2161+I)
   31 NEXT I
   32 POKE 31000,63
   33 POKE 31057,201
   36 SLOW
   37 PRINT "THIS  PROGRAM  TAKES
  BAROMETRICPRESSURES,WIND DIREC
TIONS  AND  FORCES GIVEN IN THE
BBC  WEATHERREPORTS  FOR  COSTA
L  STATIONS AND SEA AREAS  AND P
RINTS  THEM ON A MAP OF THE UK."

   38 PRINT
   39 PRINT "PRESS ANY KEY TO STA
RT"
   40 PRINT
   41 PRINT "THEREAFTER ENTER ""A
""  TO STOP AT ANY TIME"
   42 PRINT
   43 PRINT "NEVER  ENTER "" RUN
""OR "" CLEAR ""OR YOU WILL  LOS
E THE MAP  AND  HAVE TO LOAD AGA
IN"

   44 PAUSE 50000
   45 CLS
   46 LPRINT
   47 PRINT "ENTER PRESSURES AS M
ILLIBARS       (WHOLE NUMBERS) E
.G. 1032",,,
   48 LPRINT "ENTER PRESSURES AS
MILLIBARS       (WHOLE NUMBERS)
E.G. 1032",,,
   49 PRINT "ENTER WIND DIRECTION
 TO NEAREST 1/8 TH. IE. N,NE,E,S
E,S,SW,W,NW OR ""VAR"" FOR A VAR
IABLE WIND  OR FOR CALM",,,,
   50 LPRINT "ENTER WIND DIRECTIO
N TO NEAREST 1/8 TH. IE. N,NE,E,
SE,S,SW,W,NW OR ""VAR"" FOR A VA
RIABLE WIND  OR FOR CALM",,,,
   51 PRINT "ENTER WIND FORCE AS
A DIGIT 1 TO12 OF BEAUFORT SCALE
 - USE 0 FORCALM."
   53 LPRINT "ENTER WIND FORCE AS
 A DIGIT 1 TO12 OF BEAUFORT SCAL
E - USE 0 FORCALM."
   55 PRINT "OR IF YOU PREFER ENT
ER FORCE IN KNOTS OR MPH. (WHOLE
 NUMBERS)",,,
   57 LPRINT "OR IF YOU PREFER EN
TER FORCE IN KNOTS OR MPH. (WHOL
E NUMBERS)",,,
   60 PRINT "NOW ENTER MONTH, EG.
 - SEPT"," "
   62 INPUT M$
   64 IF M$="A" THEN STOP
```

```
  66 PRINT "THEN ENTER DAY (NUMB
ER)",,,
  68 INPUT D
  70 PRINT "AND TIME, EG - 1800"

  72 INPUT T
  74 PRINT
  76 PRINT "AND THE YEAR"
  78 INPUT Y$
  80 IF Y$="A" THEN STOP
  81 CLS
  82 PRINT "DD YO WISH TO HAVE A
 LIST OF THEDATA THAT YOU ARE EN
TERING?",,,"( ANSWER  Y OR N )"
  84 INPUT N$
  85 CLS
  86 IF N$="Y" THEN LET FL=1
  88 IF N$="A" THEN STOP
  89 IF FL=0 THEN GOTO 95
  92 LPRINT "STATION/",,"SEA ARE
A"
  94 LPRINT
  95 LET SUM=0
  97 LET P=1
 100 LET N=0
 110 LET SUM=SUM+1
1310 LET L$=C$(P+1 TO P+CODE C$(
P))
1320 LET P=P+1+CODE C$(P)
1330 FOR M=1 TO 6
1340 LET V(M)=CODE C$(P)
1350 LET P=P+1
1360 NEXT M
1370 LET DX=V(1)
1380 LET DY=V(2)
1390 LET NX=V(3)
1400 LET NY=V(4)
1410 LET DC=V(5)
1420 LET DR=V(6)
2000 CLS
2001 IF SUM>13 THEN GOTO 2060

2002 PRINT AT 0,4;"ENTER PRESSUR
E FOR :-"
2004 PRINT AT 2,4;L$
2005 INPUT N$
2006 IF N$="A" THEN STOP
2007 GOSUB F*A
2008 FOR I=0 TO (LEN N$-1)*6 STE
P 6
2010 LET N=N+1
2020 LET DX=DX+I
2030 LET V$=N$(N)
2040 GOSUB 3000
2045 LET DX=DX-I
2050 NEXT I
2055 IF SUM>13 THEN RETURN
2060 PRINT AT 0,4;"ENTER WIND DI
RECTION FOR :-"
2064 PRINT AT 2,4;L$
2065 INPUT W$
2068 IF W$="A" THEN STOP
2070 CLS
2080 GOSUB 7000
2082 IF FL=0 THEN GOTO 2090
2083 LPRINT
2085 LPRINT L$;TAB 19;N$;TAB 29;
W$
2090 IF SUM=31 THEN GOTO 2600
2100 IF SUM=13 THEN GOTO 2700
2500 GOTO 100
2600 CLS
2602 PRINT "ALL DATA  SHOULD NOW
  HAVE BEEN ENTERED.",,,,"TO PRI
NT THE MAP ENTER ""P"",","TO RES
TART THE PROGRAM ENTER ""R""OR E
NTER ""A"" TO STOP"
2605 INPUT N$
2607 CLS
2610 IF N$="P" THEN GOTO 9950
2620 IF N$="R" THEN GOTO 3
2630 IF N$="A" THEN STOP
2640 GOTO 2602
2700 PRINT "DATA  FOR COASTAL  S
TATIONS HAVENOW  HAVE BEEN ENTER
ED.",,,"IF YOU WISH TO PRINT THE
  MAP    ENTER ""P"",",,"TO CONTI
NUE ENTERING SEA AREA   DATA ENT
ER ""C"" OR ENTER ""A"" TO  STOP
"
2705 INPUT N$
2710 LPRINT
2720 IF N$="P" THEN GOTO 9950
2730 IF N$="C" THEN GOTO 100
2740 IF N$="A" THEN STOP
2750 GOTO 2705
3000 IF V$<>"5" AND V$<>"6" THEN
 GOSUB 5100
3010 IF V$<>"2" THEN GOSUB 5200
3020 IF V$<>"1" AND V$<>"4" THEN
 GOSUB 5300
3030 IF V$="2" OR V$="6" OR V$="
8" OR V$="0" THEN GOSUB 5400
3040 IF V$<>"1" AND V$<>"4" AND
V$<>"7" THEN GOSUB 5500
3050 IF V$<>"1" AND V$<>"7" AND
V$<>"8" THEN GOSUB 5600
3060 IF V$<>"1" AND V$<>"2" AND
V$<>"3" AND V$<>"7" THEN GOSUB 5
700
3070 RETURN
5100 LET X=DX+F
5110 FOR Y=DY-F TO DY
5120 GOSUB 8
5130 NEXT Y
5140 RETURN
5200 LET X=DX+F
5210 FOR Y=DY-F-F TO DY-F
```

```
5220 GOSUB 8
5230 NEXT Y
5240 RETURN
5300 LET Y=DY
5310 FOR X=DX TO DX+F
5320 GOSUB 8
5330 NEXT X
5340 RETURN
5400 LET X=DX
5410 FOR Y=DY-F-F TO DY-F
5420 GOSUB 8
5430 NEXT Y
5440 RETURN
5500 LET Y=DY-F-F
5510 FOR X=DX TO DX+F
5520 GOSUB 8
5530 NEXT X
5540 RETURN
5600 FOR X=DX+1 TO DX+2
5610 LET Y=DY+F
5620 GOSUB 8
5630 NEXT X
5640 RETURN
5700 LET X=DX
5710 FOR Y=DY-F TO DY
5720 GOSUB 8
5730 NEXT Y
5740 RETURN
6000 REM UNPLOT
6010 FOR C=DC TO DC+2-(SUM>13)
6020 FOR R=DR TO DR+F+F
6030 LET A$(C,R)=CHR$ 0
6040 NEXT R
6045 NEXT C
6050 RETURN
7000 IF W$="A" THEN STOP
7005 LET W=0
7010 IF W$="E" THEN LET W=1
7020 IF W$="S" THEN LET W=9
7030 IF W$="W" THEN LET W=17
7035 IF W$="N" THEN LET W=25
7040 IF W$="NW" THEN LET W=57
7050 IF W$="NE" THEN LET W=49
7060 IF W$="SW" THEN LET W=33
7070 IF W$="SE" THEN LET W=41
7080 IF W$="VAR" THEN LET W=65
7090 IF W=0 THEN PRINT "NO SUCH
WIND DIRECTION.          *** TRY
AGAIN ***"
7093 IF W=0 THEN INPUT W$
7095 IF W=0 THEN GOTO 7000
7100 FOR I=1 TO 8
7110 LET A$(NX,NY+I-1)=D$(W+I-1)

7120 NEXT I
7130 IF SUM<=13 THEN RETURN
7240 PRINT AT 0,4;"ENTER WIND FO
RCE FOR :-"
7241 PRINT
7243 PRINT AT 2,4;L$
7245 GOSUB 6000
7250 INPUT N$
7255 LET N=0
7260 GOSUB 2000
7270 RETURN
9950 LPRINT
9951 LPRINT D;" ";M$;" ";Y$;" AT
 ";T;" HOURS,GMT:-"," "
9955 LPRINT
9956 CLS
9957 PRINT "USE GOTO 36 TO RUN A
GAIN"
9958 FAST
9960 GOTO 9900
9970 REM PLOTS(X,Y) INTO A$
9900 FAST
9901 IF X<0 OR X>255 OR Y<0 OR Y
>255 THEN RETURN
9902 LET C=1+INT (X/8)
9903 LET R=256-INT Y
9904 POKE 16526,CODE A$(C,R)
9905 POKE 16527,2**(8*C-INT X-1)

9906 LET A$(C,R)=CHR$ (USR 16514
)
9907 RETURN
9908 FOR I=0 TO 256 STEP 8
9909 FOR J=1 TO 32
9910 FOR K=1 TO 8
9911 POKE 32255+K+8*(J-1),CODE A
$(J,K+1)
9912 NEXT K
9913 NEXT J
9914 FOR H=0 TO 31
9915 POKE 16444+H,H
9916 NEXT H
9917 LET HPRINT=USR 31744
9918 NEXT I
```

are entered with the plotting routine at line 9970, taking X and Y co-ordinates from array C$(445). These are listed in Table 1 as DX,DY. Each digit is printed as a particular combination of seven segments in much the same way that digits are displayed on calculators and watches (see Figure 2). They are as small as legibility would allow. Because pressures need 3 or 4 digits, and wind strength 1 or 2 digits, a routine was necessary to remove previous entries. By making sure that all digits were confined to elements of the 32×256 grid, the simplest way of 'unplotting' was to assign CHR$ 0 to the relevant elements. The subroutine at line 6000 does this using co-ordinates DC,DR retrieved from C$(445) (Table 1).

The wind direction arrows are added in a way similar to the unplot sub-routine except that, instead of entering CHR$ 0 selected codes are retrieved from D$(72) which when A$(32 256) is printed will give the required symbol. You will see how this works from Figure 3. The arrow for Scilly in Figure 2 has been enlarged to show that the pattern of dots corresponds to the binary notation of the bytes contained in D$(17 24) when assigned to A$(12,220 227) respectively. There is no need for an 'unplot' routine because, when used again, the program will have the effect of over-writing the previous symbol.

When you are ready to use Program 4, Table 3 provides a list of representative data for all the Coastal Stations and Sea

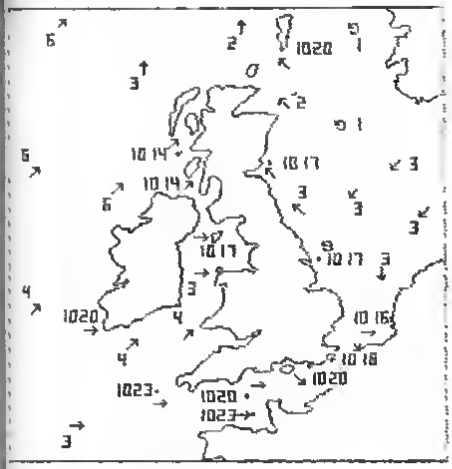

Fig 1c The completed weather chart

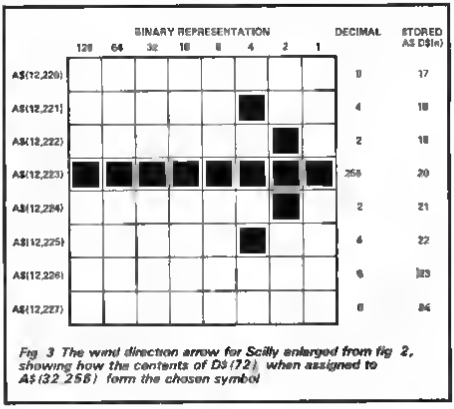

Fig 3 The wind direction arrow for Scilly enlarged from fig 2, showing how the contents of D$(72), when assigned to A$(32,258), form the chosen symbol

```
19 MAR 1983 AT 1200 HOURS,GMT.-
```

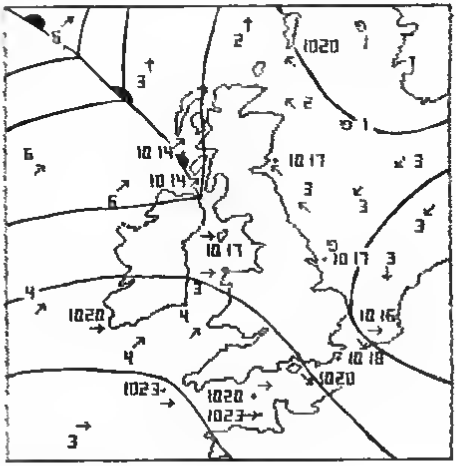

Fig 1d Weather chart with isobars added by hand

Station/Sea Area

TIREE	1014	SW
SUMBURGH	1020	SE
BELL-ROCK	1017	SE
DOWSING	1017	VAR
GOEREE	1016	W
WARNE	1013	NW
ROYAL SOVEREIGN	1020	NW
CHANNEL LV	1020	W
SCILLY	1023	W
VALENTIA	1020	W
RONALDSWAY	1017	W
MALIN HEAD	1014	SW
JERSEY	1023	W
VIKING	1	VAR
FORTIES	1	VAR
CROMARTY	2	SE
TYNE	3	SE
DOGGER	3	NE
FISHER	3	NE
GERMAN BIGHT	3	NE
HUMBER	3	N
SOLE	3	W
LUNDY	4	SW
FASTNET	4	SW
IRISH SEA	3	W
SHANNON	4	SW
ROCKALL	6	SW
MALIN	6	SW
HEBRIDES	3	S
BAILEY	6	SW
FAIR ISLE	2	S

Table 3

Areas required. Later on, try recording a Shipping Forecast and extract from it some actual data. You will notice that I have had to omit a few Sea Areas altogether — there just was not enough room in the English Channel!

You should end up with a weather chart like the one in Figure 1c and, if you feel up to it after all this effort, you could try adding the isobars as in Figure 1d. You may need a wet weekend or two to do all this, but what a challenge!

GOOD LUCK!

Program Description

Lines	Description
1	Machine-code from ZX printer manual
6-8	Assigns numerical values to 'letter' variables to save space in memory
10	Variable FL is used as a flag, set in line 86
20 36	Modification of program given in ZX printer manual
37 94	PRINTS instructions, requests INPUTS
95	Variable SUM is used to count the number of Coastal Stations/Sea Areas processed
100-2500	Main processing loop
1310	L$ holds the name of Coastal Station/Sea Area retrieved from C$(445)

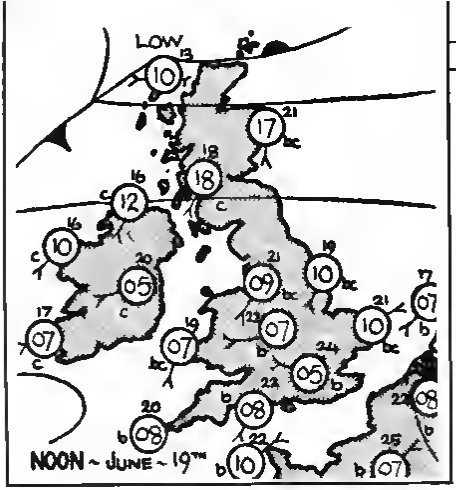

1320 1420	Variables V(1-6) hold plot co-ordinates retrieved from C$(445)
2001	Checks if INPUT of Coastal Station data is complete
2002-2006	INPUT of barometric pressure values
2007	GOSUB 6000 the 'unplot' sub routine which uses co ordinates held in variables DC and DR

ZX81

2008 2500	Each digit of the barometric pressure values is assigned in turn to V$ and transferred to A$(32 256)
2008-2055	Sub routine called at line 7260 which transfers wind force digit to A$(32 256)
2060 2080	INPUT and processing of wind direction information, incorporates GOSUB 7000
2090	Leave loop if all Coastal Station data has been entered
2100	Leave loop if all Sea Area data has been entered
3000-3070	Sub routine of logic gates which examine the digit held in V$ and fork to other sub-routines at lines 5100 5740
5100-5740	A series of sub routines which set up the X and Y co ordinates needed by the sub routine at 9970 to plot each segment of the required digit
6000 6050	The 'unplot' sub routine
7000 7270	Sub routine of logical gates to set variable W to a value which is used to select from D$(72) the code which produces the chosen wind-direction arrow when transferred to A$(32 256) by lines 7100-7120 and printed
7130	RETURN if Coastal Station data is being entered
7240-7270	INPUT of wind force data and its transfer to A$(32,256) using sub routine 2008 also incorporates the 'unplot' sub routine at line 6000
9951	Caption sent to ZX printer
9970 9998	Sub routine from ZX printer manual that enters each point to be plotted using co-ordinates given by variables X and Y

The ZX81 soft selection

Nick Pearce looks at some new releases for the ZX81

Merchant of Venus Crystal Computing

This adventure with graphics' program was first on sale in 1982 and has recently been re-released 'due to popular demand' as Crystal put it.

Merchant of Venus is certainly an absorbing game. It combines real time graphics simulation in which you control a leviathan space freighter (whassar?), with the challenge of building a strong economy on Venus.

The program auto-runs upon LOADing and your first task is to select the class of freighter you desire. They vary in price and of course quality. A cheap ship will possess only limited cargo carrying capacity, and could cost you a small fortune in repairs!

Once a freighter has been selected, trading can commence. As you gain experience as a merchant, you discover how prices for the various commodities — Plasteel, Technetium, Mylar etc. — vary between differing regions of the planet. It is a matter of judgement to buy and sell at the most advantageous prices.

Take off is not always uneventful. Insufficient thrust will result in the freighter falling back to the planet. The screen displays the readout from the on-board computer, relaying information such as the vertical and horizontal velocities, and the state of the reactor core and fuel.

Once airborne and cruising you are warned by the computer of any approaching landing base. As you descend the display changes and shows information from the ground tracking radar.

Piloting the freighter to a safe landing is not an easy task. If you are successful, a landing report details your touchdown velocity and the amount of damage sustained on landing. Trading can then continue.

Merchant of Venus is a complex and absorbing game, and fun to play. However, it requires most of the 16K RAM and as a consequence, the load time of the game is quite considerable.

Crystal Computing are at 2, Ashton Way, East Herrington, Sunderland SR3 3RX.

Galaxians and Gloops Quicksilva

Quicksilva have produced an excellent version of Galaxians for the ZX81. The action is fast and responsive, and it is a pleasure to play.

Two types of galaxians move, in formation across the top of the screen and swoop down attacking your base. You have three lives available, while the speed, firing rate and the number of swooping Galaxians are adjustable by the player.

Points are scored in the usual fashion, by blasting the Galaxians as they fly. However, more points can be scored if the Galaxians are hit as they swoop down from the top of the screen.

Scoring is displayed on the screen, and at the end of each game, your score is entered into a league table which can cater for up to 16 games/players.

The first batch of swooping Galaxians are particularly good at searching out and destroying your base, and some deft manouvreing is required to avoid their attack. Thereafter the battle is fierce but a high score can be achieved by the experienced player. If it becomes too easy the level of difficulty can be soon increased.

Gloops

This cassette also contains Gloops a version of the arcade type maze game. You move your 'Gobbler' eating up food pills which are worth about 10 points each. The 'Ghosts' will eat you if they catch you. If you can reach one of the power pills in the maze, you take your revenge for a short while and add 100 points to your score if you can catch a ghost. There are 10 different mazes to choose from, and the speed is selectable in 10 discrete steps. Action is responsive, making Gloops a first-class version of this popular game.

Now for the bad points! Although the instructions state that both Galaxians and Gloop auto-run upon loading, the review copy I had did not. To execute the program, I had to enter in immediate-mode, GOTO 1. This being said, both are impressive machine code games and overall the cassette is a very reasonable buy.

Galaxians costs £4.95, and Quicksilva Ltd is at Palmerston Park House, 13 Palmerston Road, Southampton SO1 1LL.

Galactic Trooper Romik Software

Galactic Trooper is another fast moving arcade type game from Romik. The landing craft of the galactic attack force are in formation in columns at the top of the screen. You move your craft along the bottom of the screen, trying to destroy as much of the force as possible before the inevitable happens ie you are obliterated. A mother ship services the galactic force, if you destroy it you gain 500 points.

There are three skill-levels available, but whatever skill level you select, the difficulty of the game continues to increase as the game goes along.

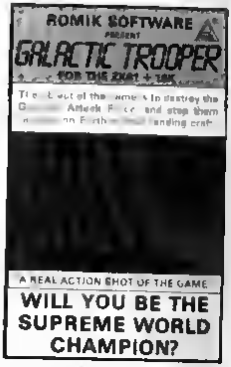

A REAL ACTION SHOT OF THE GAME

WILL YOU BE THE SUPREME WORLD CHAMPION?

The action is good, but it is difficult to build up a high score. A fairly good game from Romik Software.

Romik Software Ltd is at 272 Argyll Avenue, Slough, Berks.

Frogger II The Software Farm

In this game, you have to help your frog to cross a very busy three lane road, a path, a river, and then into one of your 'frog-holes'. There are the usual hazards to make things difficult. Vehicles on the road must, of course, be avoided and so must the ghosts which patrol the path and the submerged turtles and ships in the river.

To cross the river, the frog must jump onto logs, floating or semi-submerged turtles, and the backs of crocodiles — but beware the heads and noses of these beasts!

There are three frogs per game and a time limit. There is only one speed, which is perhaps a little slow. You do need to keep your wits about you, however, to build up a high-score. The turtles have a nasty habit of quickly submerging just after your frog has landed on them.

A good scoring system is included, featuring a hall of fame. Instructions are given on screen at the start.

A fair game.

The Software Farm is at Craigo Farm, Botany Bay, Tintern, Gwent.

The Computerised Diet
Softchoice Ltd.

If you are a ZX81 owner, and would like to loose weight, The Computensed Diet might be of interest to you It is a 'personalised' program, so after asking for your name, it goes on to ask your current weight and height and your sex Incidently it was at this stage that I made my first mistake, of the classic not reading the instructions variety, and entered my weight in stones rather than pounds. Consequently, when I proceeded to select my 'ideal' weight — 150 lbs — I was told that I needed a weight change of 140 lbs which would require a calorie intake of 2100 calories! This program needs error trapping!!

Upon entering my correct weight in pounds, I was told that I needed a weight change of 10 lbs., and a calorie intake of 2100 calories daily The next step is to record the information onto a table in the booklet that accompanies the cassette

The second part of the PSA (Present Status Assessment), asks 12 questions about current eating habits ie 'Do you eat quickly', 'Do you eat when bored etc' Your bad habits are then listed on the screen and you are asked to enter them in the booklet

Prior to using the program, the user must have kept a record of all food consumed over three to seven days This is entered to build up your DEP (Daily Eating Pattern) For each meal you enter the calories consumed, and your mood at the time anxious bored, depressed etc Tables in the booklet give calorie values of foods etc Your daily eating habit pattern is summarised to give your average daily calorie intake the calorie change required to give your desired weight, and predominant mood at snacks Again, the data should be entered into the booklet

The first side of the cassette ends with printouts in graphic and tabular format of your present, and ideal, calorie intake for each meal of the day You can save your eating pattern to enable your progress to be monitored — a blank cassette is provided for this purpose

The reverse side of the cassette contains a menu building program Briefly, the computer assists the user in developing the food groups (there are eight) and the servings of each group for each meal This results in a balanced diet containing the requisite number of calories

The two programs work quite well Screen displays and data-entry are generally clear and are well thought-out The printouts are good and the booklet is helpful

Doctors generally agree that dieting should be coupled with exercise if a lasting weight loss is to be achieved Also that correct food balance is if anything, more important than pure calorie counting Perhaps a development of this program to include all these factors would be worthwhile sim As it stands I am sceptical that it would be of real benefit to the overweight

Strangely, whilst the computer hobbyists spend many hours hunched over their machines and have pale complexions as a result, few in my experience, are overweight Perhaps their preoccupation with computing leaves insufficient time for other indulgences

Softchoice Ltd, are at 52 Platts Lane London NW3 7NT

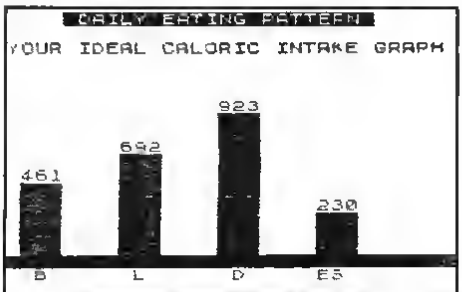

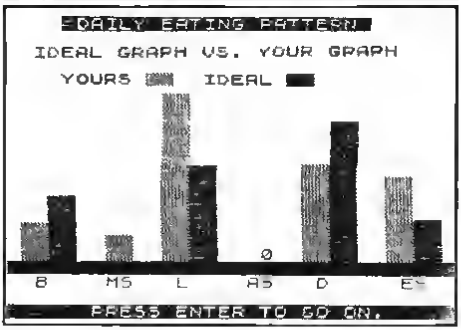

DAILY EATING PATTERN
SUMMARY

MEAL	PRESENT	IDEAL	CHANGE
BREAKFAST	250	461	211
AM. SNACK	165	0	-165
LUNCH	1335	692	-643
PM. SNACK	0	0	0
DINNER	606	923	317
EVENING	500	230	-270

P=PRINT OUT ENTER=CONTINUE

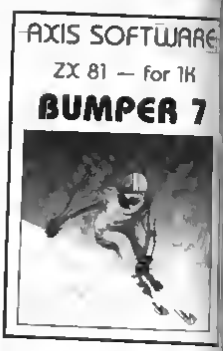

Bumper 7
Axis Software

Bumper 7 contains no less than — you've guessed it — seven games for the 1K ZX81 Considering the limitations of the 1K machine, and the price of a 16K RAM pack these days there can be few ZX81 owners with just the 1K machine For those that do possess unexpanded ZX81's, this cassette contains a selection of games which illustrate certain features such as scroll and cursor control which may help with your own programs

Repeat 20 is a memory test in which progressively larger numbers have to be remembered The Slalom is a downhill ski run in which the player has to guide the skier through 25 gates

Also included within Bumper 7 are versions of Paper, Stone Scissors (*This used to be called Ick, Ack, Ock Don't ask me why — Ed*) Snowflake, a game in which the aim is to catch falling snowflake in a bucket Patterns, an endlessly changing pattern-generation program Banco, based on the card game *Chemin-de fer*, and finally Sketch, which is a program to enable pictures to be drawn on the screen

Bumper 7 is a good introductory cassette for the new-ish 1K ZX81 owner

Axis (U.K.) Ltd is at 71 Brookfield Avenue Loughborough Leics LE11 3LN

Correction!

In last month's issue I reviewed two games and gave the USA companies name and address I would like to point out that the programs Signalman and Speedsnake are sold in England by Softchoice Ltd, 52 Platts Lane London NW3 7NT

List Option

Stephen Bugg's makes the ZX81 LIST like a Spectrum.

This program which will scroll through the lines of a program from any starting line you desire to the end or to any specified line.

As it stands it is not particularly helpful, but all it needs is renumbering to a suitable high line number (say 9000), and to be loaded into your computer and left there before each programming session.

Comments

1000-1003	Input bounds of printouts of lines
1005-1009	Find bounds of memory allocated to program
1009	If first line is not wanted then goto find first line sub-routine
1010	Check for end of program
1020	Read line number (first two bytes of line)
1022	Check if after last desired line number
1025-1030	Print line number in front of LIST command, bbbXb
1035	Increment address pointer by 2, number of bytes used for the line number
1040	Reads number of characters in line
1045	Increment address pointer by 2 - number of bytes used for line length
1050-1065	Loop for each item in line except newline at end
1053	Check if pause is wanted. Pause routine at 1125
1055	Load A with value of address to which is being pointed. X is first text address in line, Z is position in line
1060-1065	Character 126 (NUMBER) follows a number in memory, and this is in turn followed by another 4 characters. These 5 characters do not want to be printed, and these 2 lines avoid this being done
1070	Print character held in A
1080	If Print line is 3 then move to SCROLL routine
1095	Increment address pointer by length of line
1010-1100	Loop for each line in program
1105-1120	SCROLL ROUTINE
1105	Load B with Print column
1115	Set Print position to correct position, one line above previous position. After scroll the next character will be printed immediately after previous character
1125-1130	PAUSE ROUTINE
1125	Return to main routine if pause is to end, if "0" is pressed
1140	FIND FIRST DESIRED LINE
1140	Read line number
1145	If reached starting position then goto main routine
1166	Read line length
1160-1170	Increment address pointer by line length

Variables

A	Value of address at pointer
B	Print column
DFILE	End of program address
ED	Last line desired
ST	First line desired
X	Address pointer, starts at 16509, line 1005 and is incremented as byte is read. Lines 1035, 1045, 1095, 1160, 1170
Y	Line number (1020 and 1140) and Line length (1040 and 1165)
Y$	String to print out line length
Z	Counter for line length

Operating Instructions

RUN 1000 and GOTO 1000 will call the routine.
START LIST asks for the first line that is to be printed.
END LIST asks for the last line that is wished to be printed.
The program will now list the lines between these two line numbers inclusive. It will not stop until the end unless the Pause Routine is called, this is done by pressing the "S" key, the Pause is disabled by the pressing of the "0" key. By pressing the break key the user can stop the routine and the listing will remain on the screen. The line numbers used can be changed for something that is more acceptable such as 9800, 9999, but the GOTO's will also need to be altered. Also the variable names may be changed if the same variable is used by the programs and can not be changed. If the variables need to be retained then GOTO 1000 must be used as RUN 1000 will clear these variables.

```
1000 PRINT "START LIST "
1001 INPUT ST
1002 PRINT "END LIST "
1003 INPUT ED
1005 LET X=16509
1008 LET DFILE=PEEK 16396+256*PE
EK 16397
1009 IF ST>1 THEN GOTO 1140
1010 IF X>=DFILE THEN STOP
1015 SCROLL
1020 LET Y=PEEK X*256+PEEK (X+1)
1022 IF Y>ED THEN STOP
1025 LET Y$=STR$ Y
1030 PRINT AT 20,(4-LEN Y$);Y$;T
AB (5);
1035 LET X=X+2
1040 LET Y=PEEK X+PEEK (X+1)*256
1045 LET X=X+2
1050 FOR Z=0 TO Y-2
1053 IF INKEY$="S" THEN GOTO 112
5
1055 LET A=PEEK (Z+X)
1060 IF A=126 THEN LET Z=Z+5
1065 IF A=126 THEN GOTO 1055
1070 PRINT CHR$ (A);
1083 IF PEEK 16442=3 THEN GOSUB
1105
1085 NEXT Z
1090 PRINT
1095 LET X=X+Y
1100 GOTO 1010
1105 LET B=PEEK 16441
1110 SCROLL
1115 PRINT AT 20,33-B;
1120 RETURN
1125 IF INKEY$="0" THEN GOTO 105
5
1130 GOTO 1125
1140 LET Y=PEEK X*256+PEEK (X+1)
1145 IF Y>=ST THEN GOTO 1010
1160 LET X=X+2
1165 LET Y=PEEK X+PEEK (X+1)*256
1170 LET X=X+Y+2
1175 GOTO 1140
```

Compac

Liverpudlians JD Rogers and C Hogg have produced yet another winner with this definitive Pacman type game.

J Dave Rogers — Colin Hogg

Unlike many maze/ghost-chase type programs this one is challenging and will be appreciated by the connoisseur of such games. The three independent ghosts have more than the average amount of intelligence and in fact even with the *nine* extra lives allowed, experienced arcade players will need many plays before being able to clear all of the screens.

Most of the program functions, including man movement, are in BASIC just the ghost movements and screen checks are in machine code, yet the speed is equal to the arcade versions. There are *twelve* carefully designed full-screen-size mazes (including 'tunnels'), all in a surprisingly compact listing.

In attaining this compactness only two things have been left out. One is power pills, the other is continuous (dot counting) scoring. We think the quality of play and other features more than make up for these. The addictive quality of these types of games seems to lie in 'cleaning screens' rather than scoring points.

Using the program, playing the game

There are two sets of mazes, either of which can be chosen upon running. The second set are considerably harder to clear and are really intended for when you've become successful on the first set and are looking for a further challenge!

A fixed score is given for cleaning each screen, and since they are graded in difficulty successive screens are worth more points (see table 1). Also, the ghosts are programmed to be a bit less vicious on screens one and two, but reach their 'full-strength' from screen three onwards.

When killed you are rejuvenated, using up one life and carry on from the point where you were hit. Clearing a screen also gives you an extra life, and there is an added bonus of four extra lives if you can get past screen three.

If you happen to break the program, don't press RUN or you will have to wait for maze decoding (see later). Always enter GOTO 400 to re-execute the program.

To save the program always use 'GOTO 500' as this includes a 'clear' to erase the large arrays that are used and so drastically reduce loading time.

The ghosts will not follow you through tunnels. Maze 'C', in addition to having normal tunnels, has two 'bolt holes' which can be used as resting places where the ghosts can't get at you.

Screen	Points	Appearance	Tunnels	Title
A (G)	500	Grey	2 (4 + H)	Easy Street
B (H)	2,000	Stripes	3 (4 + H)	Skid Row
C (I)	4,500	Grey	4 (4 + H)	Mr P. Acne
D (J)	8,000	Quilted	2 + H (4 + H)	Roundabouts
E (K)	12,500	Grey	None (4 + H)	Claustrophobia
F (L)	18,000	Psychedelic	2 (4 + H)	Open-Field

Table 1 Summary of screens (brackets indicate 'Second set' screens) H indicates Horizontal tunnel

Storing mazes in a five bit code

To store six, full screen-size mazes in the usual way (as strings of characters) would require 132 such lines to be typed in — making a tedious and error prone total of over four thousand black and white blocks to be entered. In this program the mazes are held in the form of a five-bit code (see figure 2), where each maze line (32 characters) is 'crunched' into just *three* coded elements, giving a compression ratio of almost eleven-to-one! An 8 bit code was first considered but was awkward to type in and ambiguous, involving back-spacing to enter the characters needed to represent certain numbers, and 'chr$ N' to represent those not having a Sinclair code. Hex adecimal code was another possibility, but this only offered an 8 to-1 compression ratio.

The five bit code uses numerals 0 to 9 extended through characters A to V to represent binary numbers up to 31. Full stops can be used instead of zeros and provide occasional visual landmarks for even easier typing in.

On first running the program it takes two minutes to decode the information to form the actual mazes. This, however works out to be *less* than the extra time it would have taken to load the program had the mazes all been held in strings. So overall time is saved and since the program itself is made much shorter you also have the advantage of more reliable loading. Even more economical is that the extra mazes (second set) can be obtained more or less for free by decoding the information for the main mazes in a different order. Only three program lines are needed for this (772 774).

Concerning Bug movements

The programming of (what looks like) intelligence into the enemy 'pac's is not as simple as it may seem, and many pages could be written on this interesting but sometimes frustrating subject. A particular

algorithm may work perfectly in a given shape of maze only to fail in a slightly different layout. It is also advisable never to rely on oneself to be 'test pilot' during development, since a system that consistently outwits one person may be useless against somebody else who naturally tends to take different route decisions during play.

The common solutions such as move towards player line then player column, produce 'stupid' enemy pac's that are forever getting stuck or will just jiggle up and down apparently unwilling to get past the slightest bend in the maze to catch you. Another typical behaviour is for all the pac's to follow the same path in which case they are liable to stay in a train behind the player, again offering no real challenge.

An interesting test for any pac move algorithm is a 'U' shape in the maze, or more accurately any construction that is *topologically* equivalent to a 'U'. Take a look at some commercial/arcade mazes — U shapes are avoided, except at the edges. Here it doesn't matter because the situation 'player under the U-with pac inside' can never arise, and it is this condition that can cause trouble.

The system used in this program is shown on the flowchart. It contains subroutines for moving in all four directions, but these are only called in response to a series of checks. The obvious moves directly towards player line and player column are tried first, and if none of these are valid, then scans are made for paths further afield. For compactness, the same central routine is used for all three pac's in turn, but information relevant to each pac is held in separate stores and flags (bytes are set aside for this at the end of the machine code ram line). The information on pack 'A' is first shifted into the pac move routine, the routine is executed, the pack is moved, then the new position and status of the pac are replaced into its store for use in its next move. This is then repeated for pac's 'B' and 'C'. Despite all three pac's using the same algorithm, they hardly ever follow the same paths as each other. This is because each pac is programmed to regard any other pac's as walls of the maze and so it will split off. In this way two pac's will often do a 'pincer' movement to trap you!

Use of RAND seed

The pac move routine needs to

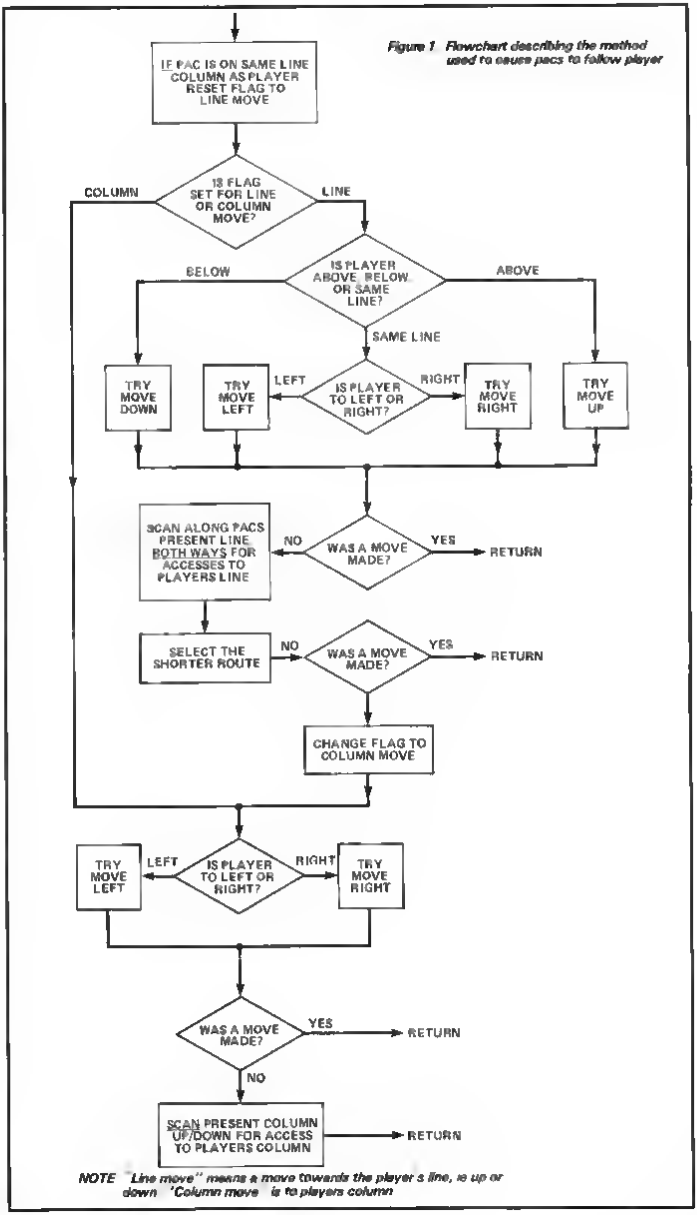

Figure 1. Flowchart describing the method used to cause pacs to follow player

NOTE "Line move" means a move towards the player's line, ie up or down. "Column move" is to player's column.

know the players immediate line and column positions So as not to slow down the program the 'RAND' function is used as an efficient means of transferring this information from the BASIC to the Machine Code Changes in 'A' (across) only affect the low byte of the RAND seed, so this represents player column, while changes in 'D' (down) are multiplied by 256 and will therefore affect only the high byte, so this represents player line The machine code can now go directly to the two fixed addresses of the RAND seed to obtain this information instead of messing about finding addresses in the Variables area, which is not fixed

Typing In — IMPORTANT

- Type in as line 1, a Rem statement containing *exactly* 101 of any character
- Enter as a direct command 'PRINT PEEK 16511' If the answer is *not* 103 then line 1's length is wrong and must be corrected
- Duplicate line one, four times by editing its line number to 2, then 3, 4 and five
- Type in the hex loader, then run 9000 and enter the hex data one line at a time *including* the check figures (but not the spaces) The loader will intercept errors of any kind and prompt you until you get it right! The commonest mistakes are confusing B's, 8's, 6's and 5's, therefore we have redesigned parts of the ZX81 character set to look less ambiguous on the ZX printer
- Type in main program, erase the hex loader, **save** a few copies on tape, then run
- Check the mazes, if you spot any 'dead ends' in mazes A to E then you have made a mistake in entering the code for that maze so check in lines 710 to 760

Unlike normal Rem statements, line 9999 is **not** optional since it forms one of the 'trigger lines' used for tunnel movements (see later) Also please consider the following points

- Line 650 must contain **twelve inverse spaces**
- Lines 700 800 are best entered in 'fast' mode, and note that these contain letter O's, not zeros and I's as well as 1's
- Line 250 — inverse 'MAZE' then an inverse minus Do not use an inverse space
- Line 9070 (part of Hex loader) — inverse 'ERROR'

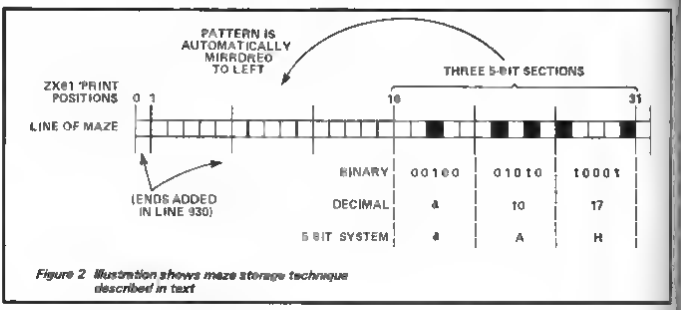

Figure 2 Illustration shows maze storage technique described in text

Do not attempt to alter line numbers between zero and 400 since the machine code causes line 90 to 'GOTO' certain preset lines Check lines 265 and 395, and lines 870 and 890

Customising

If you find some of the mazes a strain on the eyes then you can have them all in 'restful grey' by changing line 840 to read 'LET A = 136'

Some people prefer the arcade type of free-running control response i e if no keys (or more than one key) are pressed then the player continues to move in the same direction This can be obtained by adding 5 IF CODE INKEY$ + ABS (D + A) 4 THEN GOTO 20

You can alter the actual control keys to those you feel most comfortable with by changing lines seven and ten

To slow down the game (and add an extra effect) add '+ RND' to line 50 Custom points 2 and 8 also slow down the game

For desperately bad players the final figure in line 100 can be changed to 5 This gives the advantage when turning corners to you rather than the ghosts, and even lets you take a breather to compose your wits by purposely running against a wall for a while

A proper pause facility (for when the phone goes or you suffer a sneezing fit at a crucial stage of play) can be obtained by adding '15 IF INKEY$ = "P" THEN PAUSE 4E4'

If you would prefer the player to restart at the top of the screen after being killed (as in arcade type) then relocate line 270 to 371 and line 280 to 372, erasing the originals of course

To encode your patterns of mazes into the 5 bit format you should start at column sixteen of each line and work right, converting each group of five characters into a five bit binary number ie dot = 0 Maze wall = 1 Mazes should be left-right-symmetrical

The Basic

7 90	Players move routine
30	If character at Intended Position is anything other than a dot or a space then GOTO further checks at line 100 otherwise
40 60	Blank out previous position, POKE player onto screen at new position update S
70 80	Update Line/Column variable (LC) then use this as seed for RAND (see text)
90	Calls machine code to move the three 'ghosts' and do screen checks, then ' goes to one of the following lines Normally — line 5 If player has been hit by ghost — line 300 If screen has been cleared of dots — line 200
110	If player hits one of the 'trigger lines' (consisting of CHR$ 21) above and below the maze area then a 'tunnel' move is performed by setting D to either 21 or minus 21 (depending whether player is at top or bottom of screen). Upon re-entering the main loop, D now alters the players position by means of line 20 (to re-emerge from the opposite tunnel) and also updates LC to suit by means of line 70

Note

Only the lower trigger line is actually visible on the screen, the other one is within the program (line 9999) which since it is the very last thing in the program area of memory is effectively one line above the screen (display file — Refer to memory map in ZX manual) The leaves more room on screen for the actual game

200 290	When a screen is cleared updates score, adds another life (or bonus of four lives for reaching screen four), pauses, does 'rollover' effect then prints next maze and resets players position In the unlikely (!) event of a player cleaning the sixth screen the sequence goes back to screen one
270-280	Resets Line-Column variable to coincide with players starting position

Note

One is added on to LC during screens one and two, thus slightly disorientating the ghosts since they now 'see' the player as being one space to the side of his real position. This is done to make the first two screens slightly easier, then in screen 3 onwards the ghosts come up to 'Full strength'

300-395	When player is hit takes away one life flashes both the player and the life that is being used up. User call then returns ghosts to starting positions If all lives used up ends game
400-450	New game resets various variables

500	Selfsave and setting up
630-640	Sets up arrays to hold mazes and maze data
700-770	Storage strings, holding the data for all six mazes in compact '5 bit' form. Note: for greater readability the extreme conditions of zero and thirty one are represented as full stops and X's respectively
800-970	Routine that decodes the data into actual mazes. This consists of three nested for next loops M loop — for mazes one to six X loop — for items of data one to 66 loop — extracted from each storage string N loop — for bits one to five of each item
840	Alters the characters used to build certain mazes. Normal value of 136 gives a grey maze
890	Builds up each maze line 'from the centre outwards' and thus mirrors the maze symmetrically to the left and right
920	Continues X-loop until a line of 30 characters has been built up, line 940 then adds 'ends' to that line and places it into position within the appropriate maze array (M$)
771	Repeatedly concatenates the string of inverse spaces B$ into a whole screen full. Used to give 'rollover' effect between screen
773 774	Shifts the data int he storage strings about so that when decoded different shaped mazes are produced ('second set')

Machine code

The machine code moves the three ghosts, checks for man hit and for screen cleared. All addresses are in hexadecimal.

40A2 40AE	Set up pacs in starting positions using data from the fixed stores (see later)
40AF 40BC	Scan whole screen for remaining dots. If none are found then return to Basic with value of 200, which is then used as the 'GDTO' value in line 90
40BD-40E0	Call bug moves. Puts data from bug 1's store into workspace, calls pac move, then replaces data to store when move completed. Repeats this for pacs 2 and 3.
40E2 40F6	Player hit check. The characters that are to be replaced behind each pac as it moves are held in stores, so by looking at these, if any contains the 'player' character then player must have been hit. If so, jumps to routine at 40F7 which wipes out all the pacs, replaces them at start positions and then returns to Basic with value of 300, so line 90 goes to 'player hit' routine
40F3 40F6	If player not hit, returns to Basic with value of 5, so line 90 continues movement loop to line 5
4112-413F	Set working flag. Sets various bits of working flag (4290) according to pac position relative to players position, i.e. above, below, same line, etc
4141-4166	Move decisions (see flowchart)
4167 416F	Try move towards player line
4171-4175	Try move towards player column
4177 41B9	Movement routines for all four directions. When called, checks if move is valid; if so does move, updates pac line/column and resets carry to zero, if not sets carry to 1
41BA-41FD	Column scan. Scans pac column up and down to find horizontal access to player colum. Having found this, calls relevant movement routine. If no move possible, sets carry
41FF-4259	Line scan. As for column scan but horizontally, *plus* a comparison is made between routines left/right and the shorter of the two is taken
4268-end	Various stores. Information for each pac is held in a standardised order: pac 1, pac 2, pac 3. For each bug, two positions, column, line. Flag byte, chr$ for replacing behind
4266-4279	Fixed stores containing start values (read only)
428C-4291	Working store holding information on current bug being moved

The variables

Players Variables

A	Across movement
D	Down/up movement
IP	Intended position
S	Screen position
LC	Line/column. Represents both line and column position (one in high byte — *256 — the other in low byte) for reference by machine code

Other variables

SC	Score
LYF	Life remaining
MZ	Maze number
X	Marks start of display File in memory
SS	The 'Second set' of mazes are produced if this equals one, main set if zero
S$ (1 to 6)	Storage strings, containing maze data in 5 bit code form
M$ (1 to 6)	Maze strings, into which actual mazes are built up
U$	General-purpose, also used in decoder

Decoder variables.

K	Determines type of character used for walls of maze
S	Single value extracted from storage string for decoding
D	Divisor. Stars at 16 (bit-five) then reduced to 6 to decode bit 4, and so on down to bit 1
U$	String into which each line of maze is built up before being placed into a maze array
A	Code for character produced by decoding current bit

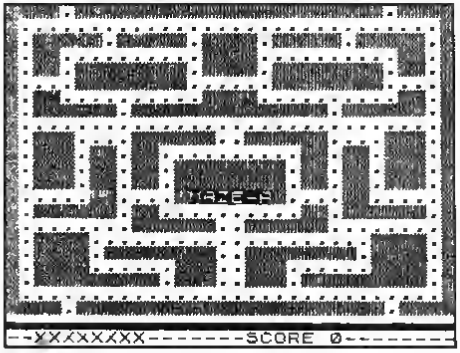

BASIC program listing

```
   3 RUN 530
   7 LET A=(INKEY$="C")-(INKEY$=
"Z")
  10 LET D=(INKEY$="N")-(INKEY$=
"J")
  20 LET IP=S+A+33*D
  30 IF PEEK IP>70 THEN GOTO 100

  40 POKE S,0
  50 POKE IP,61
  60 LET S=IP
  70 LET LC=LC+D+(256*A)
```

```
 80 RAND LC
 90 GOTO USR 16559
100 IF PEEK IP>135 THEN GOTO 90

110 IF CHR$ (PEEK IP)="▄" THEN
LET D=21-(42 AND IP>X)
120 IF PEEK IP=110 THEN LET A=
    31-(62 AND PEEK (IP-32)<70)

130 GOTO 20
200 REM ------NEXT 6CREEN------>

210 LET SC=SC+500*(MZ**2)
220 LET LYF=LYF+1+(4 AND MZ=3)+
(11-LYF AND LYF>11)
230 LET MZ=(MZ AND MZ<6)+1
240 PAUGE 100+(4E4 AND 0C=0)
250 LET M$(MZ,430 TO 435)="MAZE
"+CHR$ (165+(6 AND S5=1)+MZ)
260 PRINT AT 0,0;B$;AT 0,0;M$(M
Z)+"████████████████████████
████------------------SCORE:-----
-----";AT 23,23;SC
265 IF 55=1 OR MZ=4 THEN PRINT
AT 13,0;"  ";TAB 30;"  "
270 LET 6=X+50
280 LET LC=4097+(MZ<3)
290 GOTO 360
300 REM -----MAN HIT/END?----->

301 PRINT AT 1,0;"DEMO ONLY: ER
AGE LINES 301/302  THEN GOTO 400
 TO PLAY"
302 GOTO 200
310 LET LYF=LYF-1
320 FOR N=4 TO 22
330 POKE S,22+RND*2
340 PRINT AT 23,LYF+1;CHR$ N
350 NEXT N
360 RAND U0R 16516
370 PRINT AT 23,1;"-XXXXXXXXXX
XXXXX"( TO LYF)
380 IF LYF>0 THEN GOTO 7
390 PRINT AT 3,29;" ?";AT 2,10;
"--GAME-OVER--";TA0 1;" WOULD YO
U LIKE ANOTHER ONE ? "
395 GOTO 370+30*(INKEY$="Y")
400 REM --------NEW GAME----->
410 POKE 16410,0
420 PRINT AT 0,0;B$;AT 5,1;"CON
TROL KEYS: Z=LEFT  C=RIGHT ";AT
7,15;" J=UP    N=DOWN ";AT 17,2;
"▌▌▌ HIT ANY KEY TO PLAY ▌▌▌"
430 LET SC=0
440 LET LYF=9
450 LET MZ=1
460 LET X=PEEK 16396+ 256*PEEK
16397
470 SLOW
480 GOTO 240
500 REM ---AUTOSAVE/SET UP---->

510 CLEAR
520 SAVE "COMPA█"
COLIN.HOGG(MC)/J.DAVE.ROGERS(0)
530 PRINT "PRESS NEWLINE THEN W
AIT 2 MINS",,,"OR ENTER ""S"" FO
R SECOND SET OF  MAZES"
540 LET S=0
550 LET A=0
560 LET D=0
570 LET IP=0
500 LET LC=0
590 RAND 0
600 INPUT U$
610 LET 66=U$="6"
620 FAST
630 DIM M$(6,704)
640 DIM S$(6,66)
650 LET B$="████████████"
700 REM ------MAZES-DATA----->
710 LET S$(1)="XXN...RTUO.6RXM3
X0O.6XRU...FOE.REUREUREU3..RUFO.
..UFUUE.UEXU...XXNC"
720 LET S$(2)="FTX...UNQUNQUK2U
LQ.5QNLONLQ.HQULQULQU42UTU.TUNTU
...FDUFC6FFM...FTXH"
730 LET 6$(3)="XX67XM..6FGU1UUK
62NNQG1Q5S.K1Q7NIS421TUT..TEN..N
XUG..MURGURN.O6XXMJ"
740 LET 6$(4)="XNX..FFLFES.ELQ6
42MTC.12FNEFGEFXEFXE1GETLE.12UTA
U.2ULQU4.XLF..FXNXD"
750 LET S$(5)="XXX...UNA.N0UNEG
G.NRUG3.MREMREK02L0Q10ATBA13AT0A
S02TFQ1..XUX...XXXR"
760 LET S$(6)="XXN...UUUUUM..MU
UMUUM...XUUXUU...UUMUUMUUU...TEN
TEM..UUUMUUM...XXNW"
770 FOR N=1 TO 6
771 LET B$=B$+B$
772 IF S5=0 THEN GOTO 775
773 LET U$="NXR7XRG.."+S$(N,COD
E "C2V0VF"(N)-20 TO )+S$(6)
774 LET S$(N)=U$( TO 42 )+"1U.5
"+U$(47 TO 57)+"G..NXRNXR"
775 NEXT N
776 LET U$=""
000 REM ---QUIN0IT-DECODER---->

010 FOR M=1 TO 6
020 FOR X=1 TO 66
030 LET 0=CODE 0$(M,X)-20
040 LET K=136+(M=2)+(41 AND M=4
)+(RND*20 AND M=6)
050 LET D=16
060 FOR N=1 TO 5
070 LET A=27+(K-27 AND S/D>=1)
```

```
 880 LET U$=CHR$ A+U$+CHR$ A
 890 IF S/D>=1 THEN LET S=S-D
 900 LET D=D/2
 910 NEXT N
 920 IF LEN U$<30 THEN NEXT X
 930 LET M$(M,32*X/3-31 TO )=
CHR$ K+U$+CHR$ K
 940 LET U$=""
 950 NEXT X
 960 NEXT M
 970 GOTO 480
9999 REM THIS LINE IS ESSENTIAL;
```

Hex dump

```
--------HEX DUMP---------CHECK
80 00 21 68 42 11 7A 42 489
01 12 00 ED B0 ED 58 8C 774
40 2A 7A 42 19 36 88 22 549
7A 42 2A B0 42 19 36 B0 646
22 B0 42 2A B6 42 19 36 554
B0 22 B6 42 C9 2A 0C 40 690
01 18 03 3E 18 ED B1 B1 539
C8 00 C0 3E 03 32 21 40 612
21 7A 42 11 8C 42 B1 06 460
00 C5 E5 D5 ED B0 CD 12 1285
41 E1 D1 C1 ED B0 E0 3A 1409
21 40 3D 32 21 48 20 E3 576
16 83 21 7F 42 01 06 B0 271
7E FE 3D 30 B8 09 15 28 573
F7 01 05 00 C9 36 08 3A 581
7F 42 2A 7A 42 77 3A B5 749
42 2A B8 42 77 3A B8 42 701
2A B6 42 77 B1 2C 01 C9 626
21 90 42 7E E6 01 77 3A 796
32 40 ED 48 8E 42 B8 28 878
06 38 08 C0 D6 18 06 C8 741
DE 18 02 C8 CE 3A 33 40 852
B9 28 06 38 08 C0 EE 18 703
06 C8 F6 18 B2 C0 E6 C8 1141
76 28 02 C0 B6 C0 46 28 827
0F CD 67 41 D0 21 90 42 865
C8 5E 20 B4 CD FF 41 D0 1893
21 98 42 C8 C6 CD 71 41 1055
D0 CD BA 41 C9 C0 5E 20 1223
06 C8 56 28 10 18 B6 C0 606
66 28 1A 18 10 B1 DF FF 718
11 00 FF 18 16 01 21 00 384
11 B0 B1 18 0E B1 FF FF 600
11 FF FF 18 06 B1 01 B8 593
11 B1 00 2A BC 42 3A 91 584
42 77 09 7E FE 40 30 11 739
32 91 42 22 BC 42 36 B8 731
2A BE 42 19 22 BE 42 AF 730
C9 2A BC 42 36 B8 37 C9 937
3A 90 42 21 01 B8 C8 6F 656
20 03 21 FF FF 22 78 40 840
2A BC 42 E5 D1 01 DF FF 1207
89 01 21 B0 E8 89 E8 7E 691
FE 40 D2 7F 41 1A FE 40 1108
D2 77 41 ED 48 78 48 E5 1167
09 7E E1 FE 40 DA 77 41 1126
D5 E8 89 7E E8 D1 FE 40 1392
DA 7F 41 18 D4 AF 32 78 1042
40 11 DF FF C8 4E 28 03 924
11 21 B0 81 00 00 2A BC 283
42 28 04 7E FE 40 38 0A 666
E5 19 7E E1 FE 40 30 F1 1264
18 05 21 7B 40 36 82 2A 488
BC 42 23 BC 7E FE 48 38 799
0A E5 19 7E E1 FE 48 38 1036
F1 18 84 21 7B 40 34 3A 655
78 40 FE 83 20 82 37 C9 791
FE 02 CA 8F 41 FE 01 CA 1101
87 41 78 89 DA 87 41 C3 1177
8F 41 41 00 00 00 80 08 333
80 00 00 00 08 08 BC 01 250
0E 0D B1 A6 BD 01 8F 0D 474
08 8F 8E 01 10 0D 80 AA 644
24 24 24 24 25 25 25 25 356
```

BASIC hex loader program.

```
    1 REM
    2 REM THESE FOUR LINES EACH
      CONTAIN 101 CHARACTERS
    3 REM PLEASE READ TEXT BEFORE
      ENTERING.
    4 REM
8997 REM **********************
8998 REM    SELF CHECKING HEX
            LOADER
8999 REM **********************
9000 POKE 16518,8
9010 POKE 16511,19
9020 POKE 16512,2
9030 FOR L=1 TO 63
9040 PRINT AT 17,4;"OK---ENTER L
INE ";L
9050 LET X=16514+8*(L-1)
9060 GOTO 9080
9070 PRINT AT 17,4;"ERROR,REDO"
9080 INPUT U$
9090 IF LEN U$<17 THEN GOTO 9070

9100 LET C=0
9110 FOR N=0 TO 15 STEP 2
9120 IF U$(N+1)>"F" THEN GOTO 90
70
9130 POKE X+N/2,16*CODE U$(N+1)+
CODE U$(N+2)-476
9140 LET C=C+PEEK (X+N/2)
9150 NEXT N
9160 IF C+L<>VAL U$(17 TO ) THEN
 GOTO 9070
9170 NEXT L
```

University Software

LIBRARY OF ADVANCED MATH/STAT/ECON FOR SINCLAIR ZX81 AND SPECTRUM

TAPE 1 MATRIX OPERATIONS (*), (+) **£9 95**
SIDE A Inversion multiplication addition subtraction scalar multiplication and determinants of matrices and vectors within one single program Any output can in turn be used as the input of the next operation without re typing Capacities 16K ZX81 25X25 16K Spectrum 15X15 48K Spectrum 48X48
Side B Determinants of square matrices

TAPE 2 POLYNOMIALS (+) **£9 95**
SIDE A Includes quadratic equations (as degree 2 polynomials) and Newton Raphson and half-interval search methods for higher degree polynomials Computes the real roots with 8 digits of precision SIDE B Plot of polynomials in any interval values of real roots extremum points

TAPE 3 INTEGRATION (+) **£6 95**
SIDE A Simultaneous integration of two functions by Simpson s and trapezoidal rules Also computes the area enclosed between the two functions SIDE B Plot of two functions in any interval Integrated area shaded

TAPE 4 SUPER-REGRESSION (*) **£14 95**
SIDE A A highly developed multivariate regression program with log/ln option on each variable allowing for exponential and geometric regressions Displays estimated coefficients standard errors t statistics R corrected R F statistic degrees of freedom Durbin Watson statistic variance-covariance matrix matrix of correlation coefficients INTERPOLATION and PLOT of residuals Capacity examples (var xobs) 16K ZX81 2x400 5x200 10x100 16K Spectrum 2X75 5x30 48K Spectrum 2x1850 5x900 10x500 SIDE B Plot of bivariate regressions, slope intercept R standard deviation

TAPE 5 PROFESSIONAL LINEAR PROGRAMMING (*) **£14 95**
SIDE A A user friendly optimiser program capable of handling all sorts of linear programming problems (any combination of <, =, > constraints and X >0 $X_i<0$ ... X <e s gn constraints) Displays the cannonical equivalent of the primal values of slack variables dual problem and its solution Capacity examples (var xcons) 16K ZX81 10x21 15x18 20x13 16K Spectrum 8x8 48K Spectrum 10x45 25x35 50x25 SIDE B Solutions of simultaneous equations

TAPE 6 STATISTICS (*) (+) **£14 95**
SIDE A STATISTICAL TESTS AND DISTRIBUTIONS Chi-square Students t F Mann-Whitney U Wilcoxon s Signed Rank tests and Chi square Students t F Binomial Poisson and Normal distributions Data on many samples can be entered at once sorted and basic statistics displayed Capacity examples (samp xobs) 16K ZX81 1x230 2x110 5x45 16K Spectrum not available 48K Spectrum 2x1300 10x250 20x125
SIDE B DESCRIPTIVE STATISTICS Analysis of ungrouped or grouped data Ungrouped data sorted and grouped Output includes mean mean deviation standard error skewness kurtosis moments Pearson s coefficient etc A comprehensive histogram with up to 30 class intervals class frequencies midpoint values Capacities ZX81 460 16K Spectrum 200 48K Spectrum 2000

TAPE 7 BIBLIOFILE **£9 95**
An academic index ng program to keep record of books and articles Loading and saving of files printing and listing of up to 150 records in alf to searching for an entry and sorting records into alphabetical order It is possible to modify delete and add a record

EDUCATIONAL SERIES

INTRODUCTION TO ECONOMICS SET (48K Spectrum only) Basic concepts are introduced by extensive use of graphics examples and excercises

MICROECONOMICS I (+) **£6 95**
SIDE A Demand and supply analysis demand theory cost-benefit analysis
SIDE B Budget line analysis indifference curves decision making in a market economy

MICRDECONOMICS II (+) **£9 95**
SIDE A Cobb-Douglas production function linear programming and excercises on linear programming SIDE B Theory of the firm, elasticity of demand CES production function

MACROECONOMICS (+) **£6 95**
IS/LM curves national income determination aggregate demand and supply analysis multipliers

ECONOMIC GEOGRAPHY (+) **£9 95**
SIDE A Von Thunen s model of agricultural land use Locational rent and principle of diminishing returns SIDE B Models of agriculturist and urban land use

---

(*) Programs with INPUT CHANGE LPRINT and SAVE-DATA facilities Spectrum versions of tapes 4 and 6 also embody MERGE/READ DATA facilities A common data file can be used with these programs
(+) Recommended for "A" Level first year university and poly students

PLEASE SEND AS SIZE S A E FOR INFORMATION ON MICRODRIVE BASED PACKAGES

Tapes 1 6 £60 Introduction to economics set £35
All inclusive prices for the U K For overseas orders add 50p per cassette
Dealers enquiries welcome
Cheques payable to **UNIVERSITY SOFTWARE, 29 St Peter's Street London N1 8JP Telephone 01 359 0679**

Log Hop

Would be Lumberjack Christopher Gibbs sent us this challenging program from Reading Forest.

A program which is as addictive as this and yet written in BASIC is a rare thing indeed. Christopher has created a game which is not only fast but fits in to 16K with room for titles as well! As can be inferred from the title the game involves jumping over logs and up through gaps to reach the rings at the top of the screen.

You control a running man with keys 5 and 8 for left and right movement and key 0 to jump. If you jump and miss the hole above you, you will be rendered unconscious for a short period of time and may fall through an approaching gap in the level you have reached.

Three levels of difficulty are included and a hall of fame chart for those who become adept enough to reach a good score. Christopher says his highest score so far is 93%, I admit to not getting any score at all — mind you, I wasn't feeling too well. The score is worked out on the time you take to reach the rings. So for a real test of your ability type in this relatively short program — go on, hop to it!

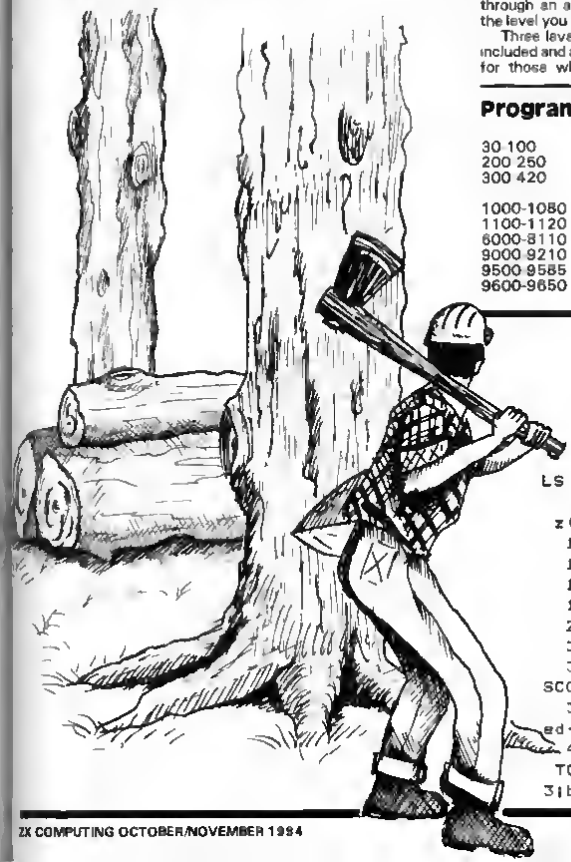

Program structure

30-100	Main loop
200-250	Fall down hole routine
300-420	Death routine, score assessment and hall of fame update
1000-1080	Jump routine
1100-1120	'Reached the rings' routine
6000-8110	Presentation and instructions
9000-9210	Graphics
9500-9585	Random set up of logs
9600-9650	Screen set up at start of game

```
  1 REM ************************
      *Underlined characters*
      *are entered in       *
      *GRAPHICS mode.       *
      ************************
  2 POKE 23658,8
  3 PAPER 0: INK 7: BORDER 0: C
LS
  5 LET HOLE=0: LET game=0: DIM
 z(10): DIM f$(10,3)
  10 GO SUB 8000
  12 LET SCORE=1000: LET dead=0
  13 LET game=1
  15 LET x=19: LET y=10
  20 LET a$="0"
  30 FOR m=31 TO 1 STEP -1
  31 IF SCORE>1 THEN  LET SCORE=
SCORE-2
  32 IF dead>0 THEN  LET dead=de
ad-1: BEEP 0.05,-10
  40 PRINT  INK 6;AT 5,0;a$(32-m
 TO );a$( TO 32-m);AT 10,0; INK
 3;b$(m TO );b$( TO m);AT 15,0; I
```

```
NK 4;c$(32-m TO );c$( TO 32-m);
INK 7;AT 20,0;d$(m TO );d$( TO m
)
  43 IF dead>0 THEN  GO TO 55
  45 IF m/2=INT (m/2) THEN  LET
e$="E"
  46 IF m/3=INT (m/3) THEN  LET
e$="K"
  50 PRINT  INK 6;AT x,y;" ";e$;
" "
  53 IF m/3=INT (m/3) THEN  GO T
O 57
  55 IF SCREEN$ (x+1,y+1)=" " TH
EN  GO SUB 200
  57 IF dead>0 THEN  GO TO 100
  60 LET y=y+(INKEY$="S")-(INKEY
$="5")
  95 IF y<0 THEN  LET y=29: PRIN
T AT x,0;"  "
  96 IF y>29 THEN  LET y=0: PRIN
T AT x,29;"  "
  98 IF INKEY$="0" THEN  GO SUB
1000
  95 LET e$="0"
 100 INK 7: NEXT m: GO TO 30
 200 REM FALL
 205 INK 6
 210 IF x=19 THEN  GO TO 300
 220 FOR n=x+1 TO x+5: PRINT AT
n,y+1;"U";AT n-1,y+1;" ": BEEP 0
.05,20-n: NEXT n
 230 LET e$="E": LET x=n-1: PRIN
T AT x,y+1;e$: LET dead=0*2:
 240 IF SCREEN$ (x+1,y+1)=" " TH
EN  GO TO 210
 250 RETURN
 290 REM DEATH
 300 PRINT AT 19,y+1;"U": PAUSE
2: PRINT AT 20,y+1;"U";AT 19,y+1
;" "
 305 BEEP 0.1,0
 310 PRINT AT 20,y+1;" "
 320 FOR n=y+1 TO 30: PRINT  INK
 5;AT 21,n;"E";  INK 6;"E": BEEP
0.05,30-n: NEXT n: PRINT  INK 5;
 BRIGHT 1;AT 21,31;"E"
 321 FOR n=1 TO 10: NEXT n: LET
SCORE=0: GO TO 330
 325 LET SCORE=INT (1000*(SCORE/1
000))
 330 PRINT AT 2,10;"            "
;AT 3,10;"            ";AT 4,10;"
      ";AT 3,10;"SCORE=";SCORE
;"%"
 340 PRINT AT 17,3; FLASH 1;"PRE
SS ENTER TO CONTINUE": IF CODE I
NKEY$<>13 THEN  GO TO 340
 345 CLS
 350 FOR n=1 TO 10: IF SCORE>z(n
) THEN  GO TO 400
 360 NEXT n
 370 PRINT AT 0,5;"TODAYS GREATE
ST": FOR n=1 TO 9: PRINT AT n*2,
6;n;"=";" ";f$(n);" ... ";z(n):
NEXT n: PRINT AT 20,5;10;"= ";f$
(10);" ... ";z(10)
 380 GO TO 9515
 400 FOR m=10 TO n+1 STEP -1: LE
T z(m)=z(m-1): LET f$(m)=f$(m-1)
: NEXT m: LET z(n)=SCORE
 410 INPUT "ENTER YOUR INITIALS
(MAX 3) ";g$: IF LEN g$>3 THEN
GO TO 410:
 420 LET f$(n)=g$: GO TO 370
1000 REM JUMP
1005 INK 6
1007 IF x=4 AND y+1=po THEN  GO
TO 1100
1010 IF SCREEN$ (x-4,y+1)="0" TH
EN  LET dead=0*2: GO TO 1050
1020 PRINT AT x,y;" C ": BEEP 0.
1,10: FOR n=x-1 TO x-5 STEP -1:
PRINT AT n,y+1;"D";AT n+1,y+1;"
": BEEP 0.05,20-n: NEXT n
1025 LET x=n+1
1030 RETURN
1050 PRINT AT x,y+1;"C": PAUSE 2
: FOR n=x-1 TO x-3 STEP -1: PRIN
T AT n,y+1;"D";AT n+1,y+1;" ": B
EEP .05,20-n: NEXT n
1055 PRINT  INK 7;AT n+1,y+1;"D"
1060 BEEP 0.1,10
1070 FOR k=n+2 TO x: PRINT AT k,
y+1;"U";AT k-1,y+1;" ": BEEP 0.0
5,20-k: NEXT k
1072 PRINT  INK 6;AT K-1,Y+1;"E"
1075 LET e$="E"
1090 RETURN
1100 REM FINISH
1110 PRINT AT x,y+1;"C": PAUSE 2
: FOR n=x-1 TO x-3 STEP -1: PRIN
T AT n,y+1;"D";AT n+1,y+1;" ": B
EEP 0.05,20-n: NEXT n
1115 PRINT AT 0,P0;"I";AT 1,P0;"
J": FOR N=1 TO 10: BEEP 0.1,N: N
EXT N: FOR N=20 TO 0 STEP -2: BE
EP 0.1,N: NEXT N
1120 GO TO 325
9010 LET m$="0   000 000    0 0
000 000"
9012 LET n$="0   0 0 0      0 0
0 0 0 0"
9014 LET o$="0   0 0 0 0 00 000
0 0 000"
9016 LET p$="0   0 0 0 0    0 0
0 0 0  "
9017 LET q$="000 000 000    0 0
000 0  "
```

```
8020 FOR m=27 TO 2 STEP -1
8025 BEEP 0.01,m
8030 PRINT  INK 1;AT 4,m;m$( TO
28-m); INK 2;AT 5,m;n$( TO 28-m)
; INK 3;AT 6,m;o$( TO 28-m); INK
 4;AT 7,m;p$( TO 28-m); INK 5;AT
 8,m;q$( TO 28-m)
8040 PAUSE 2: NEXT m
8045 FOR j=1 TO 3
8050 FOR n=1 TO 6: INK n: PRINT
AT 4,2;m$;AT 5,2;n$;AT 6,2;o$;AT
 7,2;p$;AT 8,2;q$
8055 BEEP 0.01,n+10+(j*2): NEXT
n
8056 NEXT j
8060 PRINT AT 12,6; INK 7; BRIGH
T 1;"BY C.M.GIBBS  1983"
8070 PAUSE 100
8080 CLS
8090 REM RULES
8100 PRINT AT 2,2; INK 7; BRIGHT
 1;"5: LEFT";AT 4,2;"8: RIGHT";A
T 7,2;"0: JUMP";AT 12,0;"DODGE T
HE GAPS, REACH THE RINGS ";"!"
  AND DON'T GET KNOCKED OUT !"
8110 PRINT  FLASH 1;AT 21,3;"WAI
T ONE MOMENT PLEASE"
9080 REM GRAPHICS
9810 FOR n=0 TO 7: READ a: POKE
USR "a"+n,a: NEXT n
9020 DATA 28,28,8,63,40,14,82,35
9030 FOR n=0 TO 7: READ a: POKE
USR "b"+n,a: NEXT n
9040 DATA 28,28,9,254,24,232,136
,12
9050 FOR n=0 TO 7: READ a: POKE
USR "c"+n,a: NEXT n
9060 DATA 66,186,165,82,60,199,6
6,36
9070 FOR n=0 TO 7: READ a: POKE
USR "d"+n,a: NEXT n
9080 DATA 28,28,8,62,85,85,20,11
9
9090 FOR n=0 TO 7: READ a: POKE
USR "e"+n,a: NEXT n
9100 DATA 0,6,2,18,18,210,222,25
4
9110 FOR n=0 TO 7: READ a: POKE
USR "f"+n,a: NEXT n
9115 DATA 0,0,0,12,24,40,196,3
9120 FOR n=0 TO 7: READ a: POKE
USR "g"+n,a: NEXT n
9130 DATA 66,66,66,66,231,165,23
1,0
9140 FOR n=0 TO 7: READ a: POKE
USR "H"+n,a: NEXT n
9150 DATA 195,36,24,146,254,16,5
6,56
9160 FOR n=0 TO 7: READ a: POKE
USR "I"+n,a: NEXT n
9170 DATA 66,66,66,66,231,231,23
1,130
9180 FOR n=0 TO 7: READ a: POKE
USR "J"+n,a: NEXT n
9190 DATA 186,186,254,16,56,68,6
8,198
9200 FOR n=0 TO 7: READ a: POKE
USR "K"+n,a: NEXT n
9210 DATA 28,28,255,8,15,241,0,0
9500 REM STRINGS
9510 DIM a$(31): DIM b$(31): DIM
 c$(31): DIM d$(31)
9515 IF game=1 THEN  LET b=1+INT
 (RND*3): GO TO 9520
9517 FOR b=1 TO 3
9520 FOR n=1 TO 31
9530 LET r=INT (RND*6)
9540 IF r=2 THEN  LET HOLE=1: GO
 TO 9548
9545 IF b=1 THEN  LET a$(n)="@":
 GO TO 9551
9546 IF b=2 THEN  LET b$(n)="@":
 GO TO 9551
9547 IF b=3 THEN  LET c$(n)="@":
 GO TO 9551
9548 IF b=1 THEN  LET a$(n)=" "
9549 IF b=2 THEN  LET b$(n)=" "
9550 IF b=3 THEN  LET c$(n)=" "
9551 NEXT n
9552 IF HOLE=0 THEN  LET A$(1)=
 " : LET B$(1)=" ": LET C$(1)=" "
9553 LET HOLE=0
9555 IF game=1 THEN  CLS : GO TO
 9600
9560 NEXT b
9565 LET d$="@ @@@@@@@@@@@@@@@@@
@@@@@@@@@@@@@"
9570 PRINT AT 21,3; FLASH 0;"
  PRESS ANY KEY          ": PAUSE 0
9575 CLS
9600 LET Z$="E": FOR M=31 TO 1 S
TEP -1
9610 PRINT  INK 6;AT 5,M;a$( TO
32-M);AT 10,0; INK 3;b$(M TO );A
T 15,M; INK 4;c$( TO 32-M); INK
7;AT 20,0;d$(M TO )
9615 PRINT  INK 5;AT 21,0;Z$
9616 LET Z$=Z$+"E"
9620 NEXT M
9625 PRINT AT 19,11;"D"
9630 LET po=2+INT (RND*27): PRIN
T AT 0,po; INK 6; BRIGHT 1;"G"
9640 INPUT "ENTER DIFFICULTY  (1
/2/3) ";D
9645 IF d<>INT d OR d<1 OR d>3 T
HEN  GO TO 9640
9650 GO TO 12
```

Exploring the Sinclair QL — An Introduction to SuperBASIC

Andrew Nelson, £4.95

The QL has a rich new programming vocabulary, and this great book gives you the chance to master the host of new words Sinclair has added. Sure you can use the QL more or less just like a Spectrum but if you do, you are missing the extraordinary power which lies behind the radical concepts of SuperBASIC. Command by command statement by statement Andrew Nelson takes you through the richness of QL SuperBASIC in *Exploring the Sinclair QL — An Introduction to SuperBASIC*. Just £4.95 and available from most book and computer shops. In case of difficulty you can order it directly from Interface Publications using the coupon below. (Trade only. Interface Publications are distributed exclusively in the UK and Eire by W H S Distributors. Export orders handled by Interface Publications.)

Interface Publications, Department QZX,
9-11 Kensington High Street, London W8 5NP

Please send me the following books
I enclose a total of £_____

- ☐ **Exploring the Sinclair QL — An Introduction to SuperBASIC** — Andrew Nelson. ISBN 0 907563 84 8 — £4.95
- ☐ **49 Explosive Games for your ZX Spectrum** — Tim Hartnell. ISBN 0 907563 53 8 — £4.95
- ☐ **Delving Deeper into your VIC 20** — Philip Campbell. ISBN 0 907563 62 7 — £4.95
- ☐ **Creating Adventure Games on your Dragon 32** — Clive Gifford. ISBN 0 907563 67 0 — £4.95
- ☐ **Dynamic Games for your VIC 20** — Mathew Boek. ISBN 0 907563 34 1 — £4.95
- ☐ **Creating Adventure Programs on your Computer** — Andrew Nelson. ISBN 0 907563 36 8 — £4.95
- ☐ **Putting your VIC 20 to Work** — Tom Lau. ISBN 0 907563 46 5 — £4.95
- ☐ **The Easy Way to Program your New Computer** — Tim Hartnell. ISBN 0 907563 60 0 — £3.95
- ☐ **Creating Adventures on your ZX Spectrum** — Peter Shaw & James Mortleman. ISBN 0 907563 58 9 — £4.95
- ☐ **Practical Uses for the Microcomputer in the Home** — David Hole. ISBN 0 907563 59 7 — £4.95
- ☐ **Mastering Machine Code on your Commodore 64** — Mark Greenshields. ISBN 0 907563 69 4 — £7.95
- ☐ **Making the Most of your TI 99/4A** — Scott Vincent. ISBN 0 907563 66 X — £4.95
- ☐ **Dynamic Games for your Electron** — Neal Cavalier Smith. ISBN 0 907563 67 8 — £4.95
- ☐ **The 3-D Animated Apple** — Phil Cohen. ISBN 0 907563 78 3 — £4.95
- ☐ **The Art of Structured Programming** — Peter Juliff. ISBN 0 907563 79 1 — £5.95
- ☐ **Dynamic Games for your TRS-80** — Gail Duns & Tim Hartnell. ISBN 0 907563 63 5 — £3.95

Name

Address

INTERFACE PUBLICATIONS

We're the experts!

Budding Beethovens begin here with Lancastrian J W Casson's 16K computer composer program.

Although limited this program will provide plenty of scope for creative musicians to write and play melodies of the kind usually played on flute tin whistle etc

The two biggest limitations are

1 You can only play one note at a time and
2 You cannot play slurred notes (due to the first limitation)

Perhaps readers with sound boxes and 48K machines can adapt the program to overcome these problems However, the main purpose of the program is to allow musical input into any Spectrum using standard musical notation

Operation

● **KEY** — To tell the computer which note to play — sharp or flat. The computer will first ask "Sharps ?" and expect to enter one by one, the letters of the notes to be played sharp or if none just press ENTER

Next the computer will ask "Flats ?" and expect the letters of the notes which it must play flat, again press ENTER if there are none

● **TIME SIGNATURE** — To tell the computer how many beats there are in a bar

When playing the tune the first note in each bar is played slightly longer than it's written value to emphesise the note After the key inputs have been completed the computer will prompt "Time as a fraction" Enter the required time 3/4 for a waltz, 3/8 for a jig 4/4 for common time etc The screen should now look like fig 1

● **CHARACTER SELECT** — The musical characters of the tune can now be entered, the options are

Normally the NOTE flag will flash

All the options can only be selected from the NOTE mode, to select REST hold R until the indicator flashes, to get back to NOTE mode from REST hold key N

To select SHARP or FLAT hold down S or F as required, to cancel these hold down the opposite key to the option in force ie if in sharp mode hold key F to cancel

● **DURATION** is selected by moving the duration cursor by using the 6 and 7 keys to move it up and down the menu When the correct duration has been chosen press enter If the character is a REST then it will be drawn and the computer returns to character select mode

● **PITCH** selection — a cursor will now appear by the side of the stave and this can be moved up and down again by using the 6 and 7 keys until you reach the position you require When you press ENTER the correct note will be drawn in position on the stave and the computer will return to character select mode

While in the character select mode you also have the following options

'P' Play tune from start to finish

"K + number' List from note of the number given to finish

CAPS + '0' Delete the last note entered

When in PITCH select you can press "D' to return to character select mode

REST	— a period of silence
FLAT NOTE	— a note 1 semitone below key note
NOTE	— a note played as written in the key
SHARP NOTE	— a note 1 semitone above key note

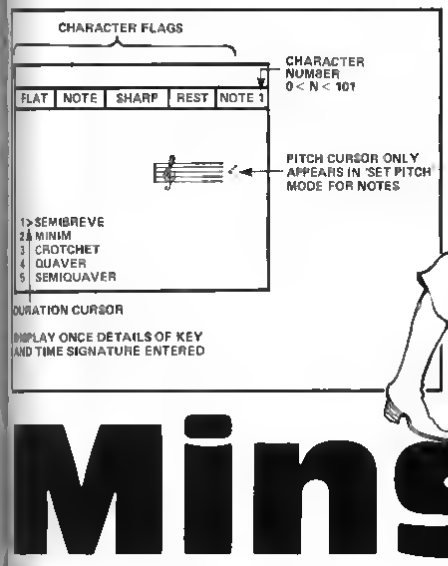

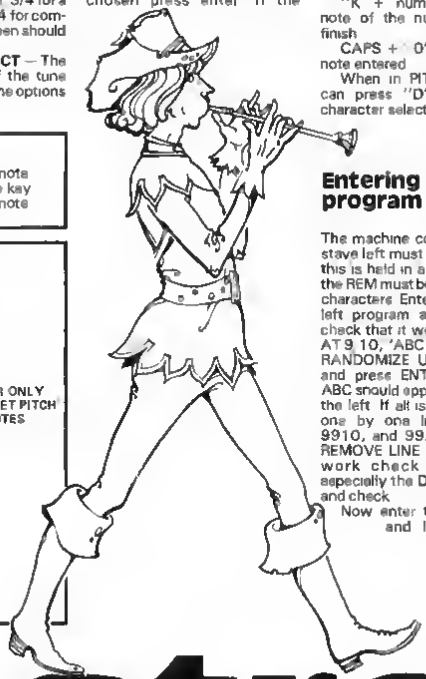

Entering the program

The machine code to scroll the stave left must be entered first this is held in a line 1 REM and the REM must be followed by 32 characters Enter the short scroll left program and RUN it To check that it works type PRINT AT 9,10, 'ABC ' FOR I = 1 to 9 RANDOMIZE USR ec NEXT I and press ENTER the letters ABC should appear and move to the left If all is OK then delete one by one lines 2, 9900, 9910, and 9920 — DO NOT REMOVE LINE 1 ! If it doesn't work check the program especially the DATA and re-run and check

Now enter the main listing and let loose your musical talent

Minstrel

Program notes

1	USR machine code routine to scroll the centre of the screen (lines 8u 15) left
2-160	Initialise variables, set Caps Lock on
300-370	Character input loop
400-490	Pitch select input loop
500 550	Draw note, scroll screen left
1000-1230	Input sharps, flat and time sig
1500 1509	Draw start of stave & treble clef
1510 1541	Draw lines of stave
2010-2500	Compile tune into beeps and pauses
2500-2530	Play tune
3000-3099	Coordinates for drawing rests, notes, bar lines etc
4000 4060	Draw Rest, scroll left
8500 9000	Coordinates listing of tune
9000-956O	Draw note/rest subroutines

Variables

Tim	—	No of whole notes in a bar
BA	—	No of whole notes currently in the bar
T(4,100)	—	Contains tune data as follows
T(1,100)	—	Note or rest type and
T(2,100)	—	Pitch of nota — both as entered by the operator
T(3.100)	—	Actual note or rest length and
T(4.100)	—	Actual pitch of nota — both as compiled
N(1,19)	—	Data to convert number to beep statement
S$(100)	—	Control characters — Sharps flats and barlines
R	—	Rest binary variable
S	—	Sharp binary variable
F	—	Flat binary variable
L	—	Points to current character
C	—	Cursor variable
FN I	—	Converts INKEY$ to var C
FN B	—	Converts note type to duration of beep
FN P	—	Converts T(2 L! to screen coordinate

Scroll left Program

```
    1 REM .....................
.........
   2 LET sc=PEEK 23635+256*PEEK
23636+5
9900 FOR n=0 TO 30
9910 READ byte: POKE sc+n,byte:
NEXT n
9920 DATA 1,0,0,17,0,72,33,1,72,
237,176,6,64,62,0,17,32,0,33,31,
72,119,237,90,16,251,201
```

MINSTREL listing

```
   2>POKE 23658,8:: INK 0:PAPER 7
:BRIGHT 0:CLS :DIM S$(100):LET S
=0:LET F=0
   3 POKE 23674,255
  13 DEF FN I(C,L,H)=C+(INKEY$="
6")*(C<H)-(INKEY$="7")*(C>L)
  25 DEF FN P(X)=50+2*X
  30 LET SC=PEEK 23635+256*PEEK
23636+5
 100  DIM N(19)
 110 DIM T(4,100): LET L=1
 130 GO SUB 1500
 131 LET R=0
 132 LET BA=0
 133 DEF FN B(T)=2/2^T
 135 RESTORE
 140 FOR N=1 TO 19: READ C
 150 LET N(N)=C
 160 NEXT N
 170 DATA -5,-3,-1,0,2,4,5,7,9,1
1,12,14,16,17,19,21,23,24,26
 180 LET C=1: LET OC=C: LET OPC=
1: LET PC=OPC
 190 GO SUB 1000
 301 LET R=0: LET E=L
 310 PRINT #0;AT 1,0;" 1  Semibr
eve                    2  Minim
                       3  Crotch
et                     4  Quaver
                       5  Semiqu
aver"
 320 PRINT #0;AT C,0;">"; OVER 0
 321 BRIGHT 1: PRINT AT 3,0; FLA
SH F;"FLAT "; FLASH NOT R;" NOTE
 "; FLASH S;" SHARP "; FLASH R;"
REST "; FLASH 0;":NOTE ";L; BRI
GHT 0
 322 LET F=(NOT R) AND ((INKEY$=
"F" AND S=0) OR ((F AND INKEY$<>
"S"))) : LET S=NOT R AND (((INKE
Y$="S" AND F=0) OR (S AND INKEY$
<>"F")))
 330 IF INKEY$=CHR$ 13 AND BA+FN
 B(C)<=TIM THEN  LET T(1,L)=C: B
EEP .1,-30: LET BA=BA+FN B(C): L
ET S$(L)=CHR$ ((128*(BA=TIM))): 
LET BA=BA*(BA<TIM): GO TO 420+36
80*R
 331 IF INKEY$="K" THEN  INPUT "
LIST "!NL: LET L=NL: LET E=180:
GO SUB 8500: GO TO 360
 332 IF INKEY$=CHR$ 12 THEN  LET
 L=L-1: LET BA=BA-FN B((T(1,L)!-
10*(T(1,L)>10)): LET BA=BA+TIM*(
BA<0): BEEP .1,-30: LET T(1,L)=0
: LET S$(L)="": GO TO 320
 333 IF INKEY$="P" THEN  GO SUB
2000: GO TO 300
 334 LET R=((INKEY$="R") AND (R=
0)) OR (R=1) AND (INKEY$<>"N")
 340  LET C=FN I(C,1,5): IF OC<>
C THEN  BEEP .05,-30: PRINT #0;A
T OC,0; OVER 1;">": LET OC=C
 370 GO TO 320
 401 OVER 1
 402 LET S$(L)=CHR$ (CODE S$(L)+
50*S+51*F)
 410 PLOT 250,88-PC*2: DRAW -2,2
: DRAW 2,2
 420 LET PC=FN I(PC,1,19)
 425 IF INKEY$=CHR$ 13 THEN  GO
TO 470
 430 IF OPC<>PC THEN  BEEP .05,-
```

```
30: OVER 1: PLOT 250,88-OPC*2: D
RAW -2,2: DRAW 2,2: LET OPC=PC:
GO TO 410
 435 IF INKEY$="D" THEN  PLOT 25
0,88-2*PC: LET 8A=8A-FN 8(T(1,L)
): LET 8A=8A+TIN*(8A<0): DRAW -2
,2: DRAW 2,2: GO TO 300
 460 GO TO 420
 470 PLOT 250,88-PC*2: DRAW -2,2
: DRAW 2,2: LET T(2,L)=28-PC
 480 OVER 0: GO SUB 1510: REM DP
AW STAVE
 490 RANDOMIZE USR SC
 500 LET LI=L: GO SUB 3000
 550 LET L=L+1: GO TO 300
1010 INPUT "SHARPS ?"; LINE I$
1020 IF I$="" THEN  GO TO 1100
1030 LET S=(CODE I$)-63
1045 IF I$="6" THEN  LET N(I)=N(
I)+1
1060 FOR M=1 TO 19
1070 IF (M=S) OR (M=S+7) OR (M=S
+14) THEN  LET N(M)=N(M)+1
1075 NEXT M
1090 GO TO 1010
1100 REM INPUT FLATS
1110 INPUT "FLATS ?"; LINE I$
1115 IF I$="" THEN  GO TO 1200
1130 LET S=(CODE I$)-63
1150 IF I$="6" THEN  LET N(I)=N(
I)-1
1160 FOR M=1 TO 19
1170 IF (M=S) OR (M=S+7) OR (M=S
+14) THEN  LET N(M)=N(M)-1
1180 NEXT M
1190 GO TO 1100
1210 INPUT "Time as a fraction "
;tim
1220 LET S=0
1230 RETURN
1500 REM 1ST STAVE
1501 GO SUB 1510: OVER 0: DRAW -
0,0: DRAW 0,-16
1502 RANDOMIZE USR SC: GO SUB 15
10
1503 PLOT 238,50: DRAW 4,0,PI: D
RAW 0,27: DRAW 2,4,PI/12: DRAW 2
,-4,-PI/10: DRAW -4,-7: DRAW 0,
15,PI/1.2: DRAW 1,12,PI: FOR R=0
 TO 2: GO SUB 1510: RANDOMIZE US
R SC: NEXT R
1509 GO SUB 1510: RETURN
1510 FOR N=0 TO 4
1520 PLOT 239,62+4*N
1530 DRAW 0,0
1540 NEXT N
1541 RETURN
2010 INPUT "TIME FOR MINIM ";T
2020 FOR N=1 TO L-1
2024 IF T(1,N)=0 THEN  LET L=N:
GO TO 2500
2025 IF T(1,N)>10 THEN  LET T(3,
N)=100/2^((T(1,N)-10)): GO TO 20
50
2030 LET T(3,N)=T*2/(2^(T(1,N)))
+T/20*((S$(N-(N>1))(CHR$ 128))
2040 LET T(4,N)=N(T(2,N))+(S$(N)
="2" OR S$(N)="SIN ")-(S$(N)="3"
 OR S$(N)="COS ")
2050 NEXT N
2499 PRINT #0;"TUNE COMPILED PRE
SS ANY KEY": PAUSE 0
2500 FOR N=1 TO L
2510 IF T(1,N)<10 THEN  BEEP T(3
,N),T(4,N): NEXT N
2511 PAUSE (T(3,N)+1)
2520 NEXT N
2530 RETURN
3001 LET S=0: LET F=0
3010 GO SUB 1510
3015 LET R=0: IF T(1,L)>10 THEN
 LET R=1: LET T(1,L)=T(1,L)-10
3017 IF S$(L)="2" OR S$(L)="SIN
" THEN  PRINT AT 15-(T(2,L)/4),2
8;"#": LET S=1
3018 IF S$(L)="3" OR S$(L)="COS
" THEN  PRINT AT 15-(T(2,L)/4),2
8;"b": LET F=1
3020 GO SUB 9000+100*T(1,L)+50*F
3030 REM NOTE ABOVE OR BELOW STA
VE
3039 IF R THEN  GO TO 3000
3040 IF T(2,L)>15 THEN  PLOT 235
,82: DRAW 0,0
3050 IF T(2,L)>17 THEN  PLOT 235
,86: DRAW 0,0
3060 IF T(2,L)<5 THEN  PLOT 235,
58: DRAW 0,0
3070 IF T(2,L)<3 THEN  PLOT 235,
54: DRAW 0,0
3080 RANDOMIZE USR SC
3090  FOR J=5+(S$(L+1)="3" OR S$
(L+1)="SIN " OR S$(L+1)="2" OR S
$(L+1)="COS ") TO T(1,L) STEP -1
: GO SUB 1510: RANDOMIZE USR SC:
 NEXT J
3091 IF CODE S$(L)>=128 THEN  PL
OT 240,62: DRAW 0,16: GO SUB 151
0: RANDOMIZE USR SC
3092 IF R THEN  LET T(1,L)=T(1,L
)+10: LET R=0
3099 RETURN
4030 LET T(1,L)=T(1,L)+10
4039 GO SUB 3000
4040 LET L=L+1
4060 GO TO 300
8021: IF T(2,L)>10 THEN  PLOT 23
5,90: DRAW 0,0
```

```
8500 REM LISTN,E
8510 RANDOMIZE USR SC: GO SUB 15
00: REM TREBLE CLEF
8520 FOR X=0 TO 10
8535 LET L=X+NL
8537 IF T(1,L)=0 OR L>E THEN  RE
TURN
8540 GO SUB 3000
8576 NEXT X
8580 IF L<E THEN  LET NL=NL+Y: P
RINT AT 0,0;"Scroll?": PAUSE 0:
PRINT AT 0,0;: OVER 0;"
  ": GO TO 8528
8590 PRINT BA: PAUSE 0: RETURN
9101 OVER 0
9105 LET Y=FN P(T(2,L))
9110 CIRCLE 239,Y,2
9140 RETURN
9160 PLOT 245,70: DRAW 0,-2: DRA
W 5,0: DRAW 0,1: DRAW -5,0: RETU
RN :
9210 GO SUB 9100
9220 PLOT 241,Y
9230 DRAW 0,11
9240 RETURN
9260 PLOT 245,71: DRAW 0,1: DRAW
 5,0: DRAW 0,-1: DRAW -5,0: RETU
RN :
9310 LET Y=FN P(T(2,L))
9320 FOR D=0 TO 2 STEP .5
9330 CIRCLE 239,Y,D
9340 NEXT D
9349 PLOT 241,Y: DRAW 0,11: RETU
RN
9360 PLOT 245,66: DRAW 0,4: DRAW
 2,0: DRAW -1,3: RETURN :
9400 REM SUAVER
9410 LET Y=FN P(T(2,L))
9420 FOR D=0 TO 2 STEP .5
9430 CIRCLE 239,Y,D
9440 NEXT D
9449 PLOT 241,Y: DRAW 0,11: DRAW
 3,-2: DRAW -3,1: RETURN
9460 PLOT 245,70: DRAW 4,1: DRAW
 -2,-6: RETURN :
9510 GO SUB 9400
9520 DRAW 0,-3: DRAW 4,-1: DRAW
-4,1
9530 RETURN
9560 PLOT 245,70: DRAW 4,1: DRAW
 0,-2: DRAW 3,1: DRAW -3,1: DRAW
 -2,-6: RETURN
```

Across the Pond

Mark Fendrick is a respected American TS fanatic who will be keeping us informed of the latest USA developments.

Welcome to the first of my reports from the United States As you may know, Sinclair research was distributed here under the Timex/Sinclair name Unfortunately, in February 1984, Timex left the home computer market, leaving thousands of us high and dry, without support Following Timex's pullout the major source of information for Sinclair computerists in the USA Sync magazine, ceased publication

An American history of Sinclair computers is in order here

The original Sinclair entry is familiar to you, the ZX-80 Sold only by mail-order through Sinclair Research Ltd U S A , it did not make a big splash but was truly a wonder for those who were handy with a soldering iron

The introduction of the ZX-81 followed in 1982, and it was here that I became aware of Sinclair For $99 95 you could have a fully assembled computer! If you were the do it-yourself type you could get the kit for $79 95 Playing on the safe side, I ordered the assembled version in July of 1982 From that point I was hooked

In the fall, Sinclair announced that Timex, who had been manufacturing the ZX-81, had been licenced to distribute it in North America under the name Timex/Sinclair 1000 It was identical to its European counterpart in all ways but one For the same $99 95 list price it would contain 2K RAM

All Sinclair compatible software and peripherals would work with the T/S 1000 However, the ZX printer which Sinclair had developed could not pass the requirements of the Federal Communications Commission (it put off radio signals which caused radio and TV interference) so Timex contracted Alphacom to produce a printer which would be small, compatible and the same price as the announced ZX printer The result was a slightly larger, separately powered unit — the T/S 2040 printer Most important however, is the fact that it prints black on white thermal paper as opposed to the silver paper used on the ZX printer Also the T/S 2040 is much faster, and quieter (No longer do I have to hide in the other room if I need a print out) You can also get paper that produces blue writing, but that is harder to read, and does not reproduce well

Inadequate Promotion

Unfortunately Timex so good at mass marketing its watches, went into hibernation, and the product fell victim to Timex s failure to promote it properly While Commodore was touting its new C64 Timex placed very few printed advertisements and only two TV commercials Nowhere was expandability mentioned, even though a number of 64K add-ons were available as well as Timex s own T/S 1016 16K unit Even Timex s TV spot said that you should get a Timex before you spend a great deal of money on a "real" computer!

About this time Sinclair in the U K announced the ZX Spectrum We could hardly wait for Timex to come out with the T/S 2000 It was finally shown, looking identical to your now familiar Spectrum Timex decided, however, to improve upon the Spectrum, and delayed the format introduction Now scheduled to be the T/S 2016 (16K) and T/S 2048 (48K), they had been updated, and redesigned The case was now a silver rectangle with a hinged compartment, housing a slot in which to insert the solid state software (Command Cartridges) to be developed The "chicklet" type of keyboard found on the Spectrum was replaced by the soft touch, full size keyboard similar to that of the Brother EP-20 personal printer Yet the introduction was further delayed as more improvements were made Features such as four display modes ON ERR statements SOUND (in addition to BEEP) commands to utilize the four channel synthesizer joystick capacity, bank switching, and an improved LOADing system were added Now the newly dubbed T/S 2068 had a 16K ROM (differing somewhat from the Spectrum s) an additional 8K (bank switched automatically) to handle the cassette interface as well as 48K RAM (The 16K RAM version had been scrapped) The suggested retail price for this was $199 95

Other Improvements

Also at the same time, Timex was updating the T/S 1000 into what became the T/S 1500. The 2K RAM was replaced with 16K built in. The membrane keyboard was replaced by the keyboard now found on the Spectrum All this for $79 95

After lengthy delays, October 1984 saw these computers become available — barely Although I live in New York City I had to travel to Boston to attend the first, and only Timex show sponsored by the Boston Computer Society, to get my computer At that time both Maggy Bruzelius, of Sinclair USA, and Dan Ross, Vice President of Timex Computer Corporation stated that Timex was to take an aggressive stance, and fully support consumers and third party suppliers Also shown but not yet available, were the Timex modem program recorder, joysticks a Spectrum emulator, and the long anticipated micro-drive A full size letter quality printer was also in the works However, the support was no better for the T/S 2068 or the T/S 1500, than it was for the 1000 so as the reviews were appearing in the U S computer magazines (all agreed that this was a superior computer), Timex was announcing its exit from the computer market

Now all the peripherals that we looked forward to were not going to be marketed — at least not by Timex Sinclair said that it had no intention of marketing any of the Timex line, although they were getting ready to introduce the QL here The support you in the rest of the world get from Sinclair, we never received from Timex However, in the months following the pull out, many of the peripherals announced by Timex have indeed become available

T/S 2068/ Spectrum Compatibility

Much of the Spectrum software may be compatible with the T/S 2068, but there are a few problems Due to the reorganization of the ROM, machine code software will rarely, if ever, work on the T/S 2068 All basic programs written for the Spectrum will work on the T/S 2068 but there are occasional problems LOADing them from Spectrum tapes ZX 81 software is, however, compatible with both the T/S 1000, and T/S 1500 I will be investigating software, and will report to the U S owners on what is immediately compatible, so here is a chance for you U K suppliers to get a foothold into the U S If you could forward me a copy of your catalogue, indicating which programs are in BASIC, (along with instructions on how to order from North America), I will compile a list of products (If you desire to send a test/review copy, I can report on those that I know for a fact work)

I have been informed that both Scrabble and Horace and the Spiders have been tested by Timex and are known to be compatible Horace and the Spiders is available in the U S but Scrabble is not When I tried to order from Sinclair in the U K I was told that it could not be sent due to distribution agreements with Timex, and I should contact Timex for availability Come now, Timex negated those agreements, and is importing no software Please reconsider your position and allow North American Sinclair owners to order those titles which are known to work on the TS/2068

Right now ZX Computing is the best resource all Sinclair and Timex owners have, and I thank Ray Elder for thinking of us I look forward to hearing from you from both sides of the Atlantic. Write to me at Post Office Box 2392, Secaucus NJ 07094 0992 U S A

For those of you who are connected to THE SOURCE, my ID # is BCA632

Mark Fendrick

Readers' Reviews

Opinions from the people who play the games and use the programs the most – yourselves.

Defenda
48K Spectrum
Interstella
Software
Mark Tynan

Here's a game for all you arcade game players that suffer from 10p Nitus (lack of ten pence pieces for your favourite machines!) The game is of course – you guessed it – a take off of 'Defender', and a pretty good take off at that. The game features most of the features of the arcade original, including humanoids to be rescued from the grip of the alien landers, mutants, baiters and other little oddities to ensure sleepless nights. There is even a radar at the top of the screen (as in the original) showing how many little nasties are left to be dealt with as dots.

The action and screen scrolling is fast and smooth, enough to prove a real challenge. The graphics are good, very good in fact. When you rescue a falling humanoid, you see a small "500" whizzing past your ship showing the amount of bonus points you received. Very impressive! There is even **reverse**! All in all the game is quite like the "Real Thing" except for the fact that you can use interface II and Kempston joystick interfaces with the Spectrum version (something you can definitely not do with the arcade version!)

Another little advantage of the Spectrum version is the game produces special codes to verify your high scores. Hyperspace is no-problem except for the fact that when you use the hyperspace button, you sometimes get materialised onto an alien which results in an instant ship loss.

The instructions on the inlay card are quite good. There are graphic representations of what the aliens look like in the screen, with the scores for shooting the alien alongside. The only problem is the inlay card instructions assume you know how to play the game Defender already.

My only gripe about this game is that there is no sound during the course of the game – not even the low growl of the engines, or even when you shoot an alien nasty. In fact, the only sound being when a lander takes a humanoid, there is a low series of clicks, and when you go into hyperspace or get killed, there is a sound like something you could make using a FOR-NEXT loop, with a BEEP statement in the middle.

Verdict

- Graphics – 75%
- Instructions – 65%
- Playability – 85%
- Use of Machine – 85%
- Value for Money – 80%

The Train Game
Microsphere
£5.95
John Bourne

Last Christmas the Computer was the in thing for dads to buy their children so they could use it as an excuse to get something they wanted for themselves. Twenty years ago Fathers bought train sets for their sons for the same reason. Now, courtesy of Microsphere you can have the best of both worlds. No longer need one sit with ones legs around the neck as a miniature train weaves its way through make believe tunnels under the lounge chair. Your entire layout appears on the TV screen and, indeed is far more ambitious than the average model railway enthusiast could afford. This excellent simulation gives one the possible choice of two distinctly different layouts. There are 25 switchable points on track A and 19 on track B. Each layout boasts 3 stations and many other novel additions appear as the game progresses.

There are seven levels, so the instructions inform us, but I have yet to reach them all by progression although one can designate which level at the start of the game. The first six levels have five sub levels and level 7 offers nine sub-levels.

Now if you think the running of a railway is simple then forget it, for it takes considerable skill and practice even to control the running of a single train. One has to avoid wrongly set points and derailments due to changing points with the train on them. The disasters are graphically represented on the screen.

There is also the problem of passengers. You have to pick up 25 passengers before progressing to the next sub level and each passenger scores points providing they are picked up in time. If, However, you keep them waiting they will turn white with anger and score nothing when picked up. Indeed if there are angry passengers there when the train arrives then only they are allowed on board and all the others must wait. They may well be white with anger by the time you get to that station again. There is another problem that could well arise. You may allow the station to fill up and then you will find yourself in further trouble.

You are allowed three disasters before the railway looks for another General Manager. A high score column keeps a record of your efforts.

You can stop the whole system while you reflect on what to do next but beware, while nothing is happening your score will begin to decrease. Then there is the odd goods train or express that appears on the system and the only way to get rid of these is to send them from whence they came. Care is needed here for if you inadvertantly direct one of your suburban trains along that line it will disappear for ever.

Every so often a turntable bonus appears but whether you consider this is a bonus is a mater for conjecture.

Realistic train noises accompany the screen image but I found them too regetitive to be enjoyable. Fortunately there is a facility for switching them off.

There are many other problems and eventualities built into the program and these are fully explained in the adequate instructions printed on the cassette inset.

All in all, this is an excellent example of what can be done on even the 16K Spectrum and the program is very addictive. It would be interesting to hear of high scores achieved by others.

There are, of course drawbacks in even the best programs. The letters that designate the points are difficult to see and it would have been very much better if a simple introductory track had been included with say eight points, to enable the user to get in some practice. I have made copies of both the tracks on a piece of card and lettered the points clearly. This card is left near the computer for reference.

I would thoroughly recommend this game to all Spectrum owners and suggest that at £5.95 it is very good value for money.

Fighter Pilot
Digital
Integration &
Flight Simulation
Psion
Mark Stoneham &
David Wright

Of the many uses the Spectrum can be put to, flight simulators seem to have the most lasting appeal and probably utilise its ▶

considerable facilities for memory, colour and graphics more than any other type of commercial software. Two of the best currently available have been produced by two very different software houses. Psion and Digital Integration. The former has many good quality games to its credit whereas the latter has only appeared on the Spectrum scene recently.

Seen on the shelf Psion's Flight Simulator has a considerable and unmistakable head start on Integrations Fighter Pilot as its cover design is a much more eye-catching and tempting piece of printing. The next aspect of the products which is always taken into account is the price; in this case they are both a reasonable £7.95 which should not deter the would be flying ace.

Documentation is both thorough and precise for the two packages although Fighter Pilot's is slightly superior in that it contains pilot's notes and technical data as well as the usual instructions. The notes give advice on your approach, flaps and undercarriage and informs you of your take-off and stall speed. The aircraft's performance and specifications are dealt with in the Technical Data.

Flight Simulation does not have provision for a joystick although it is possible to use the Kempston device with the aid of a conversion tape. On the other hand Fighter Pilot can incorporate one of three: Kempston, AGF and Sinclair Interface 2 (as well as the keyboard).

Both programs load in just under four minutes and result in a list of options. In Flight Simulation there are three in-flight final approach and take off. Having made your choice, you are asked whether you require wind effects or not (the novice should decline as it makes the game considerably harder). Fighter Pilot boasts a more extensive menu containing five options: landing practice, flying training, air to air combat practice, air to air combat and blind landing. As well as this you have the choice of cross winds and turbulence, your pilot rating and controls.

The Fighter Pilot instrumants, from left to right, are as follows: radar and compass which includes your compass bearing and distance in relation to either one of eight beacons or an enemy bomber, depending on whether or not you are in combat mode. Next comes a digital speedometer beneath which sits the flap extension indicator. In the middle of the panel is the artificial horizon

which shows the roll and pitch angle of your aircraft with respect to the ground. Below this is a linear thrust scale followed by digital altitude and vertical speed indicators. Adjacent to these is the Instrument Landing System (ILS) which doubles as a flight computer. On the far right of your console is the fuel gauge, below which is the undercarriage status indicator (i.e. up or down). Finally comes the ammunition indicator and 'kills' so far.

The Flight Simulation instrument panel is somewhat similar but consists almost entirely of dials, which can be confusing when the hands rotate more than once. The controls are from left to right an ILS below which is a radio altimeter which displays your altitude digitally when it is less than 1 000 ft. Beneath this is an undercarriage status indicator adjacent to which is a flaps indicator. Above this is the airspeed indicator which displays your speed in knots. Next comes the RDF clock. This is the principal instrument in your panel and shows your current bearing and your position in relation to your present beacon. Below this there are three digital locks showing your present beacon, your distance from that beacon and its bearing in relation to your aircraft. The altimeter comes next and this is a dial with two hands, the longer giving the height in hundreds of feet and the shorter in thousands. Finally there are the fuel and power indicators.

The maps in both programs are very impressive although the Fighter Pilot one is bigger in order to accommodate the much more powerful aircraft. Both maps are wraperound affairs which can be very confusing when crossing from one side to another. The Flight Simulation map covers 12,288 sq miles and has two runways, club and main. It has seven beacons, one range of hills (1,000 ft high) and three lakes: Orb, Long and Tri. The Fighter Pilot map covers 20,000 sq miles, has two ranges of hills (3 500 & 2 000 ft high), eight beacons and four runways: Delta, Bese, Zulu and Tango. Unfortunately when one displays the map in Flight Simulation one loses the instrument panel thus making prolonged periods of air borne navigation impossible.

There is no sound in Fighter Pilot and hardly any in Flight Simulation (only when you crash) although I am sure most users would rather sacrifice audial effects for the excellent graphics in both programs.

The object of Fighter Pilot (that is when air to air combat has been selected) is to defend the four airfields from destruction by simultaneous enemy bombers which, although of an inferior performance, are capable of devestating effects on both the airfields and your plane. The only aim we could see in Flight Simulation was to educate the user in the art of flying (which it does admirably). However, we would advise the would be pilot to consult a flying manual if he is seriously considering flying!

Although we have not dealt with Flight Simulation and Fighter Pilot to their full extent we have tried to cover most of the important points. On the whole Fighter gives more satisfaction, even though its landscape graphics are inferior. Its controls seem more responsive and we would like to conclude in saying that although both programs are good, Fighter Pilot is more exciting and thus slightly better than its counterpart.

Wheelie
Microsphere
David Wright
Price: £5.95

As the wall printed documentation will tell you "in the 48K game 'Wheelie' you have just taken delivery of the fastest thing on two wheels" namely the Zedexaki 500. During a quick spin on the road you happen to see a sign saying 'PRIVATE ROAD — no speed limit to brave riders.' Being the hero you undoubtedly are, you enter the sinister driveway only to discover that the gates have shut behind you and that you are imprisoned in a labyrinth of horrifying alleys infested with hedgehogs, kangeroos and terrifying birds (all trained in karate of course). As well as the undesirable fauna there are other dangers in store, such as spectacular jumps (over buses or cars) and bricks which you must wheelie over not to mention perilous slopes, patches of dangerous ice and unexpected dead ends. There are only a few petrol stations so you have to watch the revs a bit while you speed about.

On the screen there is a cross-sectional view of four roads at the most and these are connected by steep slopes which can be used by pressing the 'up' or 'down' key according to whether you wish to travel uphill or downhill. To attain the next level you must first find the 'ghostrider', who will be a few miles of your original starting point, and then race him back to the start. If you succeed in beating him he will tell you a code which allows you to jump to the next level, of which there are five. Although the game is

hard, it provides an excellent challenge to the budding Hell's Angel!

The graphics are fantastic especially if you crash. For example if you go too fast down a slope the bike will cartwheel and crush you under its fuel-injected engine, and if you go too slowly over a car-jump you will be thrown over the handlebars. At the beginning I found myself crashing on purpose just to see the amazing effects! As well as this there is a good use of colour and a constant engine revving sounds which is very authentic, and adds to the brilliance of this game from Microsphere.

Kempston, Protek or AGF joysticks can be used and if you possess none of these, there is a routine for defining your own keys which is very helpful indeed.

On the whole 'Wheelie' has all the properties of a bestseller and is great value for money. It combines excellent graphics with stunning sound to create one of the best and most addictive games I have ever seen for the Spectrum.

Handicap Golf
Computer Rentals Ltd
Owen Brooker
Price: £5.95

The title is misleading as no handicap is used in this game. The inlay card gives a brief description of the game but the instructions on the program are sufficient in order to play it. The program takes about 5½ minutes to load and you are greeted with the information that the course is 6444 yards and your set of clubs consists of 4 woods, 8 irons, a pitchwedge, a sand-wedge and a putter.

Next is seen the course of 18 holes, their par and the distance of each hole. The overall par for the course is 70. The clubs are then shown and the expected distance for each one. There is a wind factor (or slope of green when you get there). This affects the distance and accuracy of your shot. It is displayed by a number between 0 and 9 for the strength of wind and an arrow showing the direction of the wind.

The capacity of the game is for one or two players. You are asked if you want a preview of the course or to start the game. If you ask for a preview the computer will take you through all the holes and their different views. This is not worth seeing as you can see a preview of each hole as you come to it.

When starting a hole, the view is displayed, the amount of yards in the hole, the score taken so far to this hole and the par for the hole. The graphics are good and well laid out showing trees, bunkers and water hazards. Also, if you go off the edge of the screen at either side you are told that you are out of bounds and must take the shot again.

Before each shot you are asked which club you wish to use. This is a simple matter of moving an arrow to the desired club and pressing 'ENTER'. After this, the view is displayed again and you are asked to move the direction indicator up or down taking into account the wind factor. The animated golfer hits the ball, hands the club to the caddie and walks to the ball during which the process of club choosing is repeated until you reach the green.

On the green, a close up is observed and your ball is seen along with the hole. A direction indicator runs round the screen and you have to stop it in line with the hole and your ball. The power is then asked and you move the indicator as high or low as you wish depending on the distance to the hole. This repeats until the ball has been holed. You are then told your score for that hole. You then go to the next hole and repeat the process. At the end of the round the player runs into the clubhouse for a drink but the poor caddie has to go back home! You can then see your card for the course and you are asked if you wish to play again.

This is very good game and the graphics are exceedingly good. The main rules of golf are followed and at £5.95 it is well worth the money. I highly recommend it.

Starfire
Virgin Games
Nigel Stutt
Price: £5.50

I must admit that I would not have gone all out to find and pay £5.50 on it, its front cover not being too eye-catching. But when I received Starfire as a present, I was pleasantly surprised. Its clear, extensive instructions and excellent colour photograph of one of the screen dumps in the game, do a great deal for the user. There is even a condensed list of all control keys used for easy access when playing the game (and I must say, you certainly need it for at least your first ten games). There is also information on the author of the game which is a very good idea as it gives an indication of how long the program took to write, etc.

Once the program has spent four minutes loading (my copy loaded every time) your name is entered and the skill level chosen, of which there are 10. Number one (ZX80 Brain) is supposed to be easy, but I haven't found it easy to complete yet, and level ten is the hardest (impossible is a better word). I am just about up to level two (ZX81 Brain) and I have had the game for two months now!

After this interaction, a data sheet appears informing the Starship Captain (you) for the number of aliens to kill, star bases to refuel at, and time available to do all of this in.

Eventually, the game starts and the controls provided can be called up from the shipboard computer. Briefly these are -

- Abort — abort attempt at alien or starbase.
- Battlestations — to attack the aliens using keys B,H,F,T and 4 to fire.
- Computer Call — calls up a list of controls for the forgetful, damage to ship, or energy distribution.
- Dock — to dock with star base (if you're lucky) for refuelling and repair.
- Long Range Scan — to see which are the lucky aliens to be blasted this time or to locate starbases.
- Navigate — to move from one subsector to another.
- Galactic War Report — shows how many aliens, star bases and stardates (time) remain.
- Smart Bombe — the ultimate in weapons, destroys all aliens and starbases in adjacent sectors and usually yourself if you haven't enough power left.

The graphics when used are relatively slow with a slow reaction time on the keyboard but this, however, does not make the game any worse as the alien stops moving and firing when the button is pressed. This makes the game easier on level one while still being difficult on level ten as the alien is moving so often that it is usually impossible to get him (it) into your sights.

The game is mostly in 3D but there are a few screens when two dimensional graphics are used. These are when the ship needs to navigate an asteroid field, time portal or dock with a starbase. In these, the ship is seen in 2D as the precision and skill needed would be lost in a third dimension.

The whole program is written in BASIC and is easily listed. The REM statements make the listing easy to understand and I have seen a couple of areas that I have not come across in the game yet, such as a black hole and a self destruct mode. The game runs for over an hour and one disappointment at the end is that no score is employed thus, skill needs to be determined by the amount of aliens destroyed, my total being twenty-one.

In a summary, then, I found the game exciting, strategic and enjoyable though it could be vastly improved with better graphics.

Starfire runs on the 48K Spectrum.

The 80 in 84

Mike Hyams is one of many who still use the ZX80 and here he presents some valuable tips to all it's fans.

Hi there. My name is Zeddy. (What do you mean you've never heard of me? I bet you've never heard of Tim Hartnell either.) Anyway, there I was, waiting for a number 84 databus to come along when all of a sudden this geezer shovs a ZX printer into my I/O port. Well, I know I've only got a 4K ROM and there ain't no way that I'm going to get that printer running, when all of a sudden

I think it would be wise to stick a ' But seriously folks" in at this point. Because this article isn't just about interfacing ZX printers with ZX-80's it's about the wealth of hardware available, or nearly available, for the 4K ROM ZX-80.

In most peoples eyes the ZX 80 died when the 81 was announced in 1981. At that point there were about 50,000 80's in Britain alone. Add to that the 85,000 in the USA and the rest of the world and you have a force to be reckoned with. Except, of course, not many people bothered. The ZX 81 and the Spectrum each had an "essential" hardware extra announced at launch. These were the printer and, after a while, the microdrive. The hardware add-ons offered by the independent companies have reflected the quality of Sinclair's own. For example speech, sound, joysticks, and son on. The ZX 80, however, only had a 16K RAM pack as its extra. Revolutionary as it was then, it hardly compensates the 80 owner of today, who sees so much zap-pow-boom going on around him/her, that a dash to the nearest computer retailer is imminent, if it hasn't happened already.

But do not despair, for help, and hardware, is at hand. I will now make a bold and sweeping statement. At least 50% of ZX 81 hardware will work on a ZX 80. There, I said it. And it didn't even hurt. I'm going to get a bit technical for a couple of paragraphs, so those of you who shudder at the sight of strange words with lines over them can go and amuse themselves with figure 1. By the time you've finished playing with that, us hardware buffs should be finished.

Now then. The words I just referred to above are ROM CS and RAM CS. These are very important to all Z80 based computers, (and more than likely all other computers, but that doesn't concern us). First of all let us consider the port at the back where you would plug in a RAM pack. If you compare the circuit diagrams of the 80 and the 81, you will find that all but one of the tracks on the port match. Address line one is in the same place on both machines, so is the 0 volts line, and so on. All except for track 23B, which is on the extreme right underside of the port, looking at it from the front. On the '80 this track is not connected, on the 81 it is the ROM CS line. So what? Well, as you will see, it has an effect on what hardware can be used.

Having established the differences between the two computers we can now move on to Technical Bit number two. (Those of you who are getting a bit bored with all this talk of ports and tracks, try ordering a QL and find out what REAL boredom is all about.) There are two methods of making your Sinclair talk to a hardware add on. One is by using memory locations and the other is by using Input/Output ports. An I/O port is a sort of lateral-thinking version of the memory. If I were to compare a computer to a human being (and who doesn't these days) the computers memory would be like the brain, whereas the I/O would be things like hands, eyes and mouth. As its name suggests, the I/O port is the computers link with the outside world. On the Z80 chip there are 256 of these ports, but some are unavailable for use on the '80. They are used for the keyboard, cassette, and TV, but fortunately for us, the same ports are used on the 81. Fortunately, because this means that any hardware designed for the I/O port on the 81 should work on the '80.

"Aha", I hear you cry. And those of you still playing with figure one should come back for Revelation number two. The ZX printer is purely I/O driven. The port it uses, F8h, is well documented in the manual supplied with it. So we turn to figure two. This is a relocatable machine code routine for using the 4K ROM ZX 80 and the ZX printer together, using the equivalent of the COPY command.

As a brief aside, while some of you are rushing out to buy ZX printers, you might consider 16K of RAM. When extra RAM first appeared for the '80 the cost was over £60 for just 3K. 16K packs can now be bought for less than £20. I know that they are made for the 81, but I think you'll find that they work on the '80 as well. I use Sinclairs' '81 rampack and it works perfectly.

To get back to the printer listing, you will notice that the machine code part is in hex. This is more convenient than decimal when a large amount of data is being entered. The second byte of the code, which is the third and fourth characters in string A$, tells the computer how many lines to copy. For a normal screen copy this is set to 23, or 17 in hex. If you would rather use the routine as an LPRINT command, this number can be

```
  10 PRINT ,"REACTION TESTER"
  20 PRINT
  30 PRINT "WHEN PROMPTED PRESS
N/L. AFTER A SHORT PAUSE THE SCRE
EN WILL      RE-APPEAR. PRESS N/L
 AS QUICKLY AS POSSIBLE."
  40 PRINT
  45 LET M1=0
  46 FOR N=1 TO 10
  50 PRINT "PRESS NEW LINE TO CO
NTINUE"
  60 INPUT Z$
 110 CLS
 115 PRINT "ROUND ",N
 120 PRINT "GET READY THEN PRESS
 N/L"
 130 INPUT Z$
 140 LET X=200+RND(400)
 150 FOR M=1 TO X
 160 NEXT M
 170 POKE 16414,0
 180 POKE 16415,0

 190 INPUT Z$
 200 LET X1=PEEK(16414)
 210 LET X2=PEEK(16415)
 230 LET X3=X1+X2*256
 235 PRINT
 240 PRINT "TIME TAKEN = ",X3
 241 PRINT
 250 LET M1=M1+X3
 260 NEXT N
 270 PRINT "PRESS N/L FOR RESULT
S"
 280 INPUT Z$
 300 LET M1=M1/2
 310 LET Z$=STR$(M1)
 320 IF M1/999 THEN LET Z$=TL$(Z
$)
 330 LET M1=M1/1000
 400 CLS
 410 PRINT "AVERAGE REACTION TIM
E"
 420 PRINT
 430 PRINT M1," ";Z$," SECONDS"
```

reduced. For example to dump just one line to the printer, change the second byte to a 1. This is done by either changing the "17" to "01", or by poking the relevant memory location with a 1 i.e. if the code is stored from 32,000 onwards then poke 32001 with a 1. This will then COPY the first line on the screen to the printer. To activate the routine just use a USR function. The way figure two is set at the moment, RANDOMISE USR (30000) will produce a screen copy. If you put the code lower down the memory to say, 18000, then a call to that address will activate it.

```
9888 REM
                DO NOT USE "NEW"
              AFTER RUNNING THIS
                   PROGRAM

9900 LET A$="16172A0C40CEE5AF5FD
3FBE1DBFB67FADE0830FBE5D57AFE029
FA307A3574E7923FE762824E5C827878
72607CB14836FC8119FAE4F06087AC81
11F67D6FB1F30FB7CD3FB1DF1E1185D
8FB1F30FB7A0FD3FBD11CC85B28B1C11
520AA3E04D3FBC1C9"
9910 LET X=30000
9920 POKE X,CODE(A$)*16+CODE(TL$
(A$))-476
9930 LET X=X+1
9940 LET A$=TL$(TL$(A$))
9950 IF A$="" THEN STOP
9960 GO TO 9920
```

For machine code freaks, I can tell you that this routine can be adapted to produce hi-res graphics on the printer. I won't tell you how, but I'll give you a clue. The ZX-80 character set starts at 3584 (or 7 x 512) and the pointer is stored in register H, so if you can find the instruction LD H,7 then you're halfway there. The rest is up to you (unless Ray gets lots of letters in which case I may explain further. Never let it be said that *ZX Computing* doesn't make you think.)

We now know enough about the I/O port to say that ALL I/O mapped products should work on the 80. After the printer and RAM pack, the most popular extras would appear to be speech and sound. A quick flick through the pages of this mag should produce two or three adverts for these on the 81. If you are interested in purchasing one of these for your 80 then check with the manufacturer first, to see if it is I/O or memory mapped. Remember, if it is memory mapped it will probably have a connection to the ROM CS line which isn't connected, so it more than likely won't work.

Two units for the '81, ZXM and ZXS, made by Timedata, ARE I/O mapped and DO work on the 80. These are sound (music) and speech synthesizers, but unfortunately Timedata has withdrawn them from sale, probably due to lack of demand, although the official reason is "No reason". It might be worth giving them a call just in case they still have a few in stock, as they were fine products. Alternatively there are others still on sale. The Chattarbox from William Stuart Systems is also I/O mapped (or it was last time I looked) as is the ZONX-81 from Bi-pak. These units, speech and sound respectively are still available, and could well extend your ZX 80 beyond what you thought possible. There are others, such as the Cheetah Sweet Talker, but I'm afraid I haven't had time to check what type of mapping is used.

One point to bear in mind when using these I/O units is how you are actually going to program them. Because they are I/O, you have to use the instructions IN and OUT. After a series of finger stretching exercises you can get to these in Spectrum Basic, but on the '80 and '81 they are only available via machine code. Most, if not all, the above products come supplied with instructions on how to do this, but it will require some effort to implement these if you haven't used m/c before. You could always ask a friend.

While browsing through the ads, looking for things to hand on the end of an '80, I came across two items that could be placed inside the case. The first is from P.V. Tubes and appears to be a 8K ROM chip. Those of you hankering after string-slicing and real numbers (but not SLOW) might like to give them a call. The other chip is a Forth ROM from David Husbands Skywave Software. This may or may not work on the 80 because of the lack of SLOW hardware. Again a phone call should clear things up.

Before we leave the subject of I/O, a quick mention of Msplins I/O port. For those of you who want to control your central heating or perhaps run Fulham Power Station, this could be what you've been looking for.

My next few notes are, I'm afraid, rather hazy. I know the technique, I have read that it works, but I just haven't got the nerve to do it. What I refer to is the ROM CS connection. For those who wish to throw caution to the wind (you fools) here is the theory.

The ROM CS pin must be connected to track 23B. To do this break the track leading to pin 20 of the ROM chip, and put a 680 ohm resistor across the break. Then take a wire from this pin to track 23B on the edge connector. This track should be labelled on the circuit board. This now gives a ROM CS for all add ons. The amount of hardware that can now be used increases significantly with this change. I have not made this connection, but I would be interested to hear from anybody who has, and what they use that takes advantage of it.

If you look at figure 3 you can see how the 80 memory is arrangad. It appears that there is more than one ROM, although there is obviously only one. The problem is that the '80 has been built in such a way that chunks of memory keep repeating throughout the memory map. If you want to use an add on that uses part of the memory with a ROM copy in it, then your stuck. Unless you have connected the ROM CS track. This hardware will try to turn off part of the memory, usually the 8K – 16K bank. If the connection is made, the unit should work.

One of the most interesting add ons that utilises the ROM CS line is an EPROM programmer. These are available from, amongst others, Eprom Services and Camel Products. Even if you have moved onto another computer, the possibility of using an old '80 to make your own ROMs must interest a few of you.

Other peripherals that use the ROM CS track are the range from Memotech. These unit will need some careful inspection before use as some of them may use ROM calls in the firmware supplied. One Memotech unit that should work is the keyboard. As it uses the I/O method it should be alright, but the legends on the keys will need changing. The DK'tronics keyboard would be just as good, but the wires would need to be soldered in as there are no sockets, the keyboard being part of the circuit board.

On the memory pack side, 32K and 64K RAM packs should work with the aforementioned connection. Quite how you can poke a location greater than 32787 from BASIC I'm not sure, but I expect someone has added it.

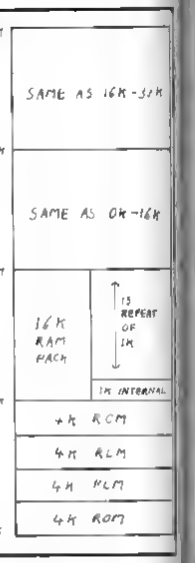

Well that just about wraps it up. I hope I have shown you that the ZX 80 is not dead, but merely resting. If you have any problems then call the manufacturer, most are only too pleased to help, and there's usually someone near the phone who knows the technical ins and outs (no pun intended). Or write to me at the Golden Square address and I'll do my best to help.

The program in figure one, by the way, is a little routine that some friends and I nearly used to study the effects of alcohol on reaction speeds. However we never got round to using it because we were too busy trying out alcohol supplies. Try running the program before and after 10 pints up. You may be surprised by the results.

If I can convince Ray to give me some space in a future issue I'll go into the mathematical aspect of using your '80. With a little bit of software and a little bit more understanding I'll show you some repetitive floating point maths. Now where did I put my Log tables?

The Key to Spectrum Machine Code Success.

Picturesque's **MACHINE CODE SYSTEM** is used and recommended by professional software writers, yet the excellent documentation and the friendly, easy-to-use programs have been highly recommended for beginners.

You will only buy one Machine Code System, so buy the best, the one the professionals use.

NEW IMPROVED PROGRAMS — MICRODRIVE COMPATIBLE

ASSEMBLER

Completely self-contained with its own line editor giving an easy to read 40 column tabulated listing. Auto line numbering, line renumbering and auto tabulation make this one of the fastest and easiest Assemblers to use. 5-character label names. Decimal, Hex or ASCII constants. SAVE/LOAD/VERIFY both the listing and Machine Code to cassette/MICRODRIVE/NETWORK. Assemble from cassette or Microdrive into memory for very large programs. Customise to most Centronics printer interfaces or RS232 (with interface 1) for 80 column printout. FAST ASSEMBLY — 1k of code in 7 seconds. Assembler Directives — ORG, END, DEFB, DEFW, DEFM, EQU, DEFL. (Microdrive and Centronics facilities only operate with 48K machines.)

£8.50
INCL. VAT & P&P

MONITOR

The ideal tool to help the beginner get started, yet it contains all the commands for the experienced programmer to run and de-bug machine code programs. Inspect and alter memory contents in Hex or ASCII. Breakpoints and full Register display. NOW WITH SINGLE STEPPING through RAM or ROM. Disassemble any part of memory, RAM or ROM. Dec Hex/Dec number converter. Printer output to ZX printer or via RS232 (with interface 1) or customise to most Centronics printer interfaces. General memory management commands include Hex dump, Insert, Delete, Fill and Move. Can reside in memory with the Assembler (48K machines only) to give a complete Machine Code programming system.

£7.50
INCL. VAT & P&P

Programs supplied on cassette. Microdrive Save not + Microdrive cartridge not supplied.

Existing owners can obtain the new programs by returning the **cassette only** to Picturesque, along with a cheque/PO for **£1.50 per program** (inc. VAT & P&P). New cassettes will be supplied by return of post.

Available from the SPECTRUM chain of stores, branches of John Menzies and all good computer shops or by mail order by sending cheque/PO to PICTURESQUE, 6 Corkscrew Hill, West Wickham, Kent, BR4 9BB. Send SAE for details.

PICTURESQUE
PICTURESQUE
PICTURESQUE
PICTURESQUE

NEW

ZX Spectrum and QL Microdrive Storage Box £5.95

- HOLDS 20 CARTRIDGES
- FULLY INTERLOCKING
- CENTRE SECTION FOR INDEX CARDS
- DESIGNED TO MATCH SPECTRUM AND QL

Transform Ltd has now produced a smart new **Storage Box** for the **ZX Spectrum and QL**

The Transform Microdrive **Storage Box** is attractively designed to match both the Spectrum and QL

It will hold 20 Microdrive cartridges (enough to store **1.6 megabytes** of data!)

The Microdrive Storage Box is fully interlocking and will allow you to expand your system with all the new programmes on microdrive as well as enhance the 'smart' efficient look of your office/study

Simply write or telephone

TRANSFORM LTD.

DEPT ZX, 'SWATLANDS', LUCKS LANE, PADDOCK WOOD, KENT TN12 6QL 089 283 4783

For fast delivery quote your Credit Card/Access Barclaycard number

Club corner

Contacts worldwide — consult our club page!

Mid Cornwall ZX Club

Dear *ZX Computing*,
Please give our 'ZX Computer Club' a plug

Mid Cornwall ZX Club,
CO-OP Rooms,
8, Victoria Road,
Roche,
Cornwall PL26 8JF
Tel 0726 890473

We meet Mondays and Friday, 7 to 9pm

Yours sincerely,
Mike Richards

Blackburn Computer Club

Dear *ZX Computing*,
I am handling the publicity for the Blackburn Computer Club, which is non-machine-specific Club

The Club is open to everyone, regardless of age. It doesn't matter if you haven't got a computer of your own. If you are still reading this, then you must be interested and that is all the matters.

You don't need to own a particular brand of computer to join in — at present our members have machines which range through BBC, Atari, Dragon, Spectrum, ZX81 and so on. If you have a computer of any make — or are thinking of buying one — then we'd like to hear from you. We can offer the chance to meet other people with the same or similar interests. The atmosphere at our meetings is friendly and informal, with the accent on enjoyment. If you don't want to talk then there's usually the opportunity to play a game or two. Bring along our own machine to show us if you want — that's what the Club is all about. If you want anything else out of the Club then all we ask is that you tell us.

When you first come along to a meeting, we will ask you for 50p as a cover charge. If you join during the meeting then your 50p will be refunded in exchange for your subscription. At present the subscriptions are: Juniors — £3 per annum; Adults — £5 per annum; Family — £10 per annum. Once your subscription is paid then there is nothing further to pay to attend normal meetings for the next year. Membership at present stands at about 20, but this is steadily increasing.

The best way to join is to come to a meeting: these are held every other Monday night, at 7.20 pm, at The Fernhurst Hotel, Bolton Road, Ewood. At the bottom of this sheet are the details of the next three meetings (as at the date of preparing this leaflet).

If you have any queries then please contact any of the following:

Bob Hillyard,
34 Palatine Road,
Blackburn
or
John Schofield,
1 Sutton Street,
Feniscowles
Tel 60033 or 28127

FLUSIB

Dear *ZX Computing*
In the centre of Belgium a new and already flourishing club is born: the FLemish Users of Sinclair in Brussels (FLUSIB). Already about 25 members meet each other at least twice a month in order to exchange experiences, literature, programs etc. And even guests are welcome!

From October on, every first and third Thursday of each month a new series of free lessons will be given, with the view to give a solid base to all members for their own designing and developing of well structured and correctly running programs. And above all: the club is a non lucrative one, run in the most efficient possible way by the members itself.

Join it, and write for more details of chairmen Erick van-Dyck, Trafcentrum, Dapperheidsplein, 1070 Anderlecht, or phone him (after 19 h.) on (02) 76 76 22 3, or simply try it out by attending a meeting on the first or the third Thursday of the month.
Yours sincerely,

Erick Van dyck
(chairman)

P.S.: thanks for your support by publishing this letter in your ever interesting magazine's club corner.

Canada ZX

Dear *ZX Computing*,
Talk about a long distance users club!

First to introduce myself, Roalof Mulder (Bob). In essance I am the Administrative officer **and** Editor in Chief of the Timex/Sinclair Users Group Ottawa/Hull Chapter. We hold regular monthly meetings and discuss hardware and software, swap programs, hardware projects and program development. Our group of approximately 50 members cover a range of doctors, lawyers, engineers, public servants and housewives and labourers.

Our interests encompass all aspects of hardware development from small modifications to robotics, software development from business and education to game programs and programming from the all pervasive Basic to Forth, Logo, Pascal, Cobol, and the ever mysterious machine language.

In other words, if it has anything to do with Timex/Sinclair. Sinclair computers and products, then we are most interested.

Membership in our group is entirely free and we would be pleased to include your group name as a member of our group. In doing so, you would receive a newslettter whenever they are published, as well as have a forum where in which you may wish to submit comments, reviews/programs/for sale etc.

The only thing we ask is to be members (collectively) of our group. I would appreciate your response, even heaven forbid, to the negative.
Yours sincerely
R. Mulder.

Turkish delight!

Dear *ZX Computing*,
We would like to inform you that since one year we have a ZX Users Club in operation in Turkey with 740 members. We are publishing a monthly bulletin in Turkish. We are also receiving special discounts for club members from *Computer* shops for equipment, publications and software.

It would be appreciated very much if you would kindly publish this letter in *news and ideas* with *other user groups*.

Yours sincerely,
Tuncay Turkeli
Bilgisayar Kulubu
(Bilicag Bilgisayar)
Dunya Saglick Sok. Operat Han
41/11 Taksim/Istanbul
Turkey
Phone 149 16 43/144 52 61

Kempsey contact

Dear *ZX Computing*,
My name is Jason Ellem. I would like to start or join a club in Australia. If there is no club I would like people to write to me at the below address. If there is a club I would like to know about it. So please write to the same address.

Yous sincerely,
Jason Ellem,
148 North Street,
Kempsey, N.S.W. 2440
Australia

Bookshelf

Read all about it with Patrick Cain.

An Expert Guide to the Spectrum — Mike James

If your bookshelves are already almost full of "Instructions to ", Beginners Courses in " and other elementery texts for better Spectrum use than I suggest that you may well find an Expert Guide to the Spectrum " by Mike James a worthwhile addition to make. Of course books for Spectrum users at all levels proliferate and there is nothing new in books for more advanced reading, but maybe its because this one says what the best part of most of them do that I found it such a good read.

Mike James is the author of several very successful books on programming and many more to come I'm sure. Why am I being quite so generous with the praise? My temperature feels all right. I don't think I need a holiday. I must confess I would be getting worried if it wasn't for the blatant fact that Mr. James is a very good writer and deserves any praise — at least for this book, let's not get carried away — that I might lavish.

He doesn't mess around prattling on about this that and the other before finally making a stab at the topic in question. I get the feeling that he now knows his subject so well that he didn't need to use any notes. His familiarity with the subject shows. As a result the text doesn't labour, moving quickly from point to point while at the same time being aware of the reader and possible areas of difficulty. The text is concise but accurate and clear and a stimulating read.

1·8 million Spectrum users can't be wrong (figures approx correct at time of writing i.e. 6.45pm), the Spectrum is a remarkable machine and as such enables programmers to do remarkable thing with it. Logically an investigation of these remarkable features will enable programmers to put them to good use. The reader is required to have no more than a working knowledge of basic to undertake this investigation.

Chapter one, an overview of computer hardware in general, examines busses, addresses, data and bit patterns and effectively establishes the funadmental relationship that exists between them — Ah! so that's why the highest address is 65535. Chapter two is more specific to the Spectrum, the intention being that a knowledge of the hardware will influence the readers approach to software, and to this end the memory, the video display, input and output devices and the U.L.A. are discussed. Much of the material of the first two chapters is used and developed further in later chapters dealing with more specific topics.

As important as the hardware, the software, the ZX Basic is looked at in chapters 3, 4 and 5. In all there are twelve chapters covering the above, the video display, video applications, tape, sound and printer, interface and microdrives, communications and advanced programming applications.

Readers may well have to turn back a few pages sometimes, indeed the author recommends that the reader should read from front to back ▶

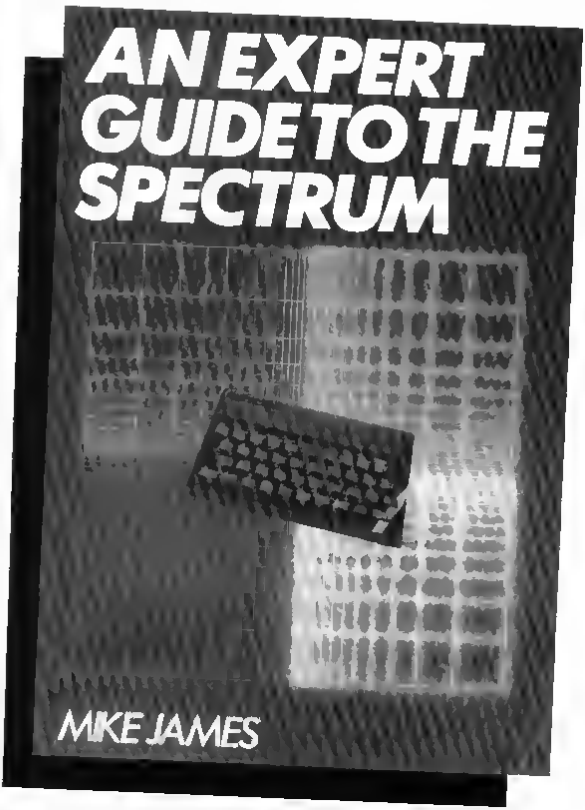

and then from back to front That can only be because of the complexity of the subject and not its treatment on the pages And even if subsequent readings and necessary then that should require little effort for this is one of the most valuable books I have read this year

"An Expert Guide to the Spectrum" is written by Mike James, published by Granada and costs £6 95

ISBN 0-246 12278 1

Choosing and Using a Micro Computer — Alan Radnor, Howard Kahn

"Choosing and Using a Micro Computer" and not only that but also 18 original programs Original programs like "Radius", "Patterns", "Compound Interest" and all for £2 50 No I didn't think it was likely either but what the heck it was a raining Saturday afternoon the type that made you wish it was Monday morning, Oh! and I had a cold as well and apart from darning some socks there was little else to do so I took a brouse through the 140 page Fontana Paperback

The credits were certainly impressive, Alan Radnor is a journalist and producer of TV computer programmes Howard Kahn lectures in computing at Manchester Polytechnic The intentions are valid — ' written for everyone who is thinking of buying a computer for the first time and wants to know what it can do, which one to chose the rudiments of how it works, now to set it up and how much it will all cost" and 18 original programs as well

Special features includes a questionaire which tells you at a glance which micro is best suited to your needs a sample text program to use in the shop, a micro comparison chart showing the capabilities of each make, an explanation of computer jargon and 18 original programs

There is, I am convinced a need for such a book Difficult as it is to believe there are still people around who are looking for some basic commonsense advice on computing and computer buying The cover notes suggest that "choosing and Using a Micro Computer" might be

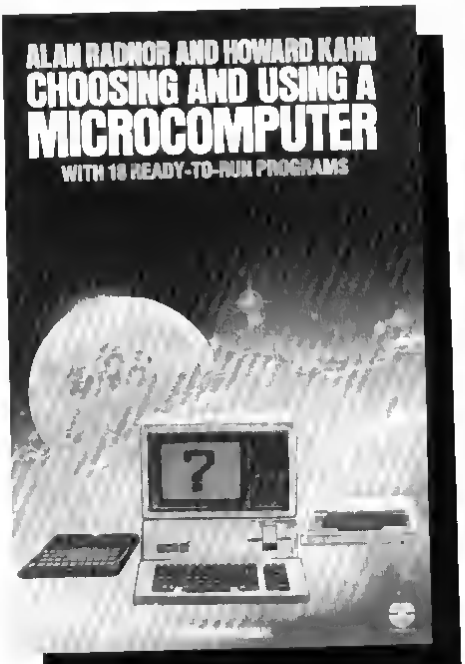

it Even on a rainy Saturday, cold and all I was not convinced that the text matched those intentions

Seventy pages cover who needs a computer, what one is what one can do, setting up the computer and information on software Seven pages would have done The text is vague and mostly irrelevant rambling, dated and largely useless

Am I being too critical, what of the 18 original programs Any program for someone who doesn't already have a computer must be original Those of us who do will recognise those listed above and the rest of the 18 O Ps to be the same as the ones that would fill these pages and excite us when we were still playing with ZX80 's Why they take up almost half of the book I do not know

The nicest thing that happened on the rainy Saturday afternoon, and this is original, was having the cold

"Choosing and Using a Micro computer" is written by Alan Radnor and Howard Kahn published by Fontana and costs £2 50
ISBN 0-00-636624-4

The Art of Micro Design — A.A. Berk

"The Art of Micro Design' is one of those 'Text book' books that manages to successfully cross over into the general interest category Its ability to do that is due to the author's awareness of the difficulty that people have in putting together a sufficient understanding of the workings of a microprocessor

Maybe I should clarify what I mean by general interest The book is aimed at engineers and enthusiasts who wish to gain a practical working knowledge of microprocessor system design Naturally being of general interest it restricts itself to 8 bit microprocessor systems As you might imagine it amounts to fairly demanding reading but it is of general interest as it assumes minimum previous knowledge of electronics while it covers the topics in sufficient detail to allow the reader to design around microprocessor circuits

I met this fellow recently who lists being a fisherman and a defence systems designer on his C V He pointed to the fact that it now wasn't possible for the hobbyist to compete with technology from the kitchen table or anywhere else for that matter Enthusiasts who have taken technology to where it is today are being forced from their pastimes because of it I had to agree

Three hundred consuming pages later I'm not so sure Using three actual MPU s — the Z80, 6800 and the 1802 — as examples Mr Berk offers actual data and principles of reading data sheets which could be applied to any MPU Subsequent discussions on bus structures memory, input/output devices and interfacing are detailed and supported by examples

Later chapters develop the new knowledge to consider the use of the micro in computer systems from control and data collection machines to local area networks

No more is required of the reader than an understanding of logic gates and some general electronic theory Four appendices offer any further background required and the text provides rather than assumes any more advanced knowledge

The author manages throughout to convey concepts and principles which are highly theoretical by reference to practical situations and standard hardware His intention was to enable the reader to have a sufficiently complete understanding of microprocessor design to be practical, in this he has been highly successful

"The Art of Micro Design" may plant the seed for a whole new crop of micro controlled systems I shall certainly recommend it to my hobbyist friends his hitherto frustrated fellow enthusiasts and daunted and bewildered engineers
"The Art of Micro Design" is written by A A Berk and published by Newnes Technical Books
ISBN 0 408 01403 2

MAIL ORDER PROTECTION SCHEME

If you order goods from Mail Order Advertisers in this magazine and pay by post in advance of delivery, this publication will consider you for compensation if the advertiser should become insolvent or bankrupt, provided

1 You have not received the goods or had your money returned, and
2 You write to the publisher of this publication explaining the position not earlier than 28 days from the day you sent your order and not later than 2 months from that day

Please do not wait until the last moment to inform us When you write, we will tell you how to make your claim and what evidence of payment is required

We guarantee to meet claims from readers made in accordance with the above procedure as soon as possible after the advertiser has been declared bankrupt or insolvent to a limit of £1,800 per annum for any one advertiser, so affected, and up to £5,400 p a in respect of all insolvent advertisers Claims may be paid for higher amounts or when the above procedures have not been complied with, at the discretion of this publication but we do not guarantee to do so in view of the need to set some limit to this commitment and to learn quickly of reader's difficulties

This guarantee covers only advance payment sent in direct response to an advertisement in this magazine (not, for example, payments made in response to catalogues, etc received as a result of answering such advertisements

CLASSIFIED ADVERTISEMENTS ARE EXCLUDED

Keyboard masks

A simple idea that takes a genius to invent. Enter J L Phillips of Dorset.

Many Spectrum owners have interfaced a joystick with their computer to enjoy playing those games which are suited to such control. Indeed, there is a welcome practice among software houses to produce cassettes which are compatible with available joysticks. However, more and more games are becoming available which are not so obviously suited to joystick control and as their complexity increases, so does the number of keys which are required to be operated during the course of the game.

A certain amount of manual dexterity is called for, which adds to the interest and entertainment but the need to remember which keys are to be used, and for what purposes can be tedious, and the continuad accessibility of all the unused keys is an unnecessary and sometimes irritating complication.

There are keyboard overlays available, of course, which help in readily identifying the keys in use for a particular game, but these suffer from two disadvantages: first, the remaining keys are still obviously accessible and second, these overlays are designed for use with the standard Spectrum keyboard and not with the typewriter style keyboards in which many Spectrum computers are eventually housed. Moreover, the distances between the rows of keys on these "add on" keyboards are so small that a simple keyboard overlay would be so flimsy as to be impracticable.

In fact, it is quite feasible to make very functional and effective masks which not only provide quick reference to the control keys but also deny access to the unused keys, removing them from sight and any possibility of confusion.

In the description below, the dimensions are those which I have found suitable for the DK Tronics keyboard but the principle is applicable to any similar unit, the only variation being in readily measureable dimensions. The mask is made up of four basically similar pieces of folded card of postcard thickness. Each piece is formed into the shape of an inverted U section, as shown in Fig 1.

It will be found that these dimensions are such that the card will surround and cover one of the four rows of keys, locating itself at the ends of the keyboard cut-out, resting upon the upper surface of the printed circuit board and with the top face just clearing the tops of the keys. To permit access to particular keys in the row, remove appropriate sections of the card, as shown in the example. When the four pieces, one for each row, have been cut as necessary, they are stapled (or glued) together through the long sides, eg at positions A, B and C. The top surfaces are then labelled to indicate the control functions of the adjacent exposed keys. (I found a combination of Dymolabel on black card to be particularly effective.)

Fig 2 shows a plan view of a mask constructed in this way for use with the game 3D Ant Attack (Quicksilva).

For games requiring the use of but a few keys, it would be possible to make up the mask from fewer, broader pieces but I favour the use of four pieces nonetheless because of the consequent support given to the mask by its five legs down to the printed circuit board. Although only thin card is used I have found a mask constructed as described to be quite rigid and serviceable. Use of the device has been most successful permitting more concentration upon the game itself, thus adding considerably to the enjoyment.

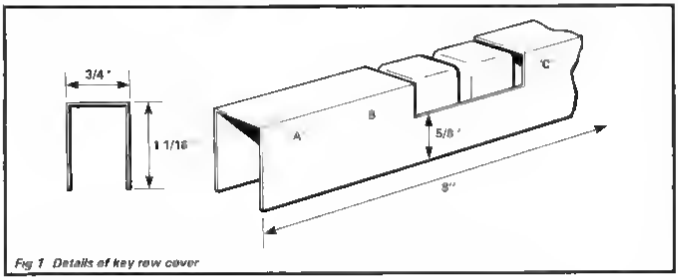

Fig 1 Details of key row cover

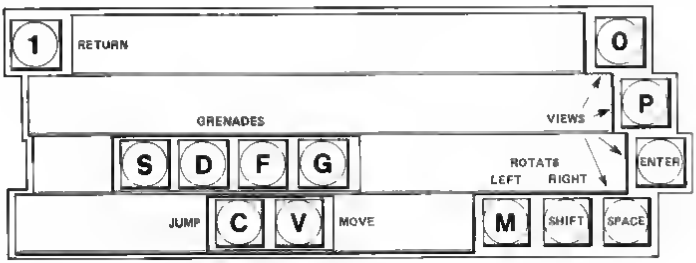

Fig 2 Mask layout for 3D Ant Attack

The 1K Corral

Getting a quart into a pint pot is easy compared to getting a program in 1K! A selection of the impossible

Adding machine
Mervin J Cagle

A useful little program to turn your computer into an adding machine but what is special is the routine to align the decimals

This can be utilised for any program which requires figure work involving decimals

Another tip from Mervin is that you can economise when using this program by turning the printer paper around and re using it

```
    1 REM "ADDING MACHINE"
    2 GOTO 60
    3 LET B=0
    6 IF E=0 THEN GOTO 21
    9 LET B=INT (LN (ABS E)/LN  1
0)
   12 IF 1>ABS E AND ABS E>0 THEN
 LET B=0
   15 IF .1>ABS E AND ABS E>=1 TH
EN LET B=-1
   18 IF E<0 THEN LET B=B+1
   20 IF E$="" THEN LPRINT TAB 21
-B;"TOTAL"
   21 IF E=INT E THEN LPRINT TAB
20-B;E;".00"
   23 IF E=INT E THEN RETURN
   25 LET W=10*E-INT ((E*10)+.5)
   27 IF -1E-8<W AND W<1E-8 THEN
LPRINT TAB 20-B;E;"0"
   29 IF -1E-8<W AND W<1E-0 THEN
RETURN
   31 LPRINT TAB 20-B;E
   33 RETURN
   60 LET W=0
   70 LET E=0
   80 LET T=0
  100 INPUT E$
  120 IF E$="" THEN LET E=T
  130 IF E$="" THEN GOSUB 3
  140 LET E=VAL E$
  150 LET T=T+E
  200 GOSUB 3
  300 GOTO 100
```

Slalom
Andrew Norton

This down-hill skier program works on the ZX81 in 1K and is quite rapid even in slow mode The object is to move the skier using the keys "5" and "8", through 20 randomly positioned gates which scroll up from the bottom, without hitting the posts Your score is given at the end — over 15 is fairly good To make the game easier the gates can be widened (by altering line 50 slightly) and then changing line 120 to read IF X=Y+1 OR X=Y+2 OR X=Y+3 etc etc depending on how much wider the gate is made

S is the score, T the number of gates, X the skier's position and Y the position of the gate

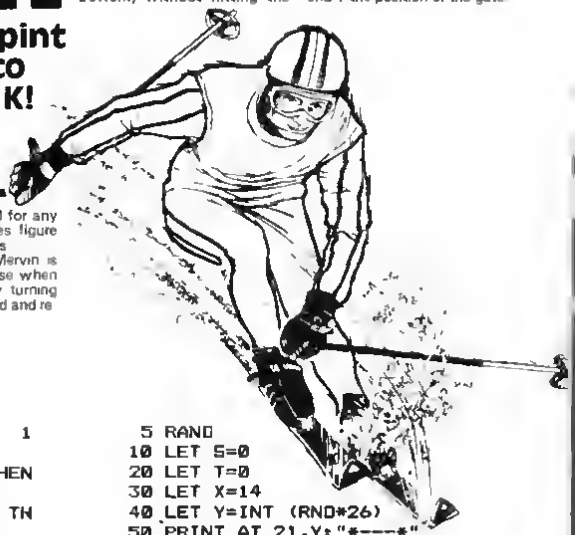

```
    5 RAND
   10 LET S=0
   20 LET T=0
   30 LET X=14
   40 LET Y=INT (RND*26)
   50 PRINT AT 21,Y;"*---*"
   60 FOR N=1 TO 11
   70 GOSUB 400
   80 SCROLL
   90 SCROLL
  100 GOSUB 400
  110 NEXT N
  120 IF X=Y+1 THEN LET S=S+1
  130 LET T=T+1
  140 IF T=20 THEN GOTO 300
  150 GOTO 40
  300 CLS
  310 PRINT "SCORE ";S;" OUT OF "
;T;
  320 STOP
  400 PRINT AT 0,X;" O "
  410 PRINT AT 1,X;"▗▀▖"
  420 PRINT AT 2,X;")▟("
  430 PRINT AT 3,X;")▟("
  440 IF INKEY$="5" AND X>0 THEN
LET X=X-1
  450 IF INKEY$="8" AND X<20 THEN
 LET X=X+1
  460 RETURN
```

Equations
David Webber

This program can solve equations of the type

A (x * * b) + C (x * * d) + E(x * * f) = S

providing A b,C d E f and S are known, by a system of trial and error

The program starts x at 0 and increases by 1 for each check once the equation is greater than S then the trial value of x is reduced by one and the trials are started again this time with a increase value of 0 1

This system is repeated with ever decreasing increments but line 112 limits the accuracy to six decimal places

If you are dealing in large values then it is possible to alter the value of M in line 2 to accomodate (ie 10, 100 etc)


```
  1 PRINT "(A*(X**0))+(C*(X**D)
)+(E*(X**F))=0"
  2 LET M=1
  3 LET M=0
  4 FAST
  5 PRINT "A?"
 10 INPUT A
 15 PRINT "B?"
 20 INPUT B
 25 PRINT "C?"
 30 INPUT C
 35 PRINT "D?"
 40 INPUT D
 45 PRINT "E?"
 50 INPUT E
 55 PRINT "F?"
 60 INPUT F
 65 PRINT "S?"
 70 INPUT S
 71 GOTO 77
 75 LET N=N+M
 76 GOTO 80
 80 LET X=N
 90 LET T=(A*(X**0))+(C*(X**D))
+(E*(X**F))
 100 LET U=(A*((X+M)**0))+(C*((X
+M)**D))+(E*((X+M)**F))
 110 IF T<=S AND U>=S THEN GOTO
124
 112 IF U-T>-.000001 AND U-T<.00
0001 THEN GOTO 140
 115 LET X=N+M
 116 GOTO 75
 128 LET M=M/10
 130 GOTO 80
 140 PRINT "X=";X
```

Jailbreak
Jens Philipp

I have deliberately avoided the scrolling type of game as there are many around which, although clever, seem to be all that people do when writing a 1K game

The aim of this game is to free as many prisoners as possible The prisoners — X — are moved from right to left by pressing 1 Patrolling the top of the prison walls are the guards who will catch you if they are above you However, if you are standing beneath a pillar then the guard cannot see you

When your man has reached the left hand side of the screen then another starts from the right The number of prisoners that have escaped is shown in the left corner of the screen

If you are caught then press newline to restart the game

```
 10 LET X=PI-PI
 20 LET A$="
"
 30 LET B$="  "
 40 LET C$="
"
 50 PRINT AT VAL "10",VAL "0";A
$
 60 PRINT B$
 70 PRINT AT PI-PI,PI-PI;VAL "4
0"*X,"FREE"
 80 LET N=VAL "28"
 90 LET C$=""+C$( TO VAL "27")
 150 IF RND<PI-INT PI+X THEN LET
 C$(VAL "2")="■"
 160 PRINT AT VAL "9" ,PI-PI;C$
 170 LET N=N-(INKEY$="1")
 180 IF N=VAL "3" THEN GOTO VAL
"500"
 190 PRINT AT VAL "12",N-PI/PI;"
*"
 200 IF C$(N)="■" AND B$(N)="" T
HEN GOTO VAL "600"
 210 GOTO VAL "90"
 500 LET X=X+.025
 520 GOTO VAL "70"
 600 PRINT AT VAL "10",N-PI/PI;C
HR$ 141;AT VAL "11",N-PI/PI;"$";
AT VAL "1",N-PI/PI;"■"
 630 PRINT AT CODE ":",CODE "£";
"CAUGHT"
 640 INPUT D$
 650 CLS
 660 RUN
```

Jumper
Luuk Hilhorst

In this simple but irritatingly addictive game you have to jump over the balls (*) by pressing 0 to jump.

When you run the program you will see the ground, the jumper and the moving balls.

Lines
10-20 set up string with the balls
40 change the position of the balls
60 70 check if the jump routine is required
80 print balls
90-95 whet the jumper hee hit
100 104 jump routine

```
  1 LET X=6GN PI
  2 LET G=NOT PI
  3 FOR I=NOT PI TO CODE "2"
  5 PRINT AT 2,I;CHR$ 137
  6 NEXT I
 10 LET A$="  *   *         *
*    *   *"
 20 LET A$=A$+A$
 30 LET A=NOT PI
 40 LET A=A+SGN PI
 45 PRINT AT X,10;" "
 50 IF A=31 THEN GOTO 30
 60 IF X=1 AND INKEY$="0" THEN
GOSUB 100
 70 IF X=0 THEN GOSUB 101
 80 PRINT AT 1,0;A$(A TO A+31)
 85 LET G=0+1
 90 PRINT AT X,10;
 95 IF PEEK (256*PEEK 19399+PEE
K 16390)=23 THEN GOTO 110
 96 PRINT "Y"
 97 GOTO 40
100 LET Y=4
101 LET Y=Y-1
102 IF Y=0 THEN LET X=1
103 IF Y>0 THEN LET X=0
104 RETURN
110 PRINT "DEAD"
120 PRINT AT 0,0;"SCORE:";S
```

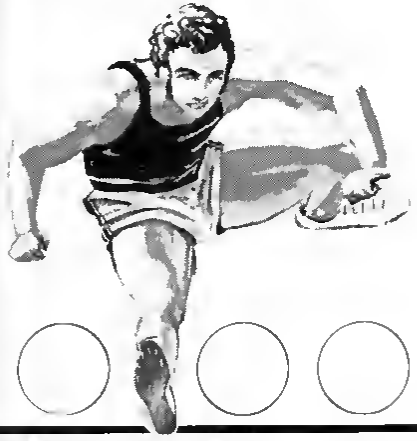

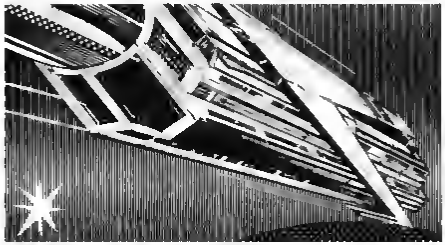

Asteroids
P Steer

As captain of the space freighter Spectrom you have to negotiate through the asteroids to reach the time warp. Your ship "H" is controlled by keys 0 and 9 to move left and right and you also have the luxury of ten laser shots which will penetrate five places ahead of you. Fire your laser with key 1.

A very sophisticated program for 1K!

```
  5 LET W=VAL "10"
 10 LET D=VAL "5"
 15 FOR E=VAL "0" TO VAL "149"
 20 SCROLL
 25 PRINT AT VAL "19",INT (RND*
VAL "0");"00"
 30 PRINT AT VAL "0",D;
 35 IF PEEK (PEEK VAL "16390"+V
AL "256"*PEEK VAL "16399")=CODE
"0" THEN GOTO VAL "1000"
 36 PRINT VAL "0";D;"H"
 40 LET D=D+(INKEY$="0")-(INKEY
$="9")
 45 IF INKEY$="1" THEN GOSUB VA
L "100"
 46 IF D>VAL "9" OR D<VAL "0" T
HEN LET D=VAL "0"
 50 NEXT E
 51 PRINT AT CODE "+",CODE "";"
TIME WARP"
 52 FOR S=VAL "0" TO VAL "30"
 53 SCROLL
 54 PRINT "..     +     .."
 55 NEXT S
 56 CLS
 60 PRINT "YOU MADE IT"
 65 GOTO VAL "1010"
100 FOR S=VAL "1" TO VAL "5"
105 IF W<VAL "1" THEN RETURN
110 PRINT AT S,D;"-"
115 PRINT AT S,D;" "
120 NEXT S
125 LET W=W-1
126 IF W<1 THEN PRINT "NO ENERG
Y LEFT"
130 RETURN
1000 PRINT "■"
1010 PRINT "SCORE=";E
1020 PRINT "ENERGY LEFT=";W
```

Quicksoft

Clive Smith lurks among some more unusual programs

Rainy Day Cases Computer Simulations

Ray the Ed has just dropped off a load of cassettes for me to review... sorry wife, I shall have to stop the decorating and press on with these (he he!)

First of these is Rainy Day, nothing to do with rain but a compendium of games to play when it's raining. If you're rich you can use your Currah speech unit and the program is compatible with a number of joystick interfaces.

There are three games which you can play. Game 1 is called 'puzzle unit', where you can choose one of ten pictures which are jumbled up. Then, with the aid of the cursor, you have to put them back into their original form.

Game 2, called 'Code-breaker', is based on the Mastermind game. Instead of colours though, they use numbers which makes it more difficult. You have to break the code within 15 attempts and if you are successful a safe door will open.

Game 3 on the tape is not really a game at all but a reaction test. A ball is dropped from the top of the screen into a glass at the bottom of the screen and you have to hit a key before it reaches there. Comments are made on your ability.

Not a bad tape for £2.99 which I think has been aimed at the 10 to 16 age group. (To tell you the truth I couldn't do the pictures). Spectrum 48K only.

Double Dealer M F M Software

As you might guess from the title, it's a card game. There are two games, one on either side.

Game 1 is 'Black Jack' or for the less informed, 'Pontoon'. A fairly simple game where you are dealt two cards and with the cards you have or more if you require, hope they add up to 21. Go over 21 and you have 'bust' and lost. If your cards are less than 21 you have the option of either 'sticking' with what have got and hope the computer can not beat you or 'twisting' and have another card to try and reach 21.

On the other side the game is a little more complex, but nothing as complicated as bridge. It's 'Stud Poker', one of the best gambling card games there is. I won't go into the rules now, but basically each player has a 'hand' which carries a value. You have to try and assess the value of your opponent's cards and if you think your cards are worth more than his, then you bet money which he has to equal to stay in the game. If he has a low value he can 'fold' and drop out. However he might have a low value and try and bluff you. The computer will play the most experienced player and has all the abilities of bluffing and clever betting.

A very good game and well written, but I thought the layout of the cards could have been better. For the 'Mavericks' amongst you it's played with a French deck with 2 as a wild option.

Double Dealer is for the 48K mavericks only. £6.50.

Athlete Buffer Micro Ltd.

To keep the Olympic spirit go out and buy this tape. There are five events which you can take part: 2 sprints, 2 hurdles (110 & 400 metres) and the hammer throw.

In the track events you compete against two other athletes. To win each race you have to press a key which increases your effort as you run. Too much effort and you will fall flat on your face with exhaustion, too little effort and you come in last. A scale at the bottom of the screen shows you how much effort you are using and also a scale of what distance is left to run.

In the hurdles you have another key to press to make your man jump.

There are facilities for training and a choice of event. Graphically it's not bad but there is an awful lot of time wasted with menus between each event.

Overall 'Good fun' and your money is not wasted. 'Athlete' is for the 48K owners only. £5.95.

Blockbuster Compusound

Based on the TV series of the same name, Blockbuster is a quiz game. You get two cassettes in a presentation box and hundred of questions to answer. It's a game of speed and skill. The question is flashed across the screen and the first person to hit a key can answer it.

The screen shows a honeycombed grid and for each correct answer one space is filled in with your colour. The idea is to get from one side of the screen to the other and block your opponents route.

You can either play the computer or a friend. There are also different skill levels to choose from.

A very well thought out game and clever use of questions if you like quizzes I'd recommend it to you.

Blockbuster is written for the 48K Spectrum and will cost you £5.95.



XDR Xorsoft Spectune

There are many 'make music' tapes about and this is one of the better ones.

Without the use of external hardware you are limited to what the spectrum can offer and this program makes use of everything the spectrum has. It turns the Spectrum into a piano keyboard with 34 notes. You can adjust the bar length and the crotchet length (sounds painful). It gives you a good range of all the sharps and flats etc. and it can also memorise your tune and play it back to you. You can also edit and change your tune and it can hold up to 2500 notes.

Written for the 48K it will set you back £5.95.

Oh Well! back to the decorating.

As seen in the national press

WIN a DREAM HOLIDAY in our GREAT COMPETITION

The Prizes:

You could win £2,500 to be spent on a dream holiday of your choice for you and your family!

Second prize – a complete Canon portable video outfit worth £1,300

Third prize – a BBC Model B micro computer plus software worth £450

Fourth prize – Minolta X700 camera with a 50mm lens and flashgun, worth £280

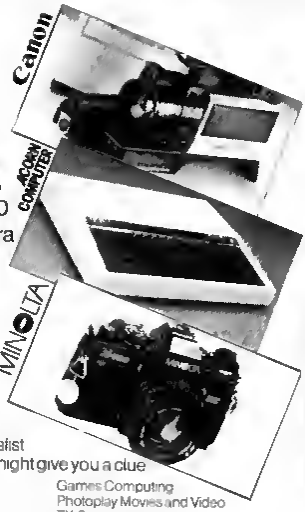

How to enter:

Just identify the twelve objects pictured opposite

HINT—the Argus Specialist Magazines listed below might give you a clue

Electronics Today International
Personal Computing Today
Movie Maker
Your Model Railway
Clocks
Home Computing Weekly
Bikebox
Ham Radio Today
Electronics
35mm Photography
Model Cars
Woodworker
Games Computing
Photoplay Movies and Video
ZX Computing
Military Modelling
Hi Fi Now!
Winemaker
Citizens Band
Model Boats
Video Today
Popular Crafts
Which Video?
Your Commodore

and write your (one-word) answers in the spaces provided on the coupon. For instance, if you think that number 9 is a record, write record in the space next to 9 on the coupon and so on. Then tell us in up to 20 words why **MAGAZINES MAKE IDEAL HOLIDAY READING**. Complete the coupon in BLOCK LETTERS and send it to *DREAM HOLIDAY COMPETITION, Argus Specialist Publications Ltd, No 1 Golden Square, London W1R 3AB* to reach us no later than 31st December 1984

Competition rules

1 The competition is open to all UK and Eire readers except employees of Argus Specialist Publications Ltd, their printers and their families.

2 As long as any reply is on coupon from the magazine, all your choices is used for each entry there is no limit to the number of entries per person. Photocopied coupons will not be accepted.

3 All entries must be received by 31st December 1984.

4 The prizes will be awarded to the first four entrants who identify the twelve objects correctly, and whose sentence is judged the most apt and original.

5 No correspondence will be entered into about the competition results. The judge's decision is final.

6 Winners will be notified by post, and the results will be published in a future issue of the magazine.

The 12 objects are

1	2	3
4	5	6
7	8	9
10	11	12

Magazines make ideal holiday reading because *(up to 20 words)*

NAME *(BLOCK LETTERS)* _____ AGE *(if under 18)* _____

ADDRESS _____

ZXC

Send to **DREAM HOLIDAY COMPETITION**, Argus Specialist Publications, No 1 Golden Square, London W1R 3AB

De-bugger

Getting a program typed in is often only the start of your problems. Ed to the rescue.

Typing in a program is a useful exercise. Apart from the patience required, techniques learned and the end program to be used, probably the most educational part of it is tracking down the bugs introduced by yourself or occasionally by our publication system.

In debugging you gain a much deeper insight and understanding on how the program actually works than by merely typing it in, but tracking down these errors is an art in itself and needs some skill. So here are some tips to help you in your efforts when faced with that cryptic error report!

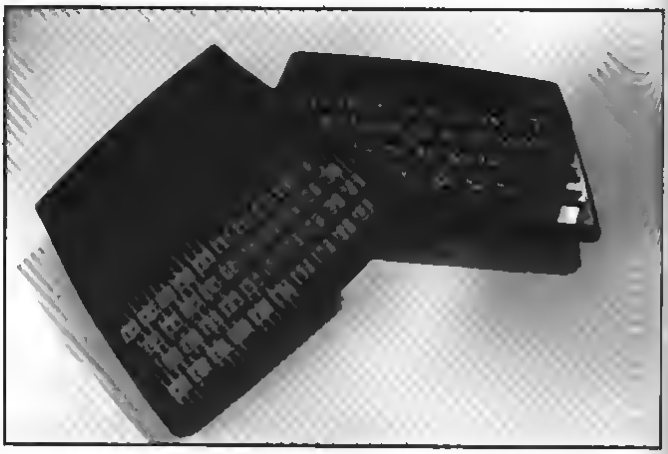

1 NEXT without FOR
Look back through the program either the loop has not been set up — no related FOR 'letter' = No1 TO No2 line, or the letter has been re used as an ordinary variable within the loop with a LET 'letter' = No

2 Variable not found
This is one of the most common errors. Again, the problem may not lie in the line where the error was detected and reported. If there is only one variable, which may be one or more letters or a string ($) variable, then that is the problem. There may be more than one variable in the line section reported and you will have to identify the offending one. In a line PRINT AT Y,X,A$ the culprit could be Y or X or A$. To find out which of them is causing the problem (it may be more than one) type in turn as a direct command

PRINT Y Enter/Newline
PRINT X Enter/Newline
PRINT A$ Enter/Newline

Note which produces the error report. Now look back through the program printout for the line which sets it up — usually a LET or FOR command. Did you leave it out? Does the program get there or has a GOTO/GOSUB been wrongly addressed?

3 Subscript wrong
Connected with DIM A(No) or DIM A$(No). If the number in the brackets on the line where the error is reported is greater than the one in the original DIM statement, is not an integer or is less then 1 than this report is generated. If the subscript — number in brackets — is a number then check and change, however, if it is a variable then follow the procedure for tracing variables. It has probably exceeded the limits, look for lines with the variable being altered with + — * / , if necessary add limiting code. For example

IF X >10 THEN LET X = 10

4 Out of memory
As well as for programs which are too big, it may happen if the previous program set RAMtop. Before despairing, enter CLEAR USR "a" - 1 on the Spectrum on the ZX81 SAVE the program, turn the machine off and on, then reload the program.

7 RETURN without GOSUB
Somehow the computer has reached a RETURN command other than via a GOSUB instruction. Check a GOTO hasn't been entered in place of a GOSUB. Check for a missing GOSUB.

B Integer out of range
An integer (whole number) either as a number of variable is too big or small and you are attempting to do something like PRINT AT 0,33 — not allowed! Check any variables involved as per report 2 and trace it back through the program looking for adjustments to it by + — * /. Add limiting code if needed — see report 3.

E Out of DATA
A Spectrum problem. Check the number of DATA items match the number of READs: usually one (or more) has been missed out. Attempting to reread a DATA list without first using a RESTORE command will cause this and it can happen on an auto start program saved with a LINE number). Good programming usually RESTOREs to the correct line number before using READ.

I FOR without NEXT
See report 1 but this time the NEXT is missing!

Note that the letters I have used for examples could by ANY letters not just A$, X, Y etc and depend on the particular choice of the programmer.

This is by no means a comprehensive list but I have tried to cover many of the most common error reports. Personally I get almost as much satisfaction from debugging as I do from programming. I do assure you, however, that there is absolutely no truth in the rumour that we deliberately inject bugs into our listings in order to introduce you to the dubious delights of debugging!

Mind Play

Greg Turnbull looks at games of strategy and skill.

Apocalypse Expansion Kit Vol.1 Nova Maps. Red Shift £4.95

For a review of the base program see page 49 of the Apr/May issue this tape is for wargamers who have grown accustomed to the maps of the main program The new scenarios use the esme rules, but give you a chance to try out different tactics They include

- **U.S.A.**

Mostly land based warfare high city densities for troop conflict Nukes would be very destructive For revenue play, the winning target is 240 points

- **S. AFRICA**

Another land battle, could support many player power zones Rapid and devastating troop attacks are possible

- **SE. ASIA**

A marvellous map, similar to that of 'Europe' Large sea areas for aquatic conflict The troop distances are large, making Nukes ineffective Many coastal bases are available this is definitely my favourite my favourite of the new maps

- **ARTIC**

Interesting picture of the North pole Only 201 revenue points needed to win in points-play

- **GALACTIC**

The last two maps take the play out of the usual terrestrial-based warfare This adds new interest to the game Wide spread centres allows for space ship dominance of this map

- **NETHER EARTH**

Unusual city names here, many appear to be based on a well-known Tolkian book!

Overall this tape is a useful addition to the Apocalypse range It prevents you from getting bored with the earlier situations

Apocalypse historical scenarios. Vol.2 Chapters 1 & 2. £4.95 each.

These are four new expansion programs, with data files They MERGE with the main game Unfortunately this takes a long time, and to play a different game you have to reload the whole lot! The advantage is that you essentially have five different games totalling some 400K The rules are slightly altered, as are start conditions, which helps to keep you interested in playing out the situations again and again This feature significantly extends the useful life of the program Red Shift say it is selling as well now as when it was first produced last year

In all four programs the centres are already distributed, and troops Deployed for you The players merely decided which empire or force they wish to assume then straight on with the play Specifically the programs are

- **DECLINE AND FALL (OF ROME)**

Disease is the main change here Although random its local effects are very significant on your troops

The combat phase is slightly changed However it is still based on an input number of divisions used This can be set by the player and is perhaps not the most satisfactory method of deciding who wins a battle

- **NAPOLEON'S CAMPAIGNS**

Generals are introduced here their symbols can be viewed on the main map A time limit for play is introduced As in real life the generals when defeated, may be either captured or escape No Nukes are allowed in these early period wargames

- **WAR IN THE PACIFIC**

An airstrike option replaces the Nukes phase of the main program Otherwise the rules are essentially the same

- **1984**

This is the most interesting of the new situations and the most graphically effective A world tension bar reflects changes in Europe Wars and the use of Nukes increases the indicator, disarmament decreases it If the bar turns red total global thermonuclear war ensues! This appears to be almost unavoidable in extended games hopefully not representative of real life The graphics of the world destruction are well done, and fun to watch

Overall some very useful additions to the Apocalypse range and moderately priced too Sadly no further expansions are planned as yet. However, future tapes should have M code maps for increased speed during loading

The quest for the Holy Grail. 48K Spectrum, Dream Software

This is a new graphic adventure game from an up and-coming company, Dream Software The current trend for flashy presentation packaging is continued The instruction pamphlet (like the program itself) contains witty notes and very few clues

As usual the tape takes forever to load, although the screen display is claimed as 'Cert XX' Once loaded you are straight into the adventure with very little to help you

The screen display is horizontally split Hobbit style, with scrolling pictures and text From the name you might expect this to be purely a medieval adventure, like 'Knight s Quest' You would be wrong it s right up to date including CND pickets, nuclear powered lamps, motorways etc

When a picture of a modern road with street lights appears, the text says "This picture is 500 years before its time, but who cares!" There are also various references to other programs for example Eugene from Imagine and if you ask 'who' you get "This isn't 'Valhalla' you know"

The usual adventure facilities save/load/quit are provided Plus graphics on/off, for when you get sick of seeing them time after time However no help or score routines are available nor is character interaction allowed

Don't be tempted to use bad language if you get frustrated the program doesn t like it It can even get insulting and will call you a nerd or a berk on some incorrect entries The response are quick as is the screen drawing Unfortunately the pictures don't help the action much, and are really just padding.

It is incredibly easy to get killed, this is where the program lets itself down You can be battered to death with a VIC20, or suffer one of numerous other equally nasty fates For example If you try to enter the cesspit, it says "You're not God and haven t learnt to walk on water yet" The program abounds with such humorous touches, one aspect which is good fun

Eventually you may manage to reach Camelot castle, just as you were thinking you had loaded the wrong tape by mistake Once inside I was immediately killed by the French guard He unclogs his nose in your direction and you die a horrible green death!

The film buffs among you will recognise this as a reference from the hilarious "Monty Python and the Holy Grail" This appears to have been the inspiration for the program, those who have seen the film will therefore be at an advantage For instance You can die at the hands of the knights who say 'NIC', and get frizzled into a pile of bile salts! (Your fate can be quite gruesome at times)

Ultimately you get frustrated with going through the early stages so often The terminal boredom sets in as dying is so easy, and happens very quickly You merely get transported back to the start to try again So for all its comic touches this program is already out of date by today s high standard of games

The copying of a Hobbit style screen and the addition of Monty Python ideas doesn't manage to hold your interest The text and scenarios soon become tiresome, causing you to lose any incentive to try and progress further Sorry Dream, better luck with the next attempt

ZX COMPUTING

Lineage 40p per word

Semi display £9 00 per single column centimetre Ring for information on series bookings/discounts

All advertisements in this section must be prepaid
Advertisements are accepted subject to the terms and conditions printed on the advertisement rate card (available on request)

01 - 437 0699

Send your requirements to:
JANE EOMUNDS
ASP Ltd., 1 Golden Square, London W1

SOFTWARE GAMES

SPECTRUM SOFTWARE CLUB

★★ LOWEST COST AND FREE CASSETTE ★★

★ Hire and exchange games from just 50p
★ Buy new games at the best possible discount
★ 100's and 100's of games to choose from
★ A regular newsletter with details of new releases etc
★ Every new member gets a **FREE BLANK CASSETTE**

Send just £3 95 and we will rush you your membership kit and free cassette

SPECTRUM SOFTWARE CLUB (ZX),
Video International, 287-291 High Street, Epping, Essex. CM16 4DA. Tel: 78 78583
Or send a stamp for a catalogue.

CURRENT SPECTRUM PROGRAMS

Tradewind (£5 Cassette, £9 50 Microdrive)
Buy a ship provisions and cargoes to trade between the harbours of the Coral Islands. Make a fortune if the weather and Pirates let you live long enough to master seamanship and economics. A strategy/adventure game with graphics for 48K

Jersey Quest (£5 Cassette £8 50 Microdrive)
Jersey Quest (£5 Cassette, £9 50 Microdrive)
Follow right an accident you are stranded in the labyrinth of time and must find your own way back to the Present with the aid of Paradins and objects from Jersey Folklore Hi text only adventure for 48K in machine code (Qu-Ill)

Morse Tutor (£4 Cassette, £8 50 Microdrive)
4 18 words minute variable spacing variable number of groups of random letters numbers or mixed random sentences own message single characters (including punctuation) variable Pitch FEEDBACK via screen Printer or SPEECH (Phonetic alphabet via Currah µ Speech on 48K version only) and repeat facility 16K and 48K versions on one cassette 48K only on Microdrive cartridge
Prices exclude VAT but include postage

W D Software, Hilltop, St Mary, Jersey, C I
Tel (0534) 81392

SPECTRUM SOFTWARE

Large range of titles credit card orders by phone or ring for further details and price list

FABULOUS PHONES,
72 High Street, Orpington, Kent BR6 0VQ
Tel: (0689) 74051

SPECTRUM OWNERS My new software house requires original games (48K) J Bagley 11 Park Hill Road Chingford E 4

THE BIZ! The amazing new Spectrum 48K record world game £3 50 Includes postage payable M Taylor 58 Aspinall Road London S E 4

SPECTRUM SYNTHESISER – Metronome drum sounds rolling chords and piano options Play the guitar – for beginners Reading Music – learning from basics with keyboard practice All 48K Spectrum £5 00 each Scott Mossie No 11 Bungalow Firlands Burghfield Common Berks

COMPUTER SOFTWARE AND ACCESSORIES send 9 x 16p stamps for free lists stating which computer to Electronic Facilities 3 High Street Sandy Beds SG19 1AG

SOFTWARE APPLICATIONS

SPECTRUM 48K

Book-Keeping and Monthly Financial Accounts
by A. G. CLOUGH F C A.

A totally flexible voucher based COMPLETE BOOK-KEEPING SYSTEM on traditional double entry principles BANK RECEIPTS AND PAYMENTS PETTY CASH IMPREST SALES JOURNAL AND LEDGER PURCHASE JOURNAL AND LEDGER JOURNAL ENTRIES NOMINAL LEDGE TRIAL BALANCE
Up to 250 Nominal Ledger accounts Up to 400 Sales and 400 Purchase Ledger accounts Facilitates easy preparation of MONTHLY BALANCE SHEETS and PROFIT AND LOSS ACCOUNTS All records tangible — uses 32 column printers Printer Vary user friendly — little expertise needed 60 page manual Full demonstration exercise 5 programs over 100K Supplied on tape with three additional marked tapes for Data saving Microdrive adaptable Price £30 inc P&P from
Enhanced edition for 80 column printer available shortly Enquiries invited

MANX TAPES, GAREY VEG, GLEN AULDYN
RAMSEY, ISLE OF MAN

HOME ENTERTAINMENTS

SPECTRUM SOFTWARE — presents 2 great games!

WORLD CUP '86 (48K) £3 50
A complete simulation of the World Cup including qualifying stages full tables and results Pick your own England squad and guide them through to the Finals in Mexico and win the famous trophy It's not as easy!

STRATEGY 8 (16/48K) £3 50
A great new strategy board game for 2 players Chess players and logical thinkers will love it

Or why not join the
HOME ENTERTAINMENTS TAPE EXCHANGE CLUB?

- Once only Membership Fee — £6
- Over 100 top selling titles (many more to be added shortly)
- Free program of your choice upon joining
- Exchange as many programs as you like at £1 per tape

Cheques/POs to:

HOME ENTERTAINMENTS
6 Hampton Road, Blackpool FY4 1JB

SPECTRUM 48K

MOVIE-MAKING ANIMATION & MUSIC

Prog £7 incl
MORSE CODE READING
Progs for ZX81 (1K) £7 incl and SPECTRUM 16 48K £8 incl
S A E for full details

Pinehurst Data Studios
69 Pinehurst Park
West Moors, Wimborne, Dorset BH22 0BP

SICK OF "BLASTING GAMES?"
BORED WITH POINTLESS "ADVENTURE GAMES?"

Then use **'Treasure Hunt Tool Kit** to solve all programs codes etc and win big cash prizes Available for 48K or 16K Spectrum format Send cheque/P O £4 95 to

G W Components
50 Oaktree Lane,
Mansfield
Notts NG18 3HL

SOFTWARE APPLICATIONS

Pools Prediction

Made easy on 48K Spectrum Outputs Best Draws Homes and Aways Features Analysis Draw Finder which allows program to learn from its own mistakes however small

No family database required Prints team form comparison graphs Analyses and graphs results every week Takes full account of Cup Matches Promotion/relegation menu

194 Dividends won by writer so far (This is the best and most scientific of any program I have seen — Mr R A F Secretary Orp nglon Computer Club)

(Once again thank you for one of the best investments I have made — **Mr D L S Feltham**)

NORSE RACE
Horse Race Predicter

Very successful and easy to use prediction for Flat Racing No knowledge of racing required Self Teaching program is never out of date Free permutation calculator with all programs

Ask for
British Pools at £8 95
Australian Pools at £8 95
Flat Racing at £11 95

Rombest Dept ZX
9 Hawkstone Avenue
Newport Shropshire
TF10 7SE Tel (0952) 813318

SPECTRUM I[illegible] In [illegible] ma[illegible] [illegible] ap[illegible] ablc uns opcable n s ble h[illegible] re[illegible] [illegible] such revealing hidden Basic n machine code progams plus h n s tips plus r cod ive supplement – £3 ZX dimensioned (office ZC1 29 Chadderton Drive Unsworth Bury Lancs

CUT your Home Heating costs This 12K long program for the ZX81 calculates the heating savings for various types of house insulation and so helps you choose the most cost effective type of insulation for your home Send SAE for further details or £7 99 for your copy to Harlequin Computing Dept ZX 18 Heywood Road Gt Sutton S W rral L66 3PR

BAR CHARTS n addr easy on your 48K Spectrum with pro data Automatically scales axes saves graph data allows update of data Ideal for sales rainfall share prices etc Charts Available on cassette for use with recorder and microdrive £3 50 Send cheque/PO to I D Pallmen 5 Mounticlair Court Northampton NN3 3DG Allow 28 days delivery

ALARMS

BURGLAR ALARM Equip ent Please visit our [illegible] sq ft showroom s or write o phone for your free catalogue CWAS Ltd 100 Rooley Avenue Bradford BD6 1DB Telephone (0274) 731511

SOFTWARE EDUCATIONAL

REAQING AND SPELLING PROBLEMS?
THEY END HERE

For any ZX Spectrum 5 years Adult
WORDS and LETTERS
Features include
* Moving Graph cs
* Enjoyable Tunes
* Words Changeable
* Teacher Advised

Learning becomes fun
2 programs 1 on each side for only **£4 95** Send SAE for details or make cheques/P O payable to
Webco Software
26 Nuns Orchard Histon
Cambridge CB4 4EW
Quick despatch Dealer enquiries welcome

KILSOFT

EDUCATIONAL REVISION PROGRAMS
48K SPECTRUM
GCE & CSE Biology Physics Chemis try Geog and Maths Suitable for home and schoo
ONLY £4 95 EACH
For fullest details write today
Interested in ASTRONOMY?
Suitable for serious O eve use but also for those who have t as a hobby
ONLY £3 50 [illegible] [illegible]

32 Brierlyn Avenue, Birchencliffe Huddersfield. Tel: (0484) 21491

SPECTRUM 48K SOFTWARE

Fed up with high priced glossy packaged mediocre games? You need our first games cassette DOUBLIT
DOUBLIT holds two top quality brand new games on one cassette PIT is a graph cs adventure which will take you into the dangerous depths of URWORLD to find the Staff of Life In credibly instantly appearing graphics in full colour SAC PAC needs skill and quick thinking as you strive to keep your factory supplied with fuel You will never believe the creatures out to stop you! Price **£5 00** inc P&P Send for a list of our 1 rst classrange of educational & application pie grams Cheques/POs to **Camel Micros 33a Commercial Road Weymouth Dorset**

FOR SALE

Replica Just [illegible] Colt 45 Automat c as used by U S Army Ideal stage prop with ammo £5 25 carr age 50p

Souls nose Po ce Special w th s lencer and ammo £4 50 Ca riage 50p

Colt 45 as used by U S Police Department Ideal stage prop with ammo £3 50 carriage 40p

Ideal for video f lm making Mail order only Send cheques or PO to **Razzamatazz, 99 Selhurst New Rd London SE25**

UTILITIES

LOGO

Software Research Danny Hladky presents or your ZX81 16K

3D Tracer Three dimensiona ob jects n cartnes an projection and persp **£5.00**

Superdraw 1 0A High speed p lo ter graphics solution for sin strat n Microtec **£3 25**

Magic Paint M Code screen dr with rade disc box mirr double **£3 00**

Flash Movie 3D demo **£1 50**

Send cheque [illegible] **Danny Hladky, Krimmerstrasse 10 D 6050 Offenbach Main, West Germany**

Add £1 5 p p UK and overseas trade enquiries welcome

QL UTILITIES

4 programs on microdrive for Sinclair QL to prevent D Rec ry overwriting the screen provide sing le key LOADing or DELETion of files repeat FORMATing of cart ridges and back up copying of whole or part of the cartridge **£10** item

W D SOFTWARE
Hill Top St Mary Jersey C I
TEL 0534 81392

COURSES

NEW TO COMPUTING

We a re here to help y u s pre ski ls in computing Ind v dual mod ules qualified t ch n practica course Ring **Computer Workshop on 01 318 5488 4 Lee High Road Lewisham London SE13 5LQ**
Ch ldrens' Holiday Courses also available

SERVICES

MICROORIVE TRANSFER TAPE

At last **MAJORITY** of your software can be transferred to Microdrive even out-dated commercially made games **WILL** run as intended

* The **NEW 007 MD** cassette an enables you to transfer the Headerless programs as well
* Includes an intelligent Header Reader which tells **YOU** if any special act ons required
* Does **NOT** require an additional Help tape
* Semi Automatic Fully automatic systems have proved limited

How it works Copies Code to the Microdrive using its push button copier **YOU** make a few very easy changes to the Basic loader part Save it to Microdrive and magic

INSTANT SUCCESS

007 MD IS JUST £5 95
(Europe +£5 Other areas +£1 50)

SPECIAL OFFER Membership of the **MICRODRIVE EXCHANGE** Newsletter club plus **007 MD** for just £10 (Or on cartridge for £15)

ZX-GUARANTEED (Dept. ZC)
29 Chadderton Drive Unsworth Bury Lancs BL9 8NL
Tel 061-796 5712

WANTED

SECOND HAND SPECTRUM GAMES wanted – originals only (with inserts etc) D sliked/Over zapped/dissappointing games – we'll buy them! Send list for offer by return! G Inglis 37 Cockburn Street Edinburgh EH1 1BP

ACCESSORIES

UNIT ONLY

Tidy units made in 3 styles and colour to suit all computers and their hardware At £23 99 inc p&p and VAT Send for details to

H/O 12 The Vineries Enfield Middx EN1 3DQ (Established 1870)

SPECTRUM RGB OUTPUT

Impossible? No Our RGB OUTPUT module is the answer to your prayers
* True TTL level outputs plus comp synch
* Can be used with any RGB/TTL monitor
* No modifications or internal connections
* Simply plugs into expansion port
* No separate power supply required

Price £89 95 + 50p P&P or SAE for details – please specify ZX & Spectrum options & ports

–adapt electronics– 20 Sterling Close Buckhurst Hill, Essex IG9 5TN

NEW SOFTWARE for 48K Spectrum Roadsafety for 5 years + £2 95 General knowledge family quiz £2 95 SLR Photography for beginners £2 95 Special offer – all three programs just £7 50 Free g it with all orders p&p inclusive Order direct from Astral Computing 179 Cornish Rd Chipping N[illegible] C[illegible]

REPAIRS

SINCLAIR SERVICE CENTRE
We have the spares fa all repairs to Spectrum ZX81 printer and RAM pack You pay £18 plus parts and return postage All units repa red to original standard using genuine Sinclair spares by our H N qualified staff Also available Spectrum memory update 16K-48K by exch £28 50 inc delive

Quantum 33 City Arcade Coventry or phone Coventry (0203) 24632

SPECTRUM ZX81

[illegible] T[illegible] H[illegible]
KEYS ARE LIKE YOU?

Problems solved with PR adaptor no soldering no dismantling just plugs in place Please state model **£8 95** plus 75p p&p PR adaptor plus reset switch (allows system reset) **£10 95** plus 75p p&p ZX supply repair service £5 95 inclusive Cheques & PO's to **PR Electronics 14 Bexley Close Doncaster DN4 6EL** 24 hour answerphone 0302 539545 0302 538747 German stockists **ERC Services Heinrichstrasse 93 4000 Dusseldorf W Germany**

UTILITIES

MICRODRIVE ONE (MDI)

48K Spectrum owners can now get the majority of their programs **running** on m drive with our 7 program package TC5 (£5.50) transfers the bytes MDI with its advanced header reader prog analysis bytes mover etc Gets them running Headerless V long or low start address - e.g. 16384

We believe that our package is the only one available that successfully transfers the majority of your programs

Microdrive One introductory price **£6.50**

Graphics Toolkit **£5.50**

SAE for more details

LERM, DEPT ZX, 10 BRUNSWICK GDNS., CORBY, NORTHANTS.

AUCTIONS

MICRO COMPUTER AUCTIONS

Regular monthly auctions for all micro hard and software.

Send for entry form or next catalogue to:

MICRO COMPUTER AUCTIONS (ZX)
Northington House,
59 Grays Inn Road, London WC1X 8TL.

TEL: 01 - 242 0012 (24 hours)

SOFTWARE

COMPUTER SOFTWARE
Business and Games for most Computers
Commodore 64 Vic 20 BBC Atari Dragon Spectrum MZ700 ZX81
New Releases for CBM 64 Spectrum BBC Atari Dragon Spectrum MZ700 ZX81
New releases for CBM 64 Spectrum BBC Every 2 weeks — just send S.A.E. and we send you a new list every 2 weeks
Altai C10 data cassettes 40p each 5 C15 data cassettes £2.40
5¼ Floppy discs S/sided — DL density £2.30 each or 5 for £10
Send to **M J Seward 31 Olaf's Road Stratton Buds Cornwall EX23 9AF Tel (0288) 4179**

LIBRARIES

SPECTRUM OWNERS

Why not use our software exchange service. With an extensive range of games educational programs etc. Only 50p per tape plus P&P
Send SAE for full details to
X Lent Software
8 Cheviots Highfield,
Hemel Hempstead HP2 5RD

LOOK! Any Program for any micro at 20% discount. Also the only tape exchange club specialising in today's Top 20 (spectrum commodore) Membership free. Write stating micro to Ham Software Library (ZX) Ham Lane Elstead Surrey GU8 6HQ. We've got the lot

AD INDEX

CURRAH μSPEECH

Speech Synthesiser for ZX Spectrum

The **CURRAH μSPEECH** is ready to talk immediately on power up has an infinite vocabulary and outputs speech and ZX Spectrum sound through your TV speaker There is no software to load with **μSPEECH** — sophisticated Gate Array technology means you can just plug in and start constructing words and sentences like this

LET $$ = "sp(ee)k (nn)(oo) (ee)vil" will say "speak no evil"! Further commands control the "voicing" of keys as they are pressed and an intonation facility allows you to add expression to the speech

μSPEECH is fully compatible with ZX Interface 1 and may be used with the **CURRAH μSLOT** Expandable Motherboard allowing easy expansion of your ZX system **μSPEECH** and **μSLOT** will also be compatible with the **CURRAH μSOURCE** unit when it arrives later this year allowing you to write **Assembler** and **FORTH** statements directly into your **BASIC** programs!

Top selling games like ULTIMATE'S Lunar Jetman feature **μSPEECH** voice output — watch out for other titles from Bug-Byte CDS, Ocean Quicksilva and PSS

μSPEECH is [illegible] from COMET W H SMITH WOOLWORTHS GREENS BOOTS JOHN MENZIES SPECTRUM STORES and good dealers nationwide — or use the form to order the **CURRAH μSPEECH** — winner of the CTW Product of the Year award 1984

CURRAH

To MicroSpeech Offer P O Box 1, Gateshead, Tyne & Wear NE8 1AJ

Please Supply **MicroSpeech** unit(s) at **£29.95** each incl VAT & P & P

MicroSlot unit(s) at **£14.95** each incl VAT & P & P

Name (please print)

Address (please print)

Postcode

I enclose a cheque/PO payable to MicroSpeech Offer value £

or debit my Access/BarclayCard No

Cardholder Signature

Credit Card Hotline 091 482 4687 Please allow 28 days for delivery Offer [illegible]

See us at Our PCW Show Stand 329

ONLY £129.95 INC VAT & POSTAGE

How much would you expect to pay for a dual 128K faat acceaa storage system tor your Spectrum that inciuded Centronics and RS232 interfaces and free word pro-casing software as standard?

Chences are it's a lot morn then £129 95. But this is what will buy you the Incredible Rotronics Wafadrive unit. There ara no extras – this price includes VAT and postage

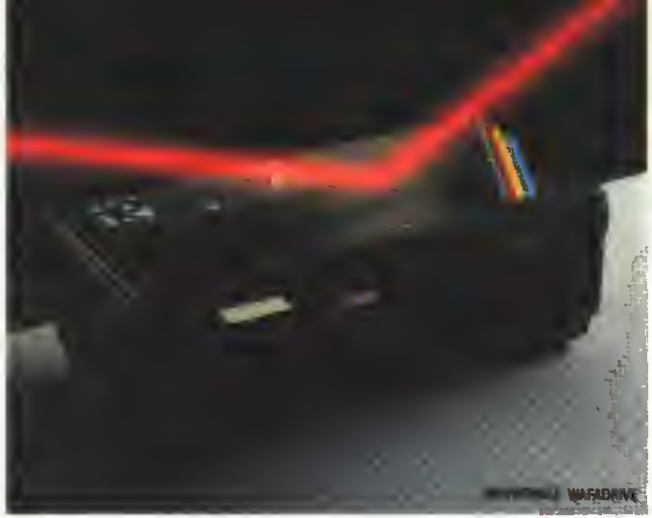

A fast reliable dual-drive storage system

Integrated System

The Wafadrive is a complete system which contains the micro interface, two 128K drives, RS232 and Centronics ports, all in ons attractively-styled, compact unit There is a minimum of connecting leads and no extra boxes to clutter the desk top. Like the majority of proles-sional systems, the units ara dual drive This offers the opti-mum balance between system flexibility and cost Built-in serial and parallel interfaces allow the direct connection of just about any popular printer

Fast and Reliable

The Wafadrive achieves very fast loading and saving, but not at the expense of reliability Extensive research and the use of high grade materials ensure that the Wafadrive will give years of dependable operation Data integrity is on a par with floppy disk The fully inter chengeable wafers are avail-able in three sizes – 128K, 64K ahd 16K Low capacity wafers give faster access They are therefore most suitable for program development applications The high capacity wafers ara suitable for more gerneal data storage Loading rate is well over ten timas as fast as cassette!

Software

Armed with the com-prehensive user manual, blank wafer and word processor supplied, you can uas your Wafadrive straight away There is also a rapidly growing range of software to enable the programmer and games player to exploit the Waladrive system to the full

Wafadrive for the 16/48K Spectrum is available now. Versions for other popular home computers are under development

Send a 16p stamp for a full colour brochure and information on software and accessories

FOR USE WITH THE SINCLAIR SPECTRUM

Please send me (enter as appropriate)

___	ROTRONICS Spectrum Wafadrive(s)	@ £129.95 each
___	16K wafer(s)	@ £3.95 each
___	64K wafer(s)	@ £3.95 each
___	128K wafer(s)	@ £4.95 each
___	Hextmirow Wagstaffia II (48K Hewsam)	@ £14.95 each
___	Space Wars/Seiddab Attack/Lunar Attack (48K Hewsam)	@ £14.95 each
___	Beer Barrow Wong's Loopy Laundry/ World Cup (48K Artic)	@ £9.95 each
___	Sherlaine (48K Softek)	@ £7.95 each
___	The Artist – graphic utility (48K Tasman)	@ £9.95 each
___	ZAP machine code development package (48K Hewsam)	@ £19.95 each
___	BRIDGE head	@ £9.95 each
___	Gantronics wire	@ £9.95 each

All prices include VAT and P&P — TOTAL £ ___

☐ I enclose a cheque/PO* made payable to SMT

☐ debit my Access/Barclay card* account no

(*delete as applicable)

Signature ___

Name ___

Address ___

ZX 10/84

Send to (no stamp required) **SMT FREEPOST, Groome Horton, Towcester, Northants, NN12 8BR**

Please allow 14 days for delivery

VISA

SMT